



Headquarter Office

PRINX CHENGSHAN (SHANDONG) TIRE COMPANY LTD.

98 Nanshan(N) Road, Rongcheng, China, 264300

+86-631-7517777 | info@prinxchengshan.com | www.prinxchengshan.com

AUSTONE
TIRES



PURSUIT OF EXCELLENCE

2020 version

**PASSENGER &
LIGHT TRUCK TIRE**

PRODUCTS BROCHURE

PASSENGER CAR



SUV&4X4



LIGHT TRUCK



VAN



TRAILER



ALL SEASON



WINTER



PASSENGER CAR

Rim Diameter	Aspect Ratio	Size	SP-701	SP-701 RFT	SP-7	SP-6	SP-601 SFT	SP-516	SP-802	SP-801	CSR72
12	70	145/70R12									69Q/S
		155/70R12								73T	
		165/70R12								77T	
		175/70R12					80H			80H	
13	35	245/35ZR19	93W XL								
	60	175/60R13								77T	
		155/65R13								73T	
	65	165/65R13								77T	
		175/65R13								80T	
		145/70R13								71T	
		155/70R13								75T	
	70	165/70R13					79T			79T	
		175/70R13					82T			SFT 82T	
		175/70R13 SFT								82T	
		185/70R13					86T			SFT 86T	
		185/70R13 SFT								86T	
	80	145/80R13								75T	
		155/80R13								79T	
		165/80R13								83T	
14	55	185/55R14								80H	
	60	165/60R14							75H	75H	
		175/60R14							79V		
		185/60R14					82H	82H	82H		
		195/60R14					86H			86H	
	65	155/65R14								75T	
		165/65R14								79T	
		175/65R14				82H		82H	82T/82T		
		185/65R14				86H	86H	86H	86H XL		
	70	155/70R14								77T	
		165/70R14								81T	
		175/70R14						84H	84H	84T	
		185/70R14					88H			88H/92H	
		195/70R14								91H/95H XL	
		205/70R14					95T				
	80	175/80R14								88T	
		185/80R14								91T	
15	45	195/45R15			78V						
	50	195/50R15			82V				82V	82H	
		205/50R15			86V						
	55	175/55R15								77H	
		185/55R15			82V			82V	82H		
		195/55R15			85V			89H	85V	85H	
		205/55R15			88V						
	60	175/60R15								81H/81Q	
		185/60R15				84H		84H	84H	84H	
		195/60R15				88V	88H	88H	88H	88H	
		205/60R15			91V					91H	
		165/65R15								81H	
	65	175/65R15							84V	84H	
		185/65R15				88H		88H	88H	88H	
		195/65R15				91V	91H	91H	91H	91H/95H	
		205/65R15				94V	94H	94H	94H	94H	
		215/65R15				100H					
	70	195/70R15				97T XL					
		205/70R15								100S XL/96H	
		215/70R15				98H					

Notes: * under development

PASSENGER CAR

Rim Diameter	Aspect Ratio	Size	SP-701	SP-701RFT	SP-7	SP-6	SP-601 SFT	SP-516	SP-802	SP-801	CSR72
16	45	195/45R16									
	50	205/45R16									
		195/50R16									
		205/50R16									
		225/50R16									
	55	195/55R16									
		205/55R16									
		215/55R16	97V								
		225/55R16									
	60	195/60R16									
		205/60R16									
		215/60R16									
		225/60R16									
	65	205/65R16									
	40	205/40R17									
		215/40R17									
		245/40ZR17	91W/91Y								
		205/45ZR17	88W XL								
17	45	215/45R17									
		215/45ZR17	91Y XL								
		225/45R17									
		225/45ZR17	94Y XL								
	50	235/45ZR17	97W XL								
		245/45ZR17	99W XL								
		205/50R17									
		215/50R17									
	55	225/50R17	*98Y XL	98W XL							
		235/50R17									
		205/55ZR17	95W XL								
		215/55R17									
	35	215/55ZR17	98Y XL								
		225/55R17	101W XL/97V								
		225/55ZR17		101W XL							
		215/35ZR18	84W XL								
18	40	255/35ZR18	94Y XL								
		265/35ZR18	97W XL								
		275/35ZR18	99W XL								
		225/40R18									
	45	225/40ZR18	92Y XL								
		235/40ZR18	95W XL								
		245/40ZR18	97W XL								
		255/40ZR18	99W XL								
	50	215/45ZR18	93W XL								
		225/45ZR18	91W								
		235/45ZR18	98W XL								
		245/45ZR18	100W XL	100W XL							
	30	255/45ZR18	103W XL								
		245/50ZR18		104W XL							
		255/30ZR19	*91Y XL								
		235/35ZR19	91W XL								
19	35	275/35ZR19	*100Y XL								
		255/35ZR19	96Y XL								
		245/40ZR19	98W XL								
		255/40ZR19	100Y XL								
	40	225/45ZR19	*96Y XL								
		255/45ZR19	104W XL								
	30	235/30ZR20	*88Y XL								
		245/35ZR20	95Y XL								
		255/35ZR20	97Y XL								
		275/35ZR20	*102Y XL								
	45	275/45ZR20	100V								
		195/55ZR20	*95V XL								
	21	295/35ZR21	107Y XL								
		265/35ZR22	102Y XL								

Notes: * under development

SUV

Rim Diameter	Aspect Ratio	Size	SP-301(★)	SP-302	SP-303	SP-306	MASPIRE M/T
15	70	205/70R15		96H			
		215/70R15		98T			
		215/70R15LT		104/101R 8PR			
		225/70R15			100H		
		255/70R15		108T			
	75	215/75R15	100T				
		225/75R15	102T				
		235/75R15		109S XL		109T	
		LT235/75R15 OWL					104/101Q
		P225/75R15		102T			
16	100	30X9.50R15LT		104Q			
		30X9.50R15LT OWL					104/101Q
		31X10.50R15LT		109S			
		31X10.50R15LT OWL					109Q
	60	235/60R16			100T		
	65	215/65R16			*100V		
		255/65R16	102H	109T			
	70	215/70R16	100H	100H			
		225/70R16		103T	103T		
		235/70R16		106T	106H		
		245/70R16		111S	107T		
		255/70R16			111T		
17	75	265/70R16		112T		112T	
		275/70R16		114T			
		LT265/70R16					121/118Q
		225/75R16		108T			
		225/75R16LT		115/112Q			
	75	245/75R16		111T			
		245/75R16LT		120/116Q			
		265/75R16		116S			
		LT225/75R16					115/112Q
		LT245/75R16					120/116Q
18	85	235/85R16LT					123/120Q
	100	205R16C		120/116S			
	55	205R16C		110/108S			
		235/55R17		99H			
	60	215/60R17			96H		
		225/60R17		99H	99V		
		235/60R17		102T	102V		
		255/60R17			106H		
		265/60R17		108S			
19	65	225/65R17		102H	102T		
		235/65R17		108T	108V		
		245/65R17		107T	111H		
		265/65R17		102T	102H	106T	
		265/65R17 OWL				116T	
	70	275/65R17		115T/119T			
		275/65R17LT		121/118R 10PR			
		285/65R17		116T			
		LT265/65R17					120/117Q
20	50	245/70R17LT		119/116S			
		265/70R17		115T	115T		
		265/70R17LT		121/118Q			
		225/50R18		101W XL	*99W XL		
		215/55R18			99V		
21	55	225/55R18			98W		
		235/55R18			104V		
		255/55R18			109V		
		225/60R18			100V		
		235/60R18			107V		
22	60	245/60R18			109V		
		255/60R18			112V		
		265/60R18		110T	110H		
		235/65R18			110H		
		265/65R18LT		*122/119R 10PR			
23	45	245/45R19			*102Y XL		
		285/45R19			111V		
		235/50R19			103W XL		
		255/50R19			107 V		
		225/55R19			*105W XL		
24	50	235/55R19			105W XL		
		245/55R19			103W		
		255/55R19			111V		
		315/35R20			*110Y XL		
		275/40R20			106V		
25	50	255/50R20			*109Y XL		
		30			*108Y XL		
		35			*105Y XL		
		285/35R21					
		275/40R21			*107Y XL		

LT / VAN

Rim Diameter	Size	SP-102	SP-101	SP-01	ASR71	CSR34	CSR35	CSR40CSR69	CSR80	CSR81	SP-112	CSR44	CSR50
12	145R12LT								80/78Q 86/84N8PR				
	155R12C		88/86Q						83/81Q 88/86Q				
	5.00R12LT									83/81P			
13	165/70R13C				88/86T								
	155R13C						85/83Q						
	165R13C				94/93Q								
	175R13C				97/95Q								
14	6.00R13LT										98/93L 10PR		
	165R14LT	96/95R 8PR											
	175/65R14C				90/88T								
	165/70R14C				89/87R 6PR								
15	175/70R14C				95/93T								
	175/70R14LT				95/93S								
	175/75R14LT	99/96S 10PR											
	185/75R14												
16	195/75R14												
	175R14C		99/98Q		99/98Q								
	185R14C	102/100R 8PR	102/100R 8PR	102/100Q									
	185R14LT			102/100Q									
17	195R14C	106/104R 8PR	106/104R 8PR	106/104Q									
	205R14C				112/110P 8PR		105/103Q						
	6.00R14LT										100/95L 10PR		
18	205/65R15C				102/100T								
	215/65R15C				104/102T								
	195/70R15C				104/102N 8PR								
	205/70R15C				106/104R 8PR								
19	215/70R15C				109/107R 8PR								
	225/70R15C				112/110R 8PR								
	225/75R15C	*116/114Q 8PR											
	235/75R15							105S					
20	LT235/75R15					104/101Q							
	185R15C				103/102R 8PR								
	195R15C	106/104R 8PR	106/104R 8PR	106/104Q									
	30X10.50R15LT						109Q						
21	6.00R15LT										101/97L 10PR		
	6.50R15LT										101/97Q 106/101Q		
	7.00R15LT										109/105Q		109/105L 10PR
22	195/60R16C				99/97T								
	215/60R16C				103/101T								
	195/65R16C				104/102 R 8PR								
	205/65R16C				107/105T								
23	215/65R16C				109/107R 8PR								
	225/65R16C				112/110R 8PR								
	235/65R16C				115/113R 8PR								
	175/75R16C				101/99Q								
24	185/75R16C				104/102R 8PR								
	195/75R16C				107/105R 8PR								
	205/75R16C				110/108Q 8PR								
	215/75R16C				113/111Q 8PR								
25	225/75R16C				121/120R 10PR								
	205/80R16				104S XL								
	215/80R16					107S XL							
	175R16C				98/96Q 6PR				98/96Q 6PR				
26	205R16C				110/108S 8PR								
	6.50R16LT										107/102Q 10PR		
	7.00R16LT										111/107Q 10PR	111/107N 10PR	

Notes: * under development

Trailer Size & Pattern Matrix

Rim Diameter	Aspect Ratio	Size	ST01
13	80	ST175/80R13	*97/93L 8PR
14	75	ST205/75R14	105/101M 8PR
		ST215/75R14	108/103L 8PR
15	75	ST205/75R15	101/97M 6PR
		ST205/75R15	107/102M 8PR
		ST225/75R15	117/112M 10PR
		ST225/75R15	113/108M 8PR
16	80	ST235/80R16	124/120M 10PR
	85	ST235/85R16	*125/121M 10PR

All season Size & Pattern Matrix

Rim Diameter	Aspect Ratio	Size	SP-401
13	70	155/70R13	75T
		165/70R13	79T
		175/70R13	82T
	80	155/80R13	79T
		185/55R14	80H
		165/60R14	79H XL
14	60	185/60R14	82H
		155/65R14	*75T
		175/65R14	86H XL
	65	165/65R14	*79H
		185/65R14	86H
		165/70R14	81T
	70	195/50R15	86W XL
		195/55R15	89V XL
		185/55R15	86V XL
15	55	185/60R15	88H XL
		195/60R15	88H
		175/65R15	88H XL
	65	185/65R15	88H
		195/65R15	95V XL
		205/45R16	*83W
16	45	195/55R16	91V XL
		215/55R16	*97V XL
		205/55R16	91H
	55	225/55R16	99V XL
		205/60R16	96V XL
		215/60R16	99V XL
	60	215/65R16	98H
		215/45R17	91W XL
17	45	225/45R17	94V XL
		235/45R17	*97W XL
		205/50R17	*93W XL
	50	225/50R17	*98V XL
		235/55R17	*103W XL
		215/60R17	*100V XL
	65	225/65R17	*106V XL
		225/40R18	92W XL
18	40	225/55R18	*102V XL
21	40	295/40R21	111V XL

Winter Size & Pattern matrix

Rim Diameter	Aspect Ratio	Size	SP-901	SP-902
12	70	145/70R12		69S
		155R12C		88/86Q
	65	155/65R13		73T
		165/65R13		77S
		145/70R13		71T
13	70	155/70R13		75T
		165/70R13		79T
		165/70R13C		88/86Q
	80	175/70R13		86T
		145/80R13		75T
		155/80R13		79T
		155R13C		90/88Q
		165R13C		94/93Q
		6.00R13LT		98/93Q
14	55	185/55R14	*80H	
		165/60R14	75T	
		185/60R14	86H	
	60	195/60R14	86S	

Notes: * under development

Winter size & Pattern matrix

Rim Diameter	Aspect Ratio	Size	SP-901	SP-902
14	65	155/65R14	75T	
		165/65R14	79T	
		175/65R14	86T	
		175/65R14C		
	70	185/65R14	86T	90/88T
		165/70R14	85T	
		165/70R14C		
		175/70R14	88T	89/87R 6PR
	80	175/70R14C		
		185/70R14	88T	95/93Q
		175/80R14	88T	
		175R14C		
15	50	185R14C		99/98Q
		195R14C		102/100Q
		6.00R14LT		106/104Q
	55	195/50R15	82H	99/95Q
		175/55R15	77T	
		185/55R15	86H	
		195/55R15	85H	
	60	185/60R15	88T	
		195/60R15	88H	
		165/65R15	81T	
		175/65R15	88T	
16	65	185/65R15	88H	
		195/65R15	91H	
		205/65R15	94H	
		205/65R15C		102/100T
	70	195/70R15C		104/102Q
		205/70R15	96T	
		205/70R15C		106/104R 8PR
		215/70R15C		109/107R 8PR
	75	225/70R15C		112/110Q
		215/75R15LT		106/103S
		235/75R15	109T	
		6.00R15LT		101/97Q
16	45	195/45R16	84H	
		205/45R16	*87V	
		195/50R16	*88V	
		205/50R16	*91V	
	50	195/55R16	87H	
		205/55R16	91H/94H	
		215/55R16	97H	
		215/55R17	98V	
	55	225/55R16	99V	
		195/60R16C		99/97T
		205/60R16	92H/96H	
		215/60R16	91H	
16	60	215/60R16C		103/101T
		225/60R16	102H	
		235/60R16	100H	
		195/65R16C		104/102 (100) T
	65	205/65R16C		107/105 (103) T
		215/65R16	98H	
		215/65R16C		109/107 (106) RT 8PR
		225/65R16C		112/110R 8PR
	70	235/65R16C		115/113R 8PR
		215/70R16	100T	
		225/70R16	103H	
		235/70R16	106T	
16	75	245/70R16	107T	
		265/70R16	112T	
		185/75R16C		104/102R 8PR
		195/75R16C		107/105R 8PR
		205/75R16C		110/108Q
		215/75R16C		116/114N
		225/75R16C		121/120R 10PR
		245/75R16LT		120/116Q

Winter size & Pattern matrix

Rim Diameter	Aspect Ratio	Size	SP-901	SP-902
16		6.50R16LT		107/102Q
		7.00R16LT		115/110Q
17	40	205/40R17	*84V	
		215/40R17	*87V	
	45	205/45R17	88V	
		215/45R17	91V	
		225/45R17	94V	
		235/45R17	97V	
		245/45R17	*99V	
	50	205/50R17	93V	
		215/50R17	91H	
		225/50R17	98V	
	55	205/55R17	95H	
		215/55R17	94H	
		225/55R17	101V	
		235/55R17	103V	
	60	195/60R16	89H	
		215/60R17	96H	
		225/60R17	99H	
		235/60R17	102V	
	65	225/65R17	102H	
		235/65R17	104V/108V	
		245/65R17	111H	
		265/65R17	116H	
	70	265/70R17LT		121/118Q
18	40	225/40R18	92V	
		235/40R18	*95V	
		245/40R18	97V	
		255/40R18	99H	
	45	225/45R18	*95W	
		235/45R18	*98V	
		245/45R18	100V	
	50	225/50R18	*99V	
		235/50R18	101V	
	55	215/55R18	95H	
		225/55R18	102V	
		235/55R18	104V	
		255/55R18	109V	
	60	225/60R18	100H	
		235/60R18	107V	
		265/60R18	114H	
19	35	225/35R19	*88W	
		235/35R19	*91W	
	40	245/40R19	*98W	
	45	255/45R19	104V	
	50	235/50R19	103V	
		255/50R19	107V	
	55	235/55R19	105V	
20	40	275/40R20	*106W	
	45	275/45R20	*110W	
21	35	295/35R21	107V	

Notes: * under development

PASSENGER CAR

UHP

SP-701

SP-7

HP

SP-6

SP-601_{SFT}

SP-802

STD

SP-801

CSR72

SP-516

SP-701



EXCELLENT
HANDLING



HIGH
SPEED

UHP

MEDIUM & HIGH GRADE CAR,
SPORTS CAR, SPORTS SUV



Variable pitch tread design reduces noise,
large block design delivers responsive
driving experience.

The asymmetric dynamic block, closed
and gradually decreased lateral grooves
cut into water film easily, and deliver
good ride comfort.

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section Width (mm)	O.D. (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
• 195/55ZR20	95	V	XL	6J	5.5J-7.0J	201	722	690	340	-	-	-	-
205/45ZR17	88	W	XL	7.0J	6.5J-7.5J	206	616	560	340	C	C	72	»
205/50ZR17	93	W	XL	6.5J	5.5J-7.5J	214	638	650	340	C	C	72	»
205/55ZR17	95	W	XL	6.5J	5.5J-7.5J	214	658	690	340	C	C	72	»
215/35ZR18	84	W	XL	7.5J	7.0J-8.5J	218	607	500	340	C	C	72	»
215/45ZR17	91	Y	XL	7.0J	7.0J-8.0J	213	626	615	340	C	C	72	»
215/45ZR18	93	W	XL	7.0J	7.0J-8.0J	213	626	650	340	C	C	71	»
215/50ZR17	95	W	XL	7.0J	6.0J-7.5J	226	648	690	340	C	C	72	»
215/55R16	97	V	XL	7.0J	6.0J-7.5J	226	642	730	340	C	C	72	»
215/55ZR17	98	Y	XL	7.0J	6.0J-7.5J	226	668	750	340	C	C	72	»
225/35ZR19	88	Y	XL	8.0J	7.5J-9.0J	232	586	560	340	C	C	72	»
225/40ZR18	92	Y	XL	8.0J	7.5J-9.0J	230	637	630	340	C	C	72	»
225/40ZR19	93	Y	XL	8.0J	7.5J-9.0J	230	663	650	340	C	C	72	»
225/45ZR17	94	Y	XL	7.5J	7.0J-8.5J	225	634	670	340	C	C	72	»
225/45ZR18	91	W	XL	7.5J	7.0J-8.5J	225	659	615	350	C	C	71	»
• 225/45ZR19	96	Y	XL	7.5J	7.0J-8.5J	225	685	710	340	-	-	-	-
225/50ZR17	98	Y	XL	7.0J	6.0J-8.0J	233	658	750	340	C	C	72	»
225/55ZR17	97	V	-	7.0J	6.0J-8.0J	233	680	730	300	C	C	71	»
225/55ZR17	101	W	XL	7.0J	6.0J-8.0J	233	680	825	340	C	C	72	»
• 235/30ZR20	88	Y	XL	8.5J	8.0J-9.5J	242	650	560	340	-	-	-	-
235/35ZR19	91	W	XL	8.5J	8.0J-9.5J	241	647	615	340	C	C	72	»
235/40ZR18	95	W	XL	8.5J	8.0J-9.0J	241	645	690	340	C	C	70	»
235/40ZR19	96	Y	XL	8.5J	8.0J-9.5J	236	619	710	340	C	C	72	»
235/45ZR17	97	W	XL	8.0J	7.5J-9.0J	236	644	730	340	C	C	72	»
235/45ZR18	98	W	XL	8.0J	7.5J-9.0J	236	669	750	340	C	C	72	»
245/35ZR19	93	W	XL	8.5J	8.0J-9.5J	248	655	650	340	C	C	72	»
245/35ZR20	95	Y	XL	8.5J	8.0J-9.5J	248	680	690	340	C	C	72	»
• 245/40ZR17	91	Y	-	8.5J	8.0J-9.5J	248	628	615	350	-	-	-	-
245/40ZR17	91	W	-	8.5J	8.0J-9.5J	248	628	615	350	C	C	71	»
245/40ZR18	97	W	XL	8.5J	8.0J-9.5J	248	653	730	340	C	C	72	»
245/40ZR19	98	W	XL	8.5J	8.0J-9.5J	248	679	750	340	C	C	72	»
245/40ZR20	99	Y	XL	8.5J	8.0J-9.5J	248	704	775	340	C	C	72	»
245/45ZR17	99	W	XL	8.0J	7.5J-9.0J	243	652	775	340	C	C	72	»
245/45ZR18	100	W	XL	8.0J	7.5J-9.0J	243	677	800	340	C	C	72	»
• 255/30ZR19	91	Y	XL	9.0J	8.5J-10.0J	260	637	615	340	-	-	-	-
255/35ZR18	94	Y	XL	9.0J	8.5J-10.0J	260	635	670	340	C	C	73	»
255/35ZR19	96	Y	XL	9.0J	8.5J-10.0J	260	661	710	340	C	C	73	»
255/35ZR20	97	Y	XL	9.0J	8.5J-10.0J	260	686	730	340	C	C	73	»
255/40ZR18	99	W	XL	9.0J	8.5J-10.0J	260	661	775	340	C	C	73	»
255/40ZR19	100	Y	XL	9.0J	8.5J-10.0J	260	687	800	340	C	C	73	»
255/45ZR18	103	W	XL	8.5J	8.0J-9.5J	255	687	875	340	C	C	73	»
255/45ZR19	104	W	XL	8.5J	8.0J-9.5J	255	713	900	340	C	C	73	»
265/35ZR18	97	W	XL	9.5J	9.0J-10.5J	271	643	730	340	C	C	73	»
265/35ZR22	102	Y	XL	9.5J	9.0J-10.5J	271	745	850	340	C	C	73	»
275/35ZR18	99	W	XL	9.5J	9.0J-11.0J	278	649	775	340	C	C	73	»
• 275/35ZR19	100	Y	XL	9.5J	9.0J-11.0J	278	675	800	-	-	-	-	-
• 275/35ZR20	102	Y	XL	9.5J	9.0J-11.0J	278	700	850	-	-	-	-	-
275/45ZR20	110	V	XL	9.0J	8.5J-10.5J	273	756	1060	340	C	C	73	»
295/35ZR21	107	Y	XL	10.5J	10.0J-11.5J	301	739	975	340	C	C	70	»

Notes: • under development

SP-701

RF Runonflat technology

MEDIUM & HIGH GRADE CAR



HIGH
SPEED




EXCELLENT
HANDLING




- A new self-supporting reinforced material is added at SW and bead area to "prop up" the car body to continue driving.

- Tire strength and low heat generation performance are improved remarkably by replacing the traditional polyester fiber with modified rayon.

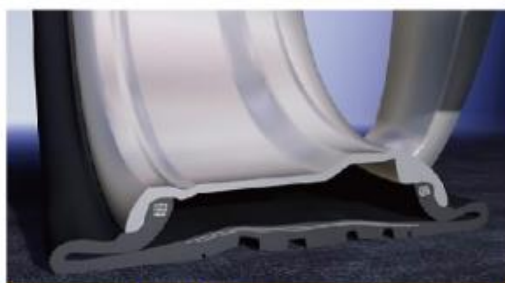

Normal Tire (Air Leakage)

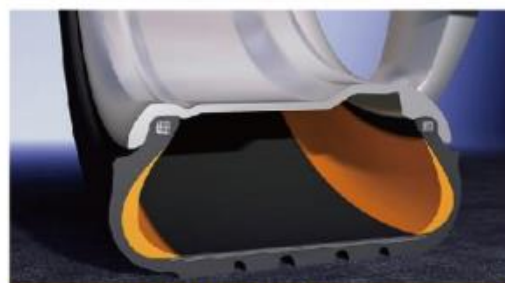

Runflat Tire (Air Leakage)

Run-flat tires (self-supporting tires) must be installed on special rims with TPMS (tire pressure monitoring system).

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section Width (mm)	O.D. (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
225/55ZR17	101	W	XL	7.0J	6.0J-8.0J	233	680	825	340
225/50ZR17	98	W	XL	7.0J	6.0J-8.0J	230	658	750	340
245/50ZR18	104	W	XL	7.5J	7.0J-8.5J	253	703	900	340
245/45ZR18	100	W	XL	8.0J	7.5J-9.0J	243	677	800	340

SP-7

UHP

MEDIUM / HIGH GRADE CAR
AND SPORTS CAR



WET
GRIP



- Special U-shaped directional pattern design assures even stress distribution on pattern block, provides excellent grip ability.
- Maximized shoulder block design provides the tread enough rigidity, excellent handling and sports ability.
- Dense lateral grooves ensure good grip and driving stability in wet conditions.

- Widened central ribs promote steering response and cornering stability.
- 4 wide grooves provide excellent water dispersion and wet grip performance.

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section width (mm)	O.D. (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
205/60R16	92	V	-	6.0J	5.5J-7.5J	209	652	630	300	C	B	71	))
215/60R16	95	V	-	6.5J	6.0J-7.5J	221	664	690	300	C	B	71	))
225/60R16	98	V	-	6.5J	6.0J-8.0J	228	676	750	300	C	B	71	))
185/55R15	82	V	-	6.0J	5.0J-6.5J	194	585	475	300	E	B	70	))
205/55R15	88	V	-	6.5J	5.5J-7.5J	214	607	560	300	E	B	71	))
205/55R16	94	V	XL	6.5J	5.5J-7.5J	214	632	670	340	C	B	72	))
215/55R16	97	W	XL	7.0J	6.0J-7.5J	226	642	730	340	C	B	72	))
215/55R17	94	V	-	7.0J	6.0J-7.5J	226	668	670	300	C	B	71	))
225/55R16	99	W	XL	7.0J	6.0J-8.0J	233	654	775	340	C	B	72	))
195/50R15	82	V	-	6.0J	5.5J-7.0J	201	577	475	300	E	B	71	))
205/50R15	86	V	-	6.5J	5.5J-7.5J	214	587	530	300	E	A	71	))
205/50R17	93	W	XL	6.5J	5.5J-7.5J	214	638	650	340	C	A	72	))
215/50R17	95	W	XL	7.0J	6.0J-7.5J	226	648	690	340	C	A	72	))
225/50R16	96	V	XL	7.0J	6.0J-8.0J	233	632	710	340	C	A	72	))
225/50R17	98	W	XL	7.0J	6.0J-8.0J	233	658	750	340	C	A	72	))
235/50R17	96	W	-	7.5J	6.5J-8.5J	245	668	710	350	C	A	71	))
195/45R15	78	V	-	6.5J	6.0J-7.5J	195	557	425	300	E	A	71	))
195/45R16	80	V	-	6.5J	6.0J-7.5J	195	582	450	300	E	A	71	))
205/45R16	87	W	XL	7.0J	6.5J-7.5J	206	590	545	340	E	A	72	))
215/45R17	91	Y	XL	7.0J	7.0J-8.0J	213	626	615	340	C	A	72	))
225/45R17	94	W	XL	7.5J	7.0J-8.5J	225	634	670	340	C	A	72	))
205/40R17	84	W	XL	7.5J	7.0J-8.0J	212	596	500	340	E	A	72	))
215/40R17	87	W	XL	7.5J	7.0J-8.5J	218	604	545	340	E	A	72	))
225/40R18	92	Y	XL	8.0J	7.5J-9.0J	230	637	630	340	C	A	72	))

SP-6

HP

MEDIUM & HIGH GRADE CAR



QUIET



COMFORT



- Widened shoulder pattern design improves crown rigidity, ensures a comfortable ride and gives consideration to the sports ability.
- Optimized 5-pitch tread design effectively reduce tire noise during travel.

- The pattern blocks in the center, on both sides and on the shoulder of the tire are divided into many short discontinuous units by sipes, which effectively diverts the noise generated in the process of driving.

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
175/65R14	82	H	-	5.0J	5.0J - 6.0J	177	584	475	300	E	B	70	))
175/70R14	84	H	-	5.0J	4.5J - 6.0J	177	602	500	300	E	B	70	))
185/60R15	84	H	-	5.5J	5.0J - 6.5J	189	603	500	300	E	B	70	))
185/65R14	86	H	-	5.5J	5.0J - 6.5J	189	596	530	300	E	B	70	))
185/65R15	88	H	-	5.5J	5.0J - 6.5J	189	621	560	300	E	B	70	))
195/50R16	88	V	-	6.0J	5.5J - 7.0J	201	602	560	340	E	B	72	))
195/55R15	85	V	-	6.0J	5.5J - 7.0J	201	595	515	300	E	B	71	))
195/55R16	87	V	-	6.0J	5.5J - 7.0J	201	620	545	300	E	B	71	))
195/60R15	88	V	XL	6.0J	5.5J - 7.0J	201	615	560	300	E	B	71	))
195/60R16	89	H	-	6.0J	5.5J - 7.0J	201	640	580	300	E	B	71	))
195/65R15	91	V	-	6.0J	5.5J - 7.0J	201	635	615	300	E	B	71	))
195/70R15	97	T	XL	6.0J	5.0J-6.5J	201	655	730	340	E	B	72	))
205/50R16	91	V	XL	6.5J	5.5J - 7.5J	214	612	615	340	E	B	72	))
205/55R16	91	V	-	6.5J	5.5J - 7.5J	214	632	615	300	E	B	71	))
205/60R15	91	V	-	6.0J	5.5J - 7.5J	209	627	615	300	E	B	71	))
205/60R16	96	V	XL	6.0J	5.5J - 7.5J	209	652	710	340	C	B	72	))
205/65R15	94	V	-	6.0J	5.5J - 7.5J	209	647	670	300	E	B	71	))
205/65R16	95	H	-	6.0J	5.5J - 7.5J	209	672	690	300	C	B	71	))
215/60R16	99	H	XL	6.5J	6.0J - 7.5J	221	664	775	340	C	B	71	))
215/65R15	100	H	XL	6.5J	6.0J - 7.5J	221	661	800	340	C	B	72	))
215/70R15	98	H	-	6.5J	5.5J - 7.0J	221	683	750	300	C	B	71	))

SP-601 SFT

MEDIUM & HIGH GRADE CAR, CUV, MULTI-PURPOSE VAN



COMFORT



QUIET



WET GRIP



- Multi-sipes design offers excellent grip.
- Middle special designed pattern block balances high speed driving performance and wet grip.
- The semi-closed design of shoulder reduces the rolling resistance while effectively reducing noise.

- Multi-sipe design further improves water dispersion and wet grip.
- Computer designed multi - pitch pattern effectively reduces tire noise.
- Special sipe design adjusts tire toughness and improves riding comfort.

Size	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
165/70R13	79	T	5.00B	4.00B-5.5J	170	562	437	300
175/70R12	80	H	5.00B	4.50B-5.50B	177	551	450	300
175/70R13	82	T	5.00B	4.50B-6.0J	177	576	475	300
185/65R14	86	H	5.5J	5.0J-6.5J	189	596	530	300
185/70R13	86	T	5.50B	4.50B-6.0J	189	590	530	300
185/70R14	88	H	5.5J	4.50J-6.0J	189	616	560	300
195/60R15	88	H	6.0J	5.5J-7.0J	201	615	560	300
195/65R15	91	H	6.0J	5.5J-7.0J	201	635	615	300
205/65R15	94	H	6.0J	5.5J-7.5J	209	647	670	300
205/70R14	95	T	6.0J	5.0J-7.0J	209	644	690	300

SP-6

HP

MEDIUM & HIGH GRADE CAR



QUIET



COMFORT



- Widened shoulder pattern design improves crown rigidity, ensures a comfortable ride and gives consideration to the sports ability.
- Optimized 5-pitch tread design effectively reduce tire noise during travel.

- The pattern blocks in the center, on both sides and on the shoulder of the tire are divided into many short discontinuous units by sipes, which effectively diverts the noise generated in the process of driving.

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section width (mm)	O.D. (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
175/65R14	82	H	-	5.0J	5.0J - 6.0J	177	584	475	300	E	B	70	))
175/70R14	84	H	-	5.0J	4.5J - 6.0J	177	602	500	300	E	B	70	))
185/60R15	84	H	-	5.5J	5.0J - 6.5J	189	603	500	300	E	B	70	))
185/65R14	86	H	-	5.5J	5.0J - 6.5J	189	596	530	300	E	B	70	))
185/65R15	88	H	-	5.5J	5.0J - 6.5J	189	621	560	300	E	B	70	))
195/50R16	88	V	-	6.0J	5.5J - 7.0J	201	602	560	340	E	B	72	))
195/55R15	85	V	-	6.0J	5.5J - 7.0J	201	595	515	300	E	B	71	))
195/55R16	87	V	-	6.0J	5.5J - 7.0J	201	620	545	300	E	B	71	))
195/60R15	88	V	XL	6.0J	5.5J - 7.0J	201	615	560	300	E	B	71	))
195/60R16	89	H	-	6.0J	5.5J - 7.0J	201	640	580	300	E	B	71	))
195/65R15	91	V	-	6.0J	5.5J - 7.0J	201	635	615	300	E	B	71	))
195/70R15	97	T	XL	6.0J	5.0J-6.5J	201	655	730	340	E	B	72	))
205/50R16	91	V	XL	6.5J	5.5J - 7.5J	214	612	615	340	E	B	72	))
205/55R16	91	V	-	6.5J	5.5J - 7.5J	214	632	615	300	E	B	71	))
205/60R15	91	V	-	6.0J	5.5J - 7.5J	209	627	615	300	E	B	71	))
205/60R16	96	V	XL	6.0J	5.5J - 7.5J	209	652	710	340	C	B	72	))
205/65R15	94	V	-	6.0J	5.5J - 7.5J	209	647	670	300	E	B	71	))
205/65R16	95	H	-	6.0J	5.5J - 7.5J	209	672	690	300	C	B	71	))
215/60R16	99	H	XL	6.5J	6.0J - 7.5J	221	664	775	340	C	B	71	))
215/65R15	100	H	XL	6.5J	6.0J - 7.5J	221	661	800	340	C	B	72	))
215/70R15	98	H	-	6.5J	5.5J - 7.0J	221	683	750	300	C	B	71	))

SP-601 SFT

MEDIUM & HIGH GRADE CAR, CUV, MULTI-PURPOSE VAN



COMFORT



QUIET



WET GRIP



- Multi-sipes design offers excellent grip.
- Middle special designed pattern block balances high speed driving performance and wet grip.
- The semi-closed design of shoulder reduces the rolling resistance while effectively reducing noise.

- Multi-sipe design further improves water dispersion and wet grip.
- Computer designed multi - pitch pattern effectively reduces tire noise.
- Special sipe design adjusts tire toughness and improves riding comfort.

Size	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D. (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
165/70R13	79	T	5.00B	4.00B-5.5J	170	562	437	300
175/70R12	80	H	5.00B	4.50B-5.50B	177	551	450	300
175/70R13	82	T	5.00B	4.50B-6.0J	177	576	475	300
185/65R14	86	H	5.5J	5.0J-6.5J	189	596	530	300
185/70R13	86	T	5.50B	4.50B-6.0J	189	590	530	300
185/70R14	88	H	5.5J	4.50J-6.0J	189	616	560	300
195/60R15	88	H	6.0J	5.5J-7.0J	201	615	560	300
195/65R15	91	H	6.0J	5.5J-7.0J	201	635	615	300
205/65R15	94	H	6.0J	5.5J-7.5J	209	647	670	300
205/70R14	95	T	6.0J	5.0J-7.0J	209	644	690	300

SP-802



QUIET



WET
GRIP

CAR



Scientific sipes design fine tunes rigidity of the tire and improves ride comfort.

Semi-closed shoulder helps break resonance and reduce noise.

Specially designed sipe tails fasten water dispersion and bring better wet grip.

Massive tread blocks combined with specially designed sipes give the tire good grip and traction.

Revolutionized tread compound with nano-class silica gives the tire low rolling resistance, thus low heat.

SSBR enhanced compound improves wet grip further.

Size	LI	SS	Load Type	Measure Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
165/60R14	75	H	-	5.0J	170	554	387	300
175/60R14	79	V	-	5.0J	177	566	437	300
175/65R14	82	H	-	5.0J	177	584	475	300
175/65R15	84	V	-	5.0J	177	609	500	300
175/70R14	84	H	-	5.0J	177	602	500	300
185/55R15	82	V	-	6.0J	194	585	475	300
185/60R14	82	H	-	5.5J	189	578	475	300
185/60R15	84	H	-	5.5J	189	603	500	300
185/65R14	86	H	-	5.5J	189	596	530	300
185/65R15	88	H	-	5.5J	189	621	560	300
195/50R15	82	V	-	6.0J	201	577	475	300
195/50R16	88	V	XL	6.0J	201	602	560	340
195/55R15	85	V	-	6.0J	201	595	515	300
195/55R16	87	V	-	6.0J	201	620	545	300
195/60R15	88	H	-	6.0J	201	615	560	300
195/60R16	89	H	-	6.0J	201	640	580	300
195/65R15	91	H	-	6.0J	201	635	615	300
205/50R16	87	V	-	6.5J	214	612	615	340
205/50R17	93	V	XL	6.5J	214	638	650	340
205/55R16	91	V	-	6.5J	214	632	615	300
205/60R16	92	V	-	6.0J	209	652	630	300
205/65R15	94	H	-	6.0J	209	647	670	300
205/65R16	95	V	-	6.0J	209	672	690	300
215/50R17	91	V	-	7.0J	226	648	690	340
215/55R16	93	V	-	7.0J	226	642	730	340
215/55R17	94	V	-	7.0J	226	668	670	300
215/60R16	95	V	-	6.5J	221	664	690	300
225/50R17	94	V	-	7.0J	233	658	750	340
225/55R16	95	V	-	7.0J	233	654	690	300
225/55R17	101	V	XL	7.0J	233	680	825	340
225/60R16	98	V	-	6.5J	228	676	750	300

SP-801

ORDINARY FAMILY CAR TIRES

FUEL
ECONOMY

COMFORT



- Balance of mileage and oil efficiency performance, perfect economy and eco-friendly.

- Newly designed tread compound reduces energy loss, heat generation and rolling resistance.

- Wear resistant tread compound and optimized tread groove design provide longer tire mileage.

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
145/70R13	71	T	-	4.50B	3.50B-5.0J	150	534	345	300	E	C	70	))
145/80R13	75	T	-	4.00B	3.50B-5.0J	145	562	387	300	E	C	70	))
155/65R13	73	T	-	4.5J	4.5J-5.5J	157	532	365	300	E	C	70	))
155/65R14	75	T	-	4.5J	4.5J-5.5J	157	558	387	300	E	C	70	))
155/70R12	73	T	-	4.50B	4.00B-5.00B	157	523	365	300	E	C	70	))
155/70R13	75	T	-	4.5J	4.0J-5.0J	157	548	387	300	E	C	70	))
155/70R14	77	T	-	4.50B	4.00B-5.0J	157	574	412	300	E	C	70	))
155/80R13	79	T	-	4.5J	4.0J-5.0J	157	578	437	300	E	C	70	))
165/60R14	75	H	-	5.0J	4.5J-6.0J	170	554	387	300	E	C	70	))
165/65R13	77	T	-	5.0J	4.5J-6.0J	170	544	412	300	E	C	70	))
165/65R14	79	T	-	5.0J	4.5J-6.0J	170	570	437	300	E	C	70	))
165/65R15	81	H	-	5.0J	4.5J-6.0J	170	595	462	300	E	C	70	))
165/70R12	77	T	-	5.00B	4.00B-5.50B	170	537	412	300	E	C	70	))
165/70R13	79	T	-	5.0J	4.0J-5.5J	170	562	437	300	E	C	70	))
165/70R14	81	T	-	5.0J	4.0J-5.5J	170	588	462	300	E	C	70	))
165/80R13	83	T	-	4.5J	4.0J-5.5J	165	594	487	300	E	C	70	))
175/55R15	77	H	-	5.5J	5.0J-6.0J	182	573	412	300	E	C	70	))
175/60R13	77	T	-	5.0J	5.0J-6.0J	177	540	412	300	E	C	70	))
175/60R15	81	Q	-	5.0J	5.0J-6.0J	177	591	462	300	E	C	70	))
175/60R15	81	H	-	5.0J	5.0J-6.0J	177	591	462	300	E	C	70	))
175/65R13	80	T	-	5.0J	5.0J-6.0J	177	558	450	300	E	C	70	))
175/65R14	82	T	-	5.0J	5.0J-6.0J	177	584	475	300	E	C	70	))
175/65R14	86	H	XL	5.0J	5.0J-6.0J	177	584	530	340	E	C	71	))
175/65R15	84	H	-	5.0J	5.0J-5.5J	177	609	500	300	E	C	70	))
175/70R12	80	H	-	5.0B	4.5B-5.5B	177	551	450	300	E	C	70	))
175/70R13	82	T	-	5.0J	4.5J-6.0J	177	576	475	300	-	-	-	-
SFT													
175/70R13	82	T	-	5.0J	4.5J-6.0J	177	576	475	300	E	C	70	))
175/70R14	84	T	-	5.0J	4.5J-6.0J	177	602	500	300	E	C	70	))
175/80R14	88	T	-	5.0J	4.5J-6.0J	177	636	560	300	E	C	70	))
185/55R14	80	H	-	6.0J	5.0J-6.5J	194	560	450	300	E	C	70	))
185/55R15	82	H	-	6.0J	5.0J-6.5J	194	585	475	300	E	C	70	))
185/60R14	82	H	-	5.5J	5.0J-6.5J	189	578	475	300	E	C	70	))
185/60R15	84	H	-	5.5J	5.0J-6.5J	189	603	500	300	E	C	70	))
185/65R14	86	H	-	5.5J	5.0J-6.5J	189	596	530	300	E	C	70	))
185/65R15	88	H	-	5.5J	5.0J-6.5J	189	621	560	300	E	C	70	))
185/70R13	86	T	-	5.5J	4.5J-6.0J	189	590	530	300	-	-	-	-
SFT													
185/70R13	86	T	-	5.5J	4.5J-6.0J	189	590	530	300	E	C	70	))
185/70R14	88	H	-	5.5J	4.5J-6.0J	189	616	560	300	E	C	70	))
185/70R14	92	H	XL	5.5J	4.5J-6.0J	189	616	630	340	E	C	71	))
185/80R14	91	T	-	5.0J	4.5J-5.5J	184	652	615	300	E	C	70	))
195/50R15	82	H	-	6.0J	5.5J-7.0J	201	577	475	300	E	C	70	))
195/55R15	85	H	-	6.0J	5.5J-7.0J	201	595	515	300	E	C	70	))
195/60R14	86	H	-	6.0J	5.5J-7.0J	201	590	530	300	E	C	70	))
195/60R15	88	H	-	6.0J	5.5J-7.0J	201	615	560	300	E	C	70	))
195/65R15	91	H	-	6.0J	5.5J-7.0J	201	635	615	300	E	C	70	))
195/65R15	95	H	XL	6.0J	5.5J-7.0J	201	635	690	340	E	C	70	))
195/70R14	91	H	-	6.0J	5.0J-6.5J	201	630	615	300	E	C	70	))
195/70R14	95	H	XL	6.0J	5.0J-6.5J	201	630	690	340	E	C	70	))
205/55R16	91	H	-	6.5J	5.5J-7.5J	214	632	615	300	E	C	71	))
205/55R16	94	V	XL	6.5J	5.5J-7.5J	214	632	670	340	E	C	71	))
205/60R15	91	H	-	6.0J	5.5J-7.5J	209	627	615	300	E	C	70	))
205/65R15	94	H	-	6.0J	5.5J-7.5J	209	647	670	300	E	C	70	))
205/70R15	96	H	-	6.0J	5.0J-7.0J	209	669	710	300	E	C	70	))
205/70R15	100	S	XL	6.0J	5.0J-7.0J	209	669	800	340	-	-	-	-

CSR72

ORDINARY FAMILY CAR TIRE

FUEL
ECONOMY

Size	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
145/70R12	69	Q/S	4.50B	4.00B, 5.00B	150	509	325	250

SP-516

TAXI

WEAR
RESISTANCE

COMFORT



- Special tread compound: Nanoscale carbon black provides better tread wear resistance than ordinary rubber.

- Massive central ribs with lower void ratio ensure the rigidity of tread and improve tire service life.

- Tire shoulder with straight tire-bar and special groove design avoids irregular wear, improves cornering handling.

- Belts covered with nylon ply improve puncture resistance and separation resistance.

- Thicker side wall design.

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
175/70R14	84	H	-	5.0J	4.5J-6.0J	177	602	500	300	E	B	70	))
185/65R15	88	H	-	5.5J	5.0J-6.5J	189	621	560	300	E	B	70	))
195/65R15	91	H	-	6.0J	5.5J-7.0J	201	635	615	300	E	B	71	))
205/65R15	94	H	-	6.0J	5.5J-7.5J	209	647	670	300	E	B	71	))
185/60R14	82	H	-	5.5J	5.0J-6.5J	189	578	475	300	E	B	70	))
185/60R15	84	H	-	5.5J	5.0J-6.5J	189	603	500	300	E	B	70	))
195/60R14	86	H	-	6.0J	5.5J-7.0J	201	590	530	300	E	B	71	))
195/60R15	88	H	-	6.0J	5.5J-7.0J	201	615	560	300	E	B	71	))
195/55R15	89	H	XL	6.0J	5.5J-7.0J	201	595	580	340	E	B	72	))
205/55R16	91	H	-	6.5J	5.5J-7.5J	214	632	615	300	E	B	70	))
205/55R16	91	V	-	6.5J	5.5J-7.5J	214	632	615	300	E	B	71	))

SUV&4X4



H/P

SP-303

H/T

SP-301(★)

A/T

SP-302

SP-306

M/T

MASPIRE M/T

SP-303



EXCELLENT
HANDLING



COMFORTABLE
WITH LOW NOISE



ANTI-
HYDROPLANING

SUV



Asymmetric pattern enhances cornering stability and responsiveness.

Four main grooves with lateral wide sipes, offer excellent water dispersion performance.

Optimized pitch alignment with advanced simulation system delivers lower tire noise.

Four main grooves with lateral wide sipes, offer excellent water dispersion performance.

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
215/55R18	99	V	XL	7.0J	6.0J-7.5J	226	693	775	340	C	C	72	»
215/60R17	96	H	-	6.5J	6.0J-7.5J	221	690	710	300	C	C	71	»
• 215/65R16	100	V	-	6.5J	6.0J-7.5J	221	686	750	300	-	-	-	-
• 225/50R18	99	W	XL	7.0J	6.5J-7.5J	233	683	690	300	-	-	-	-
• 225/55R18	98	W	-	7.0J	6.0J-8.0J	233	705	750	350	C	C	71	»
• 225/55R19	105	W	XL	7.0J	6.5J-7.5J	233	731	775	300	-	-	-	-
225/60R17	99	V	-	6.5J	6.0J-8.0J	228	702	775	300	C	C	71	»
225/60R18	100	V	-	6.5J	6.0J-8.0J	228	727	800	300	C	C	71	»
225/65R17	102	T	-	6.5J	6.0J-8.0J	228	724	850	300	C	C	71	»
225/70R15	100	H	-	6.5J	6.0J-7.5J	228	697	800	300	C	C	71	»
225/70R16	103	T	-	6.5J	6.0J-7.5J	228	722	875	300	C	C	71	»
235/50R18	101	W	XL	7.5J	6.5J-8.5J	245	693	825	340	C	C	72	»
235/50R19	103	W	XL	7.5J	6.5J-8.5J	245	719	875	340	C	C	72	»
235/55R17	99	H	-	7.5J	6.5J-8.5J	245	690	775	300	C	C	71	»
235/55R18	104	V	XL	7.5J	6.5J-8.5J	245	715	900	340	C	C	72	»
235/55R19	105	W	XL	7.5J	6.5J-8.5J	245	741	925	340	C	C	72	»
235/60R16	100	T	-	7.0J	6.5J-8.5J	240	688	800	300	C	C	71	»
235/60R17	102	V	-	7.0J	6.5J-8.5J	240	714	850	300	C	C	71	»
235/60R18	107	V	XL	7.0J	6.5J-8.5J	240	739	975	340	C	C	72	»
235/65R17	108	V	XL	7.0J	6.5J-8.5J	240	738	1000	340	C	C	72	»
235/65R18	110	H	XL	7.0J	6.5J-8.5J	240	763	1060	340	C	C	72	»
235/70R16	106	H	-	7.0J	6.0J-8.0J	240	736	950	300	C	C	71	»
• 245/45R19	102	Y	XL	8.0J	7.5J-9.0J	243	703	850	340	-	-	-	-
245/55R19	103	W	-	7.5J	7.0J-8.5J	253	753	875	350	C	C	71	»
245/60R18	109	V	XL	7.0J	7.0J-8.5J	248	751	1030	340	C	C	72	»
245/65R17	111	H	XL	7.0J	7.0J-8.5J	248	750	1090	340	C	C	72	»
245/70R16	107	T	-	7.0J	6.5J-8.0J	248	750	975	300	C	C	71	»
255/50R19	107	V	XL	8.0J	7.0J-9.0J	265	739	975	340	C	C	73	»
• 255/50R20	109	Y	XL	8.0J	7.0J-9.0J	265	764	1030	340	-	-	-	-
255/55R18	109	V	XL	8.0J	7.0J-9.0J	265	737	1030	340	C	C	73	»
255/55R19	111	V	XL	8.0J	7.0J-9.0J	265	763	1090	340	C	C	73	»
255/60R17	106	H	-	7.5J	7.0J-9.0J	260	738	950	300	C	C	72	»
255/60R18	112	V	XL	7.5J	7.0J-9.0J	260	763	1120	340	C	C	73	»
255/70R16	111	T	-	7.5J	6.5J-8.5J	260	764	1090	300	C	C	72	»
265/60R18	110	H	-	8.0J	7.5J-9.5J	272	775	1060	300	C	C	72	»
265/65R17	112	H	-	8.0J	7.5J-9.5J	272	776	1120	300	C	C	72	»
265/70R17	115	T	-	8.0J	7.0J-9.0J	272	804	1215	300	C	C	72	»
275/40R20	106	V	XL	9.5J	9.0J-11.0J	278	728	950	340	C	C	73	»
• 275/40R21	107	Y	XL	9.5J	9.0J-10.0J	278	753	975	300	-	-	-	-
• 285/35R21	105	Y	XL	10.0J	9.5J-10.5J	290	733	925	300	-	-	-	-
285/45R19	111	V	XL	9.5J	9.0J-10.5J	285	739	1090	340	C	C	72	»
• 315/35R20	110	Y	XL	11.0J	10.5J-11.5J	320	728	1060	340	-	-	-	-
• 325/30R21	108	Y	XL	11.5J	11.0J-12.0J	331	729	1000	300	-	-	-	-

Notes: • under development

SP-301(★)

SUV

EXCELLENT
HANDLINGCOMFORTABLE
WITH LOW NOISEANTI-
HYDROPLANING

- Optimized lug and sipes design provides excellent grip, thus makes the traveling comfort with lower noise and better traction.

- Optimized lug groove, provides excellent grip on wet road with good self-cleaning performance.

- Computer optimized crisscross pattern provides better water dispersion in wet conditions.

Pattern	Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
SP-301	215/70R16	100	H	-	6.5J	5.5J-7.0J	221	708	800	300	C	C	71	))
SP-301	225/60R17	99	H	-	6.5J	6.0J-7.0J	228	702	775	300	C	C	71	))
SP-301	225/75R15	102	T	-	6.0J	6.0J-7.5J	223	719	850	300	C	C	71	))
SP-301*	215/60R17	96	H	-	6.5J	6.0J-7.5J	221	690	710	300	C	C	71	))
SP-301*	215/65R16	102	H	XL	6.5J	6.0J-7.0J	221	686	850	340	C	C	72	))
SP-301*	225/55R17	101	H	XL	7.0J	6.0J-8.0J	233	680	825	340	C	C	72	))

SP-302

SUV

OFF ROAD
TRACTIONRELIABLE
SAFETY

- Discontinuous tread pattern easily breaks into sand and mud, and brings excellent off road traction.

- 3D structure design of the shoulder provides tenacious traction even on muddy road.

- Stronger and reasonably transitioned shoulder ensures stable cornering.

- Optimized tread depth combined with high wear resistant tread compound brings ultra high mileage.

- Connected pattern provides better water dispersion in wet condition, and superb self-cleaning.

- Larger footprint reduces pressure all across the tread, minimizes crown injury, and increases tread life.

Size	PR	LI	SS	Load Type	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
205/70R15	-	96	H	-	6.0J	5.0J-7.0J	209	669	710	300	E	C	71	))
205R16C	8PR	110/108	S	-	6.0J	5.5J-6.5J	208	736	1060	450	C	B	73	))
215/70R15	-	98	T	-	6.5J	5.5J-7.0J	221	683	750	300	E	C	71	))
215/70R15LT	8PR	104/101	R	-	6.5J	5.5J-7.0J	221	683	900	450	C	B	73	))
215/70R16	-	100	H	-	6.5J	5.5J-7.0J	221	708	800	300	E	C	71	))
215/75R15	-	100	T	-	6.0J	5.5J-6.5J	216	703	800	300	E	C	71	))
225/60R17	-	99	H	-	6.5J	6.0J-8.0J	228	702	775	300	E	C	71	))
225/65R17	-	102	H	-	6.5J	6.0J-8.0J	228	724	850	300	E	C	71	))
225/70R16	-	103	T	-	6.5J	6.0J-7.5J	228	722	875	300	E	C	71	))
225/75R16	-	108	T	XL	6.0J	6.0J-7.5J	223	744	1000	340	E	C	72	))
225/75R16LT	10PR	115/112	Q	-	6.0J	6.0J-7.0J	223	744	1215	550	C	B	73	))
235/60R17	-	102	T	-	7.0J	6.5J-8.5J	240	714	850	300	E	C	71	))
235/65R17	-	108	T	XL	7.0J	6.5J-8.5J	240	738	1000	340	E	C	72	))
235/70R16	-	106	T	-	7.0J	6.5J-7.5J	240	736	950	300	E	C	71	))
235/75R15	-	109	S	XL	6.5J	6.0J-8.0J	235	733	1030	340	E	C	72	))
235/85R16LT	10PR	120/116	S	-	6.5J	6.0J-7.5J	235	806	1400	550	C	B	73	))
245/65R17	-	107	T	-	7.0J	7.0J-8.5J	248	750	975	300	E	C	71	))
245/70R16	-	111	S	XL	7.0J	6.5J-8.0J	248	750	1090	340	E	C	72	))
245/70R17LT	10PR	119/116	S	-	7.0J	6.5J-8.0J	248	776	1360	550	C	B	73	))
245/75R16	-	111	T	-	7.0J	6.5J-7.5J	248	774	1090	300	E	C	71	))
245/75R16LT	10PR	120/116	Q	-	7.0J	6.5J-7.5J	248	774	1400	550	C	B	73	))
255/65R16	-	109	T	-	7.5J	7.0J-9.0J	260	738	1030	300	E	C	72	))
255/70R15	-	108	T	-	7.5J	6.5J-8.5J	260	739	1000	300	E	C	72	))
265/60R17	-	108	S	-	8.0J	7.5J-8.5J	272	750	1000	300	-	-	-	-
265/60R18	-	110	T	-	8.0J	7.5J-9.5J	272	775	1060	300	E	C	72	))
265/65R17	-	112	T	-	8.0J	7.5J-9.5J	272	776	1120	300	E	C	72	))
265/65R18	-	114	T	-	8.0J	7.5J-8.5J	272	801	1180	300	-	-	-	-
265/70R16	-	112	T	-	8.0J	7.5J-8.5J	272	778	1120	300	E	C	72	))
265/70R17	-	115	T	-	8.0J	7.0J-9.0J	272	804	1215	300	E	C	72	))
265/70R17LT	10PR	121/118	Q	-	8.0J	7.0J-9.0J	272	804	1450	550	C	B	73	))
265/75R16	-	116	S	-	7.5J	7.0J-9.0J	267	804	1250	300	E	C	72	))
275/65R17	-	115	T	-	8.0J	7.5J-9.5J	279	790	1215	300	E	C	72	))
275/65R17	-	119	T	XL	8.0J	7.5J-9.5J	279	790	1360	340	E	C	73	))
275/65R17LT	10PR	121/118	R	-	8.0J	7.5J-9.5J	279	790	1450	550	C	B	73	))
275/70R16	-	114	T	-	8.0J	7.0J-9.0J	279	792	1180	300	E	C	72	))
285/65R17	-	116	T	-	8.5J	8.0J-10.0J	292	802	1250	300	-	-	-	-
30X9.50R15LT	6PR	104	Q	-	7.5J	6.5J-8.5J	240	750	900	350	C	B	73	))
31X10.50R15LT	6PR	109	S	-	8.5J	7.0J-9.0J	268	775	1030	350	C	B	73	))
P225/75R15	-	102	T	-	6.0J	6.0J-7.5J	223	719	850	300	E	C	71	))

SP-306



- Block pattern with hale shoulder design, easily break into the sandy/clay, provide excellent off road grip and traction.
- Unique connected wide sipes design brings excellent water dispersion, safety and self-cleaning performance.
- Continuous broad central rib design ensures precise straight driving performance and excellent curve tracking performance.
- New compound and structure design provides all-round road response and off road traction.
- Computer optimized variable tread pitch design, effectively reduces the noise during driving, and gives the driver good ride comfort.

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
235/75R15	109	T	XL	6.5J	6.0J-8.0J	235	733	1030	340	C	B	72	))
265/70R16	112	T	-	8.0J	7.5J-8.5J	272	778	1120	300	C	B	72	))
265/65R17	116	T	XL	8.0J	7.5J-9.5J	272	776	1250	340	C	B	73	))
265/65R17 OWL	116	T	XL	8.0J	7.5J-9.5J	272	776	1250	340	C	B	73	))



MASPIRE M/T



SUV



Computer designed blocks with multi-biting edges provide massive off-the-road traction. Specially designed groove shape enhances mud or snow grip further.

The optimized ledged groove walls prevent mud and snow buildup. Stone ejector effectively prevents stone retention and penetration.

Aggressive tread blocks with high scrub compound provide excellent chip & cut resistance. Extensive and tough over-the-shoulder tread protects the sidewall from cutting and snagging.

Open, scalloped shoulder block combined with over-the-shoulder tread design provides additional forward traction in deep mud and snow condition.



EXCELLENT GRIP



DURABILITY



TRACTION

- Deep siping in the tread blocks helps maintain grip on wet surfaces.
- Optimum blocks layout provides great on-road comfort.
- Optimum groove spacing reduces noise effectively.

Size	PR	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
LT225/75R16	10PR	115/112	Q	6.0J	6.0J-7.0J	223	744	1215	550
LT235/75R15 OWL	6PR	104/101	Q	6.5J	6.0J-7.0J	235	733	900	350
LT245/75R16	10PR	120/116	Q	7.0J	6.5J-8.0J	248	774	1400	550
30X9.50R15LT OWL	6PR	104	Q	7.5J	6.5J-8.5J	240	750	900	350
LT265/75R16 OWL	10PR	123/120	Q	7.5J	7.0J-8.0J	267	804	1550	550
LT265/70R16	10PR	121/118	Q	8.0J	7.0J-8.5J	272	778	1450	550
LT265/65R17	10PR	120/117	Q	8.0J	7.5J-9.5J	272	776	1400	550
31X10.50R15LT OWL	6PR	109	Q	8.5J	7.0J-9.0J	268	775	1030	350
LT265/75R16 OWL	10PR	123/120	Q	7.5J	7.0J-8.0J	267	804	1550	550

Owl stands for white side wall

VAN<



VAN

SP-102

CSR34

CSR80

SP-101

CSR35

CSR48

ASR71

CSR40

CSR81

SP-01

CSR69

CSR45


LT

SP-112

CSR44

CSR50

SP-102

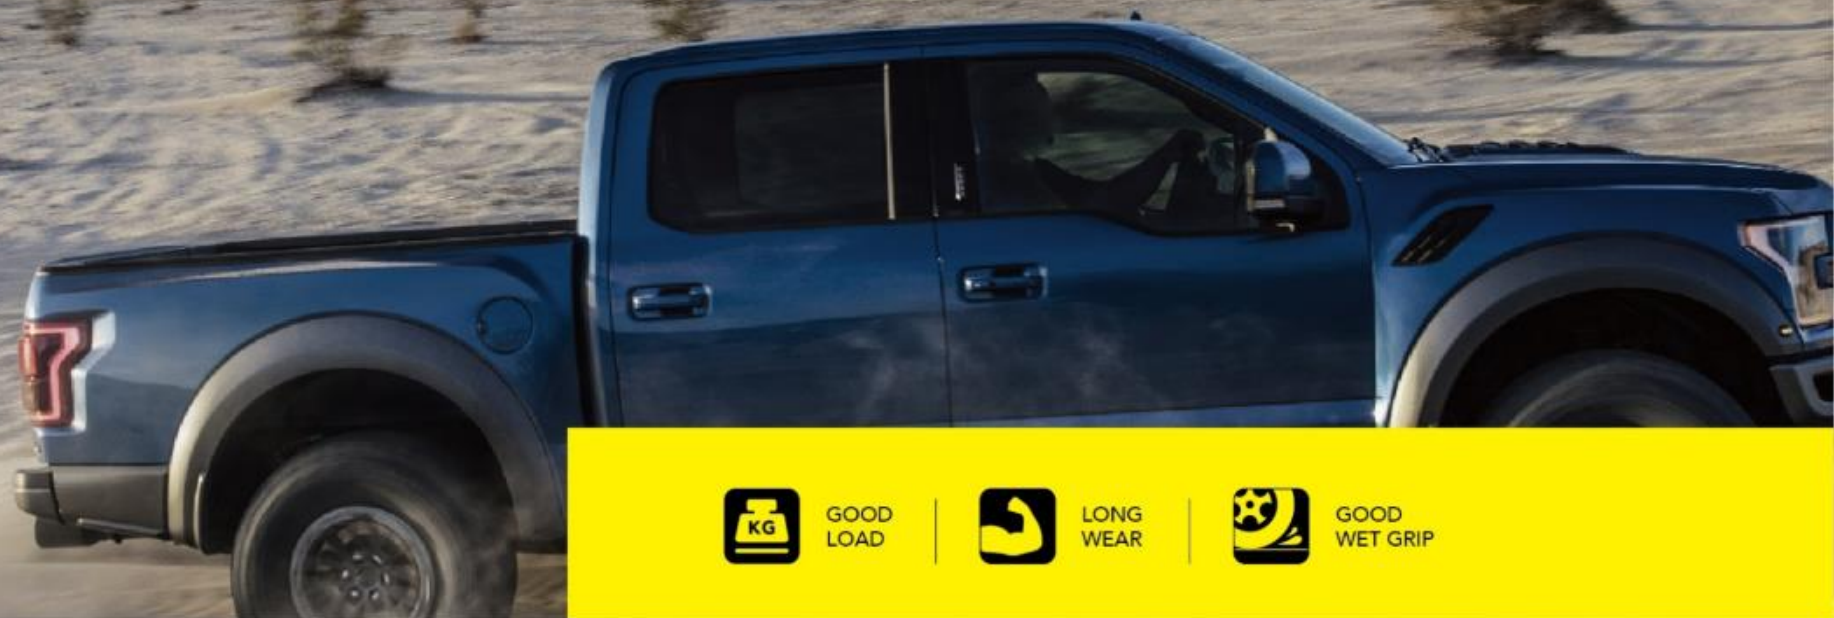

GOOD
LOAD



LONG
WEAR



GOOD
WET GRIP



Deep tread and refined compound improve wear life significantly.

Continuous shoulder ribs ensure even wear.

Wide tread and low void-to-fill ratio ensure big footprint, provide longevity and comfortable ride experience.

Nylon cap plies coupled with high tensile belt package give the tread reliable stability.

Commercial purpose oriented contour and carcass provide good high load service.

• Zigzag grooves enhance traction, water evacuation and wet grip.

• Special stone ejector design ejects stone and sand well.

Size	PR	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
165R14LT	8	96/95	R	4.5J	4.0J-5.0J	165	620	850	450
175/75R14LT	10	99/96	S	5.0J	4.5J-5.5J	177	618	775	550
185R14C	8	102/100	R	5.5J	5.0J-6.0J	189	652	850	450
195R14C	8	106/104	R	5.5J	5.0J-6.0J	198	666	950	450
195R15C	8	106/104	R	5.5J	5.0J-6.0J	198	690	950	450
* 225/75R15C	8	116/114	Q	6.0J	6J-7J	223	719	1250	375

Notes: * under development

SP-101

ALL TERRAIN COMMERCIAL
LT / VAN / PICK-UP



- Widened shoulder pattern design reinforces toughness of the pattern block and improves tire durability and load performance.
- Tread and shoulder pattern with ledged design reinforces tire with stone ejection ability and improves safety and durability.
- Shoulder diamond sipes design distributes reasonable heat release zone and improves durability.
- Two continuous central tie-bar design improves water dispersion and optimizes wet road stability.

- Optimized profile and high tensile material application further improve carrying performance.
- Micro sipes design ensures even wear and more wear resistance.
- Zigzag groove reinforces driving performance and effectively cut into water film easily and improves the trafficability on slip and muddy road.

Size	PR	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
155R12C	8PR	88/86	Q	4.50B	4.00B-5.0J	157	553	560	450
175R14C	8PR	99/98	Q	5.0J	4.5J-5.5J	178	634	775	450
185R14C	8PR	102/100	R	5.5J	5.0J-6.0J	189	652	850	450
195R14C	8PR	106/104	R	5.5J	5.0J-6.0J	198	666	950	450
195R15C	8PR	106/104	R	5.5J	5.0J-6.0J	198	690	950	450

ASR71

ALL TERRAIN COMMERCIAL
LT / VAN / PICK-UP



Size	PR	LI	SS	Load Type	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
165/70R13C	6PR	88/86	T	-	5.0J	4.5J-5.0J	170	562	560	375	C	A	72	))
165/70R14C	6PR	89/87	R	-	5.0J	4.5J-5.0J	170	588	580	375	C	A	72	))
165R13C	8PR	94/93	Q	-	4.5J	4.00B,5.00B	167	596	670	450	C	A	72	))
175/65R14C	6PR	90/88	T	-	5.0J	5.0J-5.5J	177	584	600	375	C	A	72	))
175/70R14C	6PR	95/93	T	-	5.0J	4.5J-5.5J	177	602	690	375	C	A	72	))
175/70R14LT	8PR	95/93	S	-	5.0J	4.5J-5.5J	177	602	690	450	-	-	-	-
175/75R16C	8PR	101/99	Q	-	5J	4.5J,5.5J	177	668	825	475	C	A	72	))
175R13C	8PR	97/95	Q	-	5.00B	4.50B,5.5J	177	610	730	450	C	A	72	))
175R14C	8PR	99/98	Q	-	5.0J	4.5J-5.5J	177	636	775	450	C	A	72	))
175R16C	6PR	98/96	Q	-	5.0J	4.5J-5.5J	178	684	750	375	C	A	72	))
185/75R16C	8PR	104/102	R	-	5.0J	5.0J-6.0J	184	684	900	475	C	A	72	))
185R15C	8PR	103/102	R	-	5.5J	5.0J-6.0J	188	674	875	450	C	A	72	))
195/60R16C	6PR	99/97	T	-	6.0J	5.5J-6.5J	201	640	775	375	C	A	72	))
195/65R16C	8PR	104/102	R	-	6.0J	5.5J-6.0J	201	660	900	544	C	A	72	))
195/70R15C	8PR	104/102	N	-	6J	5.5J,6.5J	201	655	900	450	C	A	72	))
195/75R16C	8PR	107/105	R	-	5.5J	5.0J-6.0J	196	698	975	475	C	A	72	))
205/65R15C	6PR	102/100	T	-	6.0J	5.5J-6.5J	209	647	850	375	C	A	72	))
205/65R16C	8PR	107/105	T	-	6.0J	5.5J-6.5J	209	672	975	544	C	A	72	))
205/70R15C	8PR	106/104	R	-	6.0J	5.5J-6.5J	209	669	950	450	C	A	72	))
205/75R16C	8PR	110/108	Q	-	5.5J	5J,6J	203	714	1060	475	C	A	72	))
205/80R16	-	104	S	XL	5.5J	5.0J-7.0J	203	734	900	340	-	-	-	-
205R16C	8PR	110/108	S	-	6J	6.5J	208	736	1060	450	C	A	72	))
215/60R16C	6PR	103/101	T	-	6.5J	6.0J-7.0J	221	664	875	375	C	A	72	))
215/65R15C	6PR	104/102	T	-	6.5J	6.5J-7.0J	221	661	900	375	C	A	72	))
215/65R16C	8PR	109/107	R	-	6.5J	6.0J-7.0J	221	686	1030	544	C	A	72	))
215/70R15C	8PR	109/107	R	-	6.5J	5.5J-7.0J	221	683	1030	450	C	A	72	))
215/75R16C	8PR	113/111	Q	-	6J	5.5J,6.5J	216	728	1150	475	C	A	72	))
215/75R16C	10PR	116/114	S	-	6J	5.5J,6.5J	216	728	1250	550	-	-	-	-
215R14C	8PR	112/110	P	-	6J	5.5J,6.5J	218	700	1120	450	C	A	72	))
225/65R16C	8PR	112/110	R	-	6.5J	6.0J-7.0J	228	698	1120	475	C	A	71	))
225/70R15C	8PR	112/110	R	-	6.5J	6.0J-7.0J	228	697	1120	450	C	A	72	))
225/75R16C	10PR	121/120	R	-	6.0J	6.0J-7.0J	223	744	1450	575	C	A	72	))
235/65R16C	8PR	115/113	R	-	7.0J	6.5J-7.5J	240	712	1215	475	C	A	72	))

SP-01

COMMERCIAL VAN / PICK-UP



Size	PR	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
185R14C	8PR	102/100	Q	5.5J	5J,6J	189	652	850	450	C	B	71	))
185R14LT	8PR	102/100	Q	5.5J	5J,6J	189	652	850	450	-	-	-	-
195R14C	8PR	106/104	Q	5.5J	6J	198	666	950	450	C	B	71	))
195R15C	8PR	106/104	Q	5.5J	6J	198	690	950	450	C	B	71	))

CSR34

COMMERCIAL VAN / PICK-UP



Size	PR	LI	SS	Load Type	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
215/80R16	-	107	S	XL	6J	5.5J,6.5J	216	750	975	290
235/75R15LT	6PR	104/101	Q	-	6.5J	6J,7J	235	733	900	350
31X10.50R15LT	6PR	109	Q	-	8.5J	8J,9J	268	775	1030	350

CSR35

SUITABLE FOR VARIOUS LIGHT TRUCK/PICKUP TRUCKS



Size	PR	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
205R14C	6PR	105/103	Q	6J	5.5J,6.5J	208	686	925	375	C	B	72	))

CSR40

COMMERCIAL VAN / PICK-UP



Size	PR	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
155R13C	6PR	85/83	Q	4.50B	4.00B,4.5J	157	578	515	350	E	A	72	))

CSR69

COMMERCIAL VAN / PICK-UP



Size	U	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
235/75R15	105	S	6.5J	6J,7J	235	733	925	250

CSR48

COMMERCIAL VAN / PICK-UP



Size	PR	U	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
225/70R15C	8PR	112/110	Q	6.5J	6J,7J	228	697	1120	450

CSR80

COMMERCIAL VAN / PICK-UP



Size	PR	U	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
145R12LT	6PR	80/78	Q	4.00B	3.50B,4J	145	537	450	350	-	-	-	-
145R12LT	8PR	86/84	N	4.00B	3.50B,4J	145	537	530	450	E	B	72	))
155R12C	6PR	83/81	Q	4.50B	4.00B,4.5J	157	553	487	350	E	B	72	))
155R12C	8PR	88/86	Q	4.50B	4.00B,4.5J	157	553	560	450	-	-	-	-

CSR81

COMMERCIAL VAN / PICK-UP



Size	PR	U	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
175R16C	6PR	98/96	Q	5J	4.5J,5.5J	178	684	750	375	E	C	71	))

CSR45

SUITABLE FOR VARIOUS
LIGHT TRUCK/PICKUP TRUCKS



Size	PR	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
215/70R15C	8PR	109/107	Q	6.5J	6J,7J	221	683	1030	450	C	C	71	))

CSR44

SUITABLE FOR VARIOUS
LIGHT-LOAD GOODS VEHICLES



Size	PR	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
7.00R16LT	10PR	111/107	N	5.50F	6.00G	200	775	1090	560	C	C	72	))

SP-112

ALL TERRAIN COMMERCIAL LIGHT
TRUCK, SMALL & MEDIUM-SIZED BUS



Size	PR	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
5.00R12LT	8PR	83/81	P	3.50B	4.00B	143	568	487	450	-	-	-	-
6.00R13LT	10PR	98/93	L	4.50B	4.00B-5.00B	170	655	750	560	-	-	-	-
6.00R14LT	10PR	100/95	L	4.5J	4J,5J	170	680	800	560	-	-	-	-
6.00R15LT	10PR	101/97	L	4.50E	4.5J	170	705	825	560	-	-	-	-
6.50R15LT	10PR	106/101	Q	5.50F	6.00G	185	730	950	560	C	C	72	))
6.50R16LT	10PR	107/102	Q	4.50E	5.00E,5.00F	185	750	975	560	C	C	72	))
6.50R15LT	8PR	101/97	Q	4.50E	6.00G	185	730	825	460	-	-	-	-
7.00R15LT	10PR	109/105	Q	5.50F	6.00G	200	750	1030	560	C	C	72	))
7.00R16LT	10PR	111/107	Q	5.50F	6.00G	200	775	1090	560	C	C	72	))
7.00R16LT	12PR	115/110	Q	5.50F	6.00G	200	775	1215	670	C	C	72	))

CSR50

COMMERCIAL VAN / PICK-UP



Size	PR	LI	SS	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
7.00R15LT	10PR	109/105	L	5.50F	6.00G	200	750	1030	560

TRAILER

ST01

FOR SPORT TRAILER
PURPOSE ONLY



GOOD
LOAD



SAFE



GOOD
MILEAGE



- Reinforced shoulders and rigid ribs for good load.
- Notched shoulders even out stress and improve endurance.
- Four massive grooves to evacuate water effectively for safer driving on wet road.
- Various pitches design for even wear.
- Continuous ribs for stable ride.
- Optimized groove layout and mature profile for better load.
- Continuous ribs coupled with dense sipes for even and good wear.

Size	PR	LI	SS	Measure Rim	Section width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)
ST175/80R13	8PR	97/93	L	5.00B	177	610	730	450
ST205/75R14	8PR	105/101	M	5.5J	203	664	925	450
ST205/75R15	6PR	101/97	M	5.5J	203	689	825	350
ST205/75R15	8PR	107/102	M	5.5J	203	689	975	450
ST215/75R14	8PR	108/103	L	6.0J	216	678	1000	450
ST225/75R15	10PR	117/112	M	6.0J	223	719	1285	550
ST225/75R15	8PR	113/108	M	6.0J	223	719	1150	450
ST235/80R16	10PR	124/120	M	6.5J	235	782	1600	550
ST235/85R16	10PR	125/121	M	6.5J	235	806	1650	550

ST01



ALL SEASON

All Season

SP-401



FixClima SP-401



GOOD
HANDLING



WET
GRIP



COMFORT



ALL
WEATHER



Unique tread compound provides reliable traction in all weather conditions.

Massive lateral grooves combined with open shoulder disperse water quickly and prevent snow buildup.

3D siping cuts into water film deeply and enhances wet grip.

"V" shaped pattern along with dense 3D sipes delivers improved handling and grip in turns.

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
*155/65R14	75	T	-	4.5J	4.5J-5.5J	157	558	387	300	-	-	-	-
155/70R13	75	T	-	4.50B	4.00B-5.0J	157	548	387	300	E	C	71	))
155/80R13	79	T	-	4.5J	4.00B-5.0J	157	578	437	300	E	C	71	))
165/60R14	79	H	XL	5.0J	4.5J-6.0J	170	554	437	340	E	C	71	))
*165/65R14	79	H	-	5.0J	4.5J-6.0J	170	570	437	300	-	-	-	-
165/70R13	79	T	-	5.0J	4.00B-5.5J	170	562	437	300	E	C	71	))
165/70R14	81	T	-	5.0J	4.0J-5.5J	170	588	462	300	E	C	71	))
175/65R14	86	H	XL	5.0J	5.00B-6.0J	177	584	530	340	E	C	71	))
175/65R15	88	H	XL	5.0J	5.0J-6.0J	177	609	560	340	E	C	71	))
175/70R13	82	T	-	5.0J	4.50B-6.0J	177	576	475	300	E	C	71	))
185/55R14	80	H	-	6.0J	5.0J-6.5J	194	560	450	300	E	C	71	))
185/55R15	86	V	XL	6.0J	5.0J-6.5J	194	585	530	340	E	C	72	))
185/60R14	82	H	-	5.5J	5.0J-6.5J	189	578	475	300	E	C	71	))
185/60R15	88	H	XL	5.5J	5.0J-6.5J	189	603	560	340	E	C	71	))
185/65R14	86	H	-	5.5J	5.0J-6.5J	189	596	530	300	E	C	71	))
185/65R15	88	H	-	5.5J	5.0J-6.5J	189	621	560	300	E	C	71	))
195/50R15	86	W	XL	6.0J	5.5J-7.0J	201	577	530	340	E	C	72	))
195/55R15	89	V	XL	6.0J	5.5J-7.0J	201	595	580	340	E	C	72	))
195/55R16	91	V	XL	6.0J	5.5J-7.0J	201	620	615	340	E	C	72	))
195/60R15	88	H	-	6.0J	5.5J-7.0J	201	615	560	300	E	C	72	))
195/65R15	95	V	XL	6.0J	5.5J-7.0J	201	635	690	340	E	C	72	))
*205/45R16	83	W	-	7.0J	6.5J-7.5J	206	590	487	300	-	-	-	-
*205/50R17	93	W	XL	6.5J	5.5J-7.5J	214	638	650	340	-	-	-	-
205/55R16	91	H	-	6.5J	5.5J-7.5J	214	632	615	300	E	C	72	))
205/55R16	94	V	XL	6.5J	5.5J-7.5J	214	632	670	340	E	C	72	))
205/60R16	96	V	XL	6.0J	5.5J-7.5J	209	652	710	340	E	C	72	))
215/45R17	91	W	XL	7.0J	7.0J-8.0J	219	571	615	340	E	C	72	))
*215/55R16	97	V	XL	7.0J	6.0J-7.5J	226	642	730	340	-	-	-	-
215/60R16	99	V	XL	6.5J	6.0J-7.5J	221	664	775	340	E	C	72	))
*215/60R17	100	V	XL	6.5J	6.0J-7.5J	221	690	800	340	-	-	-	-
215/65R16	98	H	-	6.5J	6.0J-7.5J	221	686	750	300	E	C	71	))
225/40R18	92	W	XL	8.0J	7.5J-9.0J	230	637	630	340	E	C	72	))
225/45R17	94	V	XL	7.5J	7.0J-8.5J	225	634	670	340	E	C	72	))
*225/50R17	98	V	XL	7.0J	6.0J-8.0J	233	658	750	340	-	-	-	-
225/55R16	99	V	XL	7.0J	6.0J-8.0J	233	654	775	340	E	C	72	))
*225/55R18	102	V	XL	7.0J	6.0J-8.0J	233	705	850	340	-	-	-	-
*225/65R17	106	V	XL	6.5J	6.0J-8.0J	228	724	950	340	-	-	-	-
*235/45R17	97	W	XL	8.0J	7.5J-9.0J	236	644	730	340	-	-	-	-
*235/55R17	103	W	XL	7.5J	6.5J-8.5J	245	690	875	340	-	-	-	-
295/40R21	111	V	XL	10.5J	10.0J-11.5J	301	769	1090	340	E	C	75	))

Notes: * under development

WINTER



WINTER

SP-901


SP-902



SP-901



GOOD GRIP ON ICE AND SNOWY ROAD HANDLING SAFETY



- Ice-axe shaped pattern groove design provides excellent grip on snowy conditions.



- The zigzag patterns increase the friction between tires and snowy road, reduce the chance of the car slipping on the snowy road.



- Special round hole design inspired from the bionic gecko's toe, increasing surface adsorption capability between the tire and ice whilst providing excellent traction and braking on hard ice and snowy road conditions.



- Special silica compound & soft tread for excellent traction and braking performance on snowy surfaces.

- 3 wide lugs provide excellent water dispersion performance.



- 3D sipes ensure the pattern blocks to squirm with each other and provide interlocking function, taking into account the tread rigidity.

Size	LI	SS	Load Type	Measure Rim	Approved Rim	Section Width (mm)	O.D (mm)	Max. Load (kg)	Max. Inflation Pressure (kPa)	Rolling Resistance	Wet Grip	Noise Value	Noise Class
155/65R14	75	T	-	4.5J	4.50B-5.5J	157	558	387	300	E	E	71	))
165/60R14	75	T	-	5.0J	4.5J-6.0J	170	554	387	300	E	E	71	))
165/65R14	79	T	-	5.0J	4.50B-6.0J	170	570	437	300	E	E	71	))
165/65R15	81	T	-	5.0J	4.5J-6.0J	170	595	462	300	E	E	71	))
165/70R14	85	T	XL	5.0J	4.0J-5.5J	170	588	515	340	E	E	71	))
175/55R15	77	T	-	5.5J	5.0J-6.0J	182	573	412	300	E	E	71	))
175/65R14	86	T	XL	5.0J	5.00B-6.0J	177	584	530	340	E	E	71	))
175/65R15	88	T	XL	5.0J	5.0J-6.0J	177	609	560	340	E	E	71	))
175/70R14	88	T	XL	5.0J	4.5J-6.0J	177	602	560	340	E	E	71	))
175/80R14	88	T	-	5.0J	4.5J-6.0J	177	636	560	300	E	E	71	))
185/55R14	80	H	-	6.0J	5.0J-6.5J	194	560	450	300	E	E	71	))
185/55R15	86	H	XL	6.0J	5.0J-6.5J	194	585	530	340	E	E	71	))
185/60R14	86	H	XL	5.5J	5.0J-6.5J	189	578	530	340	E	E	71	))
185/60R15	88	T	XL	5.5J	5.0J-6.5J	189	603	560	340	E	E	71	))
185/65R14	86	T	-	5.5J	5.0J-6.5J	189	596	530	300	E	E	71	))
185/65R15	88	H	-	5.5J	5.0J-6.5J	189	621	560	300	E	E	71	))
185/70R14	88	T	-	5.5J	4.5J-6.0J	189	616	560	300	E	E	71	))
195/45R16	84	H	XL	6.5J	6.0J-7.5J	195	582	500	340	E	E	72	))
195/50R15	82	H	-	6.0J	5.5J-7.0J	201	577	475	300	E	E	72	))
195/50R16	88	V	XL	6.0J	5.5J-7.0J	201	602	560	340	E	E	72	))
195/55R15	85	H	-	6.0J	5.5J-7.0J	201	595	515	300	E	E	72	))
195/55R16	87	H	-	6.0J	5.5J-7.0J	201	620	545	300	E	E	72	))
195/60R14	86	S	-	6.0J	5.5J-7.0J	201	590	530	300	E	E	72	))
195/60R15	88	H	-	6.0J	5.5J-7.0J	201	615	560	300	E	E	72	))
195/60R16	89	H	-	6.0J	5.5J-7.0J	201	640	580	300	E	E	72	))
195/65R15	91	H	-	6.0J	5.5J-7.0J	201	635	615	300	E	E	72	))
205/40R17	84	V	XL	7.5J	7.0J-8.0J	212	596	500	340	E	E	72	))
205/45R16	87	V	XL	7.0J	6.5J-7.5J	206	590	545	340	E	E	72	))
205/45R17	88	V	XL	7.0J	6.5J-7.5J	206	616	560	340	E	E	72	))
205/50R16	91	V	XL	6.5J	5.5J-7.5J	214	612	615	340	E	E	72	))
205/50R17	93	V	XL	6.5J	5.5J-7.5J	214	638	650	340	E	E	72	))
205/55R16	91	H	-	6.5J	5.5J-7.5J	214	632	615	300	E	E	72	))
205/55R17	95	H	XL	6.5J	5.5J-7.5J	214	658	690	340	E	E	72	))
205/60R16	92	H	-	6.0J	5.5J-7.5J	209	652	630	300	E	E	72	))
205/60R17	96	H	XL	6.0J	5.5J-7.5J	209	652	710	340	E	E	72	))
205/65R15	94	T	-	6.0J	5.5J-7.5J	209	647	670	300	E	E	72	))
205/70R15	96	T	-	6.0J	5.0J-7.0J	209	669	710	300	E	E	72	))
215/40R17	87	V	XL	7.5J	7.0J-8.0J	218	604	545	340	E	E	72	))
215/45R16	91	V	XL	7.0J	7.0J-8.0J	213	626	615	340	E	E	72	))
215/50R17	91	H	-	7.0J	6.0J-7.5J	226	648	615	300	E	E	72	))
215/55R16	97	H	XL	7.0J	6.0J-7.5J	226	642	730	340	E	E	72	))
215/55R17	94	H	-	7.0J	6.0J-7.5J	226	668	670	300	E	E	72	))
215/55R17	98	V	XL	7.0J	6.0J-7.5J	226	668	750	340	E	E	72	))
215/55R18	95	H	-	7.0J	6.0J-7.5J	226	693	690	300	E	E	72	))
215/60R16	99	H	XL	6.5J	6.0J-7.5J	221	664	775	340	E	E	72	))
215/60R17	96	H	-	6.5J	6.0J-7.5J	221	690	710	300	E	E	72	))
215/65R16	98	H	-	6.5J	6.0J-7.5J	221	686	750	300	E	E	72	))
215/70R16	100	T	-	6.5J	5.5J-7.0J	221	708	800	300	E	E	72	))
225/35R19	88	W	XL	8.0J	7.5J-9.0J	230	641	560	340	E	E	72	))
225/40R18	92	V	XL	8.0J	7.5J-9.0J	230	637	630	340	E	E	72	))
225/45R17	94	V	XL	7.5J	7.0J-8.5J	225	634	670	340	E	E	72	))
225/45R18	95	W	XL	7.5J	7.0J-8.5J	225	659	690	340	E	E	72	))
225/50R17	98	V	XL	7.0J	6.0J-8.0J	233	658	750	340	E	E	72	))
225/50R18	99	V	XL	7.0J	6.0J-8.0J	233	683	775	340	E	E	72	))
225/55R16	99	V	XL	7.0J	6.0J-8.0J	233	654	775	340	E	E	72	))
225/55R17	101	V	XL	7.0J	6.0J-8.0J	233	680	825	340	E	E	72	))
225/55R18	102	V	XL	7.0J	6.0J-8.0J	233	705	850	340	E	E	72	))
225/60R16	102	H	XL	6.5J	6.0J-8.0J	228	676	850	340	E	E	72	))
225/60R17	99	H	-	6.5J	6.0J-8.0J	228	702	775	300	E	E	72	))
225/60R18	100	H	-	6.5J	6.0J-8.0J	228	727	800	300	E	E	72	))
225/65R17	102	H	-	6.5J	6.0J-8.0J	228	724	850	300	E	E	72	))
225/70R16	103	H	-	6.5J	6.0J-7.5J	228	722	875	300	E	E	72	))
235/35R19	91	W	XL	8.5J	8.0J-9.5J	241	647	615	340	E	E	72	))
235/40R18	95	V	XL	8.5J	8.0J-9.5J	241	645	690	340	E	E	72	))
235/45R17	97	V	XL	8.0J	7.5J-9.0J	236	644	730	340	E	E	69	))
235/45R18	98	V	XL	8.0J	7.5J-9.0J	236	669	750	340	E	E	69	))
235/50R18	101	V	XL	7.5J	6.5J-8.5J	245	693	825	340	E	E	69	))
235/50R19	103	V	XL	7.5J	6.5J-8.5J	245	719	875	340	E	E	69	))
235/55R17	103	V	XL	7.5J	6.5J-8.5J	245	690	875	340	E	E	69	))
235/55R18	104	V	XL	7.5J	6.5J-8.5J	245	715	900	340	E	E	69	))
235/55R19	105	V	XL	7.5J	6.5J-8.5J	245	741	925	340	E	E	69	))
235/60R16	100	H	-	7.0J	6.5J-8.5J	240	688	800	300	E	E	69	))
235/60R17	102	V	-	7.0J	6.5J-8.5J	240	714	850	300	E	E	69	))
235/60R18	107	V	XL	7.0J	6.5J-8.5J	240	739	975	340	E	E	69	))
235/65R17	104	V	-	7.0J	6.5J-8.5J	240	738	900	300	E	E	69	))
235/65R17	108	V	XL	7.0J	6.5J-8.5J	240	738	1000	340	E	E	69	))
235/65R18	110	H	XL	7.0J	6.5J-8.5J	240	763	1060	340	E	E	69	))
235/70R16	106	T	-	7.0J	6.0J-8.0J	240	736	950	300	E	E	69	))
235/75R15	109	T	XL	6.5J	6.0J-8.0J	235	733	1030	340	E	E	69	))
245/40R18	97	V	XL	8.5J	8.0J-9.5J	248	653	730	340	E	E	72	))
245/40R19	98	W	XL	8.5J	8.0J-9.5J	248	679	750	340	E	E	72	))
245/45R17	99	V	XL	8.0J	7.5J-9.0J	243	652	775	340	E	E	69	))
245/45R18	100	V	XL	8.0J	7.5J-9.0J	243	677	800	340	E	E	69	))
245/45R17	111	H	XL	7.0J	7.0J-8.5J	248	750	1090	340	E	E	69	))
245/70R16	107	T	-	7.0J	6.5J-8.0J	248	750	975	300	E	E	69	))
255/40R18	99	H	XL	9.0J	8.5J-10.0J	260	661	775	340	E	E	73	))
255/45R19	104	V	XL	8.5J	8.0J-9.5J	255	713	900	340	E	E	73	))
255/50R19	107	V	XL	8.0J	7.0J-9.0J	265	739	975	340	E	E	73	))
255/55R18	109	V	XL	8.0J	7.0J-9.0J	265	767	1030	340	E	E	73	))
255/55R19	111	V	XL	8.0J	7.0J-9.0J	265	763	1090	340	E	E	73	))
265/60R18	114	H	XL	8.0J	7.5J-9.5J	272	775	1180	340	E	E	73	))
265/65R17	116	H	XL	8.0J	7.5J-9.5J	272	776	1250	340	E	E	73	))
265/70R16	112	T	-	8.0J	7.0J-9.0J	272	778	1120	300	E	E	73	))
275/40R20	106	W	XL	9.5J	9.0J-11.0J	278	728	950	340	E	E	73	))
275/45R20	110	W	XL	9.0J	8.5J-10.0J	273	756	1060	340	E	E	73	))
295/35R21	107	V	XL	10.5J	10.0J-11.5J	301	739	975	340	E	E	73	))

Notes: • under development

