

Together And Further



E-MAIL

TBR2@jinyutires.com



TELEPHONE

0086-400-600-7809



WEBSITE

www.jinyutires.com



ADDRESS

10th Floor,Block A,Platinum Plaza,No.5 Wenling Road,Laoshan District,Qingdao,China



TRUCK AND BUS TIRES



CATALOG 2025
Trucks and Buses Tires

ENTERPRISE INTRODUCTION

Enterprise Profile

JINYU Tire Group Co., Ltd. was founded in 1995, which is a professional tire R&D and manufacturing enterprise. The company has more than 6000 employees. By equipped with advanced tire production, research and development, testing equipment and professional technology, management team, the company has established a sound quality management system. There are three plants respectively located in China and Vietnam with total capacity of 8 million pcs/year. The company has set up sales centers in North America, Europe, Vietnam and other countries in local operation. The sales network covers more than 100 countries and regions in the Middle East, Asia, Europe, the United States, Africa and so on.

Jinyu Certificates

The company has obtained certificates like CCC, DOT, ECE, INMETRO, ISO/TS16949, GCC, SONCAP, TBS, SARS and so on. The company's laboratory has been certified by CNAS and ISO/IEC 17025 and obtained many national Patents.

Research and Development

The company believes proving excellent quality is a way of life and takes every opportunity to instill this value throughout the entire enterprise. As proof of this commitment, a considerable investment has been made in R&D over the last 30 years. The R&D center not only utilizes advanced equipment but also commits to having efficient operations and maintaining a strong teamwork culture. The team is hyper-focused on marketing, product planning, formula research and development, as well as, structure design and product testing.

Enterprise Mission

Concentrate on rubber tire technology and service development and application;
Commit ourselves to providing customers the best value and experience.

Enterprise Vision

To be the best tire supplier, trusted globally and able to provide the best value and experience to customers and end-users.

Jinyu firmly adheres to the enterprise spirit, "Common benefit is above all" and the company's target of "Providing the customers with excellent quality products and a high level of service." We insist on focusing on our customer's demands, committing to our promises, operating legally, and developing scientifically to maximize the common benefit of consumers, distributors, suppliers, employees, shareholders, communities, governments, enterprises and other related parties.

"Common benefit is above all"!



Hi, I'm JIMI

We are committed to becoming the most trusted and creative business partner in the world, providing customers with the most cost-effective products and the finest customer service.



Steer

P09 JF518
P10 JF568
P12 JY522

Drive

P14 JD565	P18 JD571	P23 JD721
P14 JD710	P19 JD577	P24 JD755
P15 JD575	P20 JD727	P25 JD758
P16 JY711	P21 JY719	P26 JD660
P17 JY958	P22 JD720	P27 JD681

Trailer


P29 JT530	P32 JT582	P56 JY529
P30 JT560	P32 JT586	
P31 JT578	P33 JY598	

All-Position

P35 JA626	P41 JY566	P49 JD703	P58 JU555
P36 JD690	P42 JA525	P50 JD756	P59 JU551
P37 JA608	P43 JA526	P51 JD766	P60 JU558
P37 JA767	P44 JA661	P51 JD776	
P38 JA621	P45 JA665	P52 JD785	
P38 JA511	P46 JA906	P53 JY716	
P39 JY601	P47 JD762	P55 COACH	
P40 JY602	P48 JD786	P55 JF518pro	

Winter

P62 JW590	P63 JW591	P64 JW592
P65 JW593	P65 JW595	

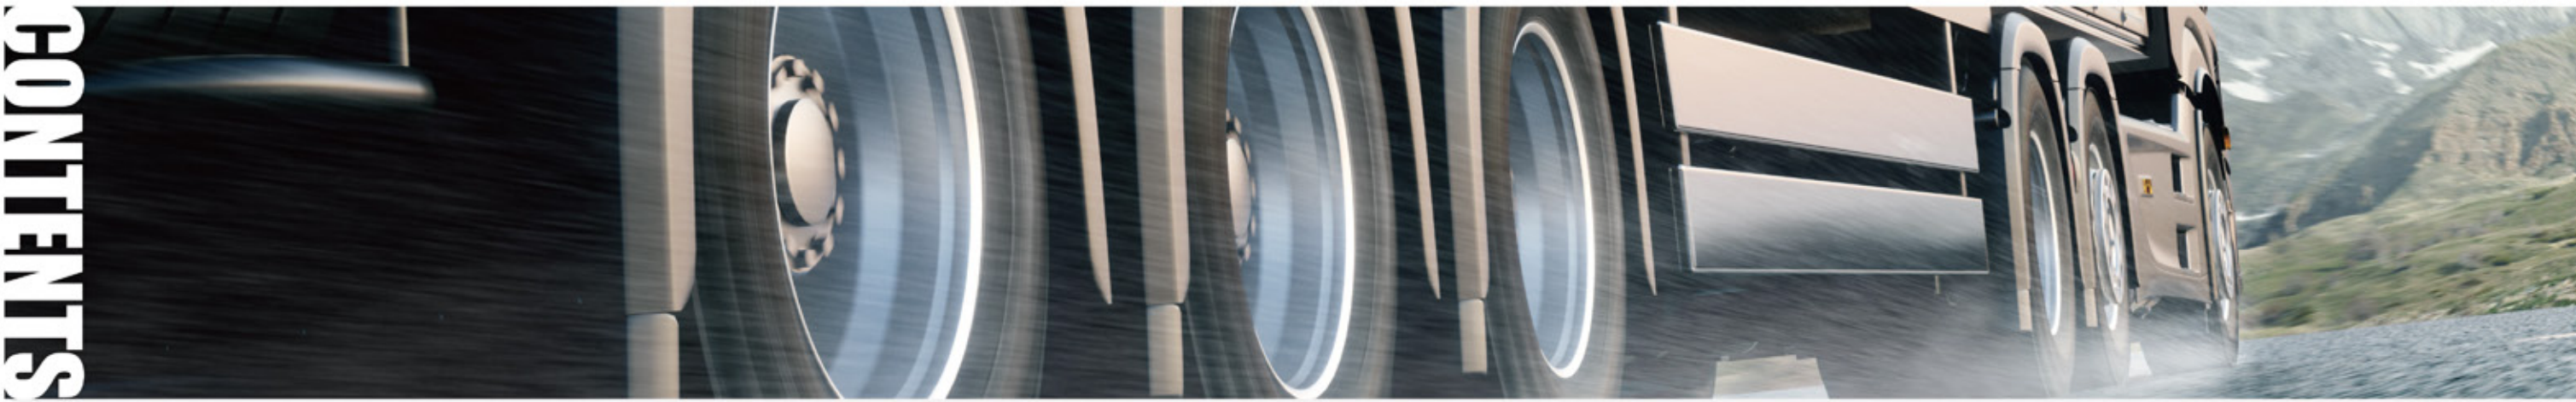

Steer	Drive	PATTERN	REFERENCE	Trailer	All-Position
 P09 JF518	  P14 JD565 P19 JD577		Long Haul	  P29 JT530 P30 JT560  P31 JT578	
  P10 JF568 P12 JY522	   P14 JD710 P15 JD575 P16 JY711    P17 JY958 P18 JD571 P22 JD720		Regional	   P32 JT582 JT586 P33 JY598  P56 JY529	   P37 JA608 P37 JA767 P38 JA621   P38 JA511 P41 JY566
	Winter	 P62 JW590	 P63 JW591	 P64 JW592	  P65 JW593 P65 JW595



Drive	PATTERN REFERENCE	All-Position
 P20 JD727  P21 JY719  P23 JD721  P24 JD755  P25 JD758  P26 JD660  P27 JD681	 On&Off Road	 P35 JA626  P36 JD690  P39 JY601  P40 JY602  P42 JA525  P43 JA526  P44 JA661  P45 JA665  P46 JA906
	 Off Road	 P47 JD762  P48 JD786  P49 JD703  P50 JD756  P51 JD766  P51 JD776  P52 JD785  P53 JY716
	 COACH/Urban	 P55 COACH  P55 JF518pro  P58 JU555  P59 JU551  P60 JU558

STEER

JF518



High Speed



Reduced Noise



High Durability



High Strength

- Excellent Stability on Handling
- Outstanding High Speed Performance
- Low Heat Generation
- High Wear Resistance
- Superior Ride Comfort

Suitable 





The smooth tread design solves the irregular-wear problems of most competitor products. Straight sidewall, good absorption and cushioning, comfortable driving experience.

Add silica and nano-filler, adopt high-dispersion technology, uniformly wear, and increase product mileage by 12%.




Origin		Size	PR	LI/ SS		Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
							(kgs)		(lbs)		(kPa)		(PSI)				
							S	D	S	D	S	D	S	D			
•		8.25R20	16	139/137	L	6.5	2430	2300	5360	5070	930	930	135	135	14.0	974	236
•		9.00R20	16	144/142	L	7.0	2800	2650	6175	5840	900	900	130	130	15.0	1019	259
•		11R22.5	16	148/145	M	8.25	3150	2900	6940	6395	850	850	123	123	16.5	1054	279
•	•	12R22.5	18	152/149	L	9.00	3550	3250	7830	7160	930	930	135	135	17.0	1085	300
•		205/85R16LT	12	117/115	L	5.50	1285	1215	2835	2680	600	600	87	87	8.5	734	203
•		205/75R17.5	14	124/122	M	6.00	1600	1500	3525	3310	750	750	110	110	13.0	753	204
•	•	215/75R17.5	16	135/133	L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
•	•	235/75R17.5	18	143/141	L	6.75	2725	2575	6005	5675	860	860	125	125	13.0	797	233
•		245/70R17.5	18	143/141	J	7.50	2725	2575	6005	5675	875	875	125	125	13.0	789	248
•		225/70R19.5	14	128/126	L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
•	•	245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	13.0	839	248
•	•	265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	13.5	867	262
•		285/70R19.5	18	150/148	K	8.25	3350	3150	7390	6945	900	900	130	130	14.0	895	283
•		255/70R22.5	16	140/137	M	7.50	2500	2300	5510	5070	830	830	120	120	12.5	930	255
•		275/70R22.5	16	148/145	M	8.25	3150	2900	6940	6395	900	900	130	130	15.0	958	276
•		275/70R22.5	18	148/145	M	8.25	3150	2900	6940	6395	900	900	130	130	15.0	958	276
•		295/60R22.5	18	150/147	L	9.00	3350	3075	7390	6780	900	900	130	130	15.0	926	292
•		295/80R22.5	18	152/149	M	9.00	3550	3250	7825	7165	900	900	130	130	16.0	1044	298
•		305/70R19.5	18	148/145	M	9.00	3150	2900	6940	6395	850	850	125	125	14.5	923	305
•		315/60R22.5	18	154/150	L	9.75	3750	3350	8270	7390	900	900	130	130	14.5	950	313
•		315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7390	900	900	130	130	15.5	1014	312
•		315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8050	850	850	125	125	16.5	1076	312
•		315/80R22.5	20	156/150(154/150)	L(M)	9.00	4000	3350	8820	7390	850	850	125	125	16.5	1076	312
•		325/95R24	22	162/160	K	9.0	4750	4500	10500	9920	850	850	125	125	15.0	1228	325

JF568

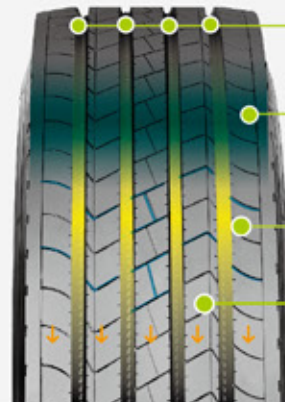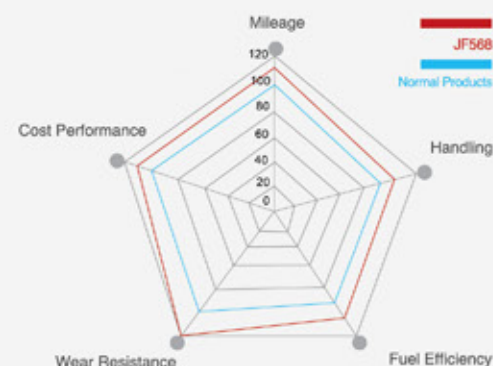

- Stability**
The tread groove design provides excellent stability and greater mileage.
- High Wear Resistance**
Special tread rubber formula offers better scrub resistance.
- Excellent Handling**
Unique groove design provides excellent handling.
- Economical and Green**
Low rolling resistance reduces fuel consumption making the tire both economical and green.



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
.		8.5R17.5	12	121/120	M	6.00	1450	1400	3195	3085	625	625	90	90	11.0	802	215
.		9.5R17.5	18	143/141	J	6.75	2725	2575	6005	5675	875	875	125	125	13.5	842	240
.		9R22.5	14	136/134	M	6.75	2240	2120	4940	4675	830	830	120	120	13.5	974	229
.		10R22.5	16	144/142	L	7.50	2800	2650	6175	5840	900	900	130	130	14.5	1020	254
.	.	11R22.5	16	148/145	M	8.25	3150	2900	6940	6395	840	840	120	120	15.0	1054	279
.		12R22.5	18	152/149	L	9.00	3550	3250	7830	7160	930	930	135	135	16.0	1085	300
.		13R22.5	18	154/151	K	9.75	3750	3450	8270	7605	830	830	120	120	17.0	1124	320
.	.	11R24.5	14	146/143	L	8.25	3000	2725	6610	6005	720	720	105	105	16.5	1104	279
.	.	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	16.5	1104	279
.	.	205/75R17.5	14	124/122	M	6.00	1600	1500	3525	3315	750	750	110	110	13.0	753	204
.	.	215/75R17.5	16	135/133	L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
.		225/80R17.5	18	123/122	L	6.75	1550	1500	3415	3305	700	700	102	102	13.5	805	226
.		225/90R17.5	14	130/128	L	6.75	1900	1800	4190	3970	760	760	110	110	13.5	851	226
.	.	235/75R17.5	18	143/141	L	6.75	2725	2575	6005	5675	860	860	125	125	13.0	797	233
.		245/70R17.5	18	134/132	L	7.50	2120	2000	4675	4410	900	900	130	130	13.0	813	250
.		225/70R19.5	14	128/126	L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
.		245/70R19.5	16	136/134	M	7.50	2240	2120	4940	4675	830	830	120	120	13.0	839	248
.		245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	13.0	839	248

Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN	VN															
•	265/70R19.5	16	140/138	M	7.50	2500	2360	5510	5205	760	760	110	110	13.5	867	262
•	265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	13.5	867	262
•	285/70R19.5	18	150/148	K	8.25	3350	3150	7390	6945	900	900	130	130	13.0	895	283
•	255/70R22.5	16	140/137	M	7.50	2500	2300	5510	5070	830	830	120	120	13.5	930	255
•	275/70R22.5	16	148/145	M	8.25	3150	2900	6945	6395	900	900	130	130	14.5	958	276
•	• 275/80R22.5	18	149/146	L	8.25	3250	3000	7160	6610	900	900	130	130	16.0	1012	276
•	295/60R22.5	18	150/147	L	9.00	3350	3075	7390	6780	900	900	130	130	14.5	926	292
•	• 295/75R22.5	14	144/141	L	9.00	2800	2575	6175	5675	760	760	110	110	16.5	1014	298
•	• 295/75R22.5	16	146/143	L	9.00	3000	2725	6610	6005	830	830	120	120	16.5	1014	298
•	295/80R22.5	18	152/149	M	9.00	3550	3250	7825	7165	900	900	130	130	16.0	1044	298
•	• 295/80R22.5	18	154/149	M	9.00	3750	3250	8270	7160	850	850	125	125	16.0	1044	298
•	315/60R22.5	18	152/148	L	9.75	3550	3150	7825	6945	900	900	130	130	14.5	950	313
•	• 315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7385	900	900	130	130	15.5	1014	312
•	315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8050	850	850	125	125	16.5	1076	312
•	• 315/80R22.5	20	156/150(154/150)	L(M)	9.00	4000	3350	8820	7390	850	850	125	125	16.5	1076	312
•	• 285/75R24.5	14	144/141	L	8.25	2800	2575	6175	5675	760	760	110	110	16.5	1050	283
•	• 285/75R24.5	16	147/144	L	8.25	3075	2800	6780	6175	830	830	120	120	16.5	1050	283
•	11.00R20	18	152/149	K	8.0	3550	3250	7830	7160	930	930	135	135	16.0	1085	293

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY522



Reduced Noise



High Durability



High Strength



Wide Section

- Ultra Wear Resistance
- Avoid Damage on Tread
- Excellent CPK
- Outstanding High Speed Performance




Suitable 




Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		11R22.5	16	146/143	L	8.25	3000	2725	6610	6010	830	830	120	120	15.5	1054	279
•		12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	16.0	1085	300
•		315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8045	850	850	125	125	16.0	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

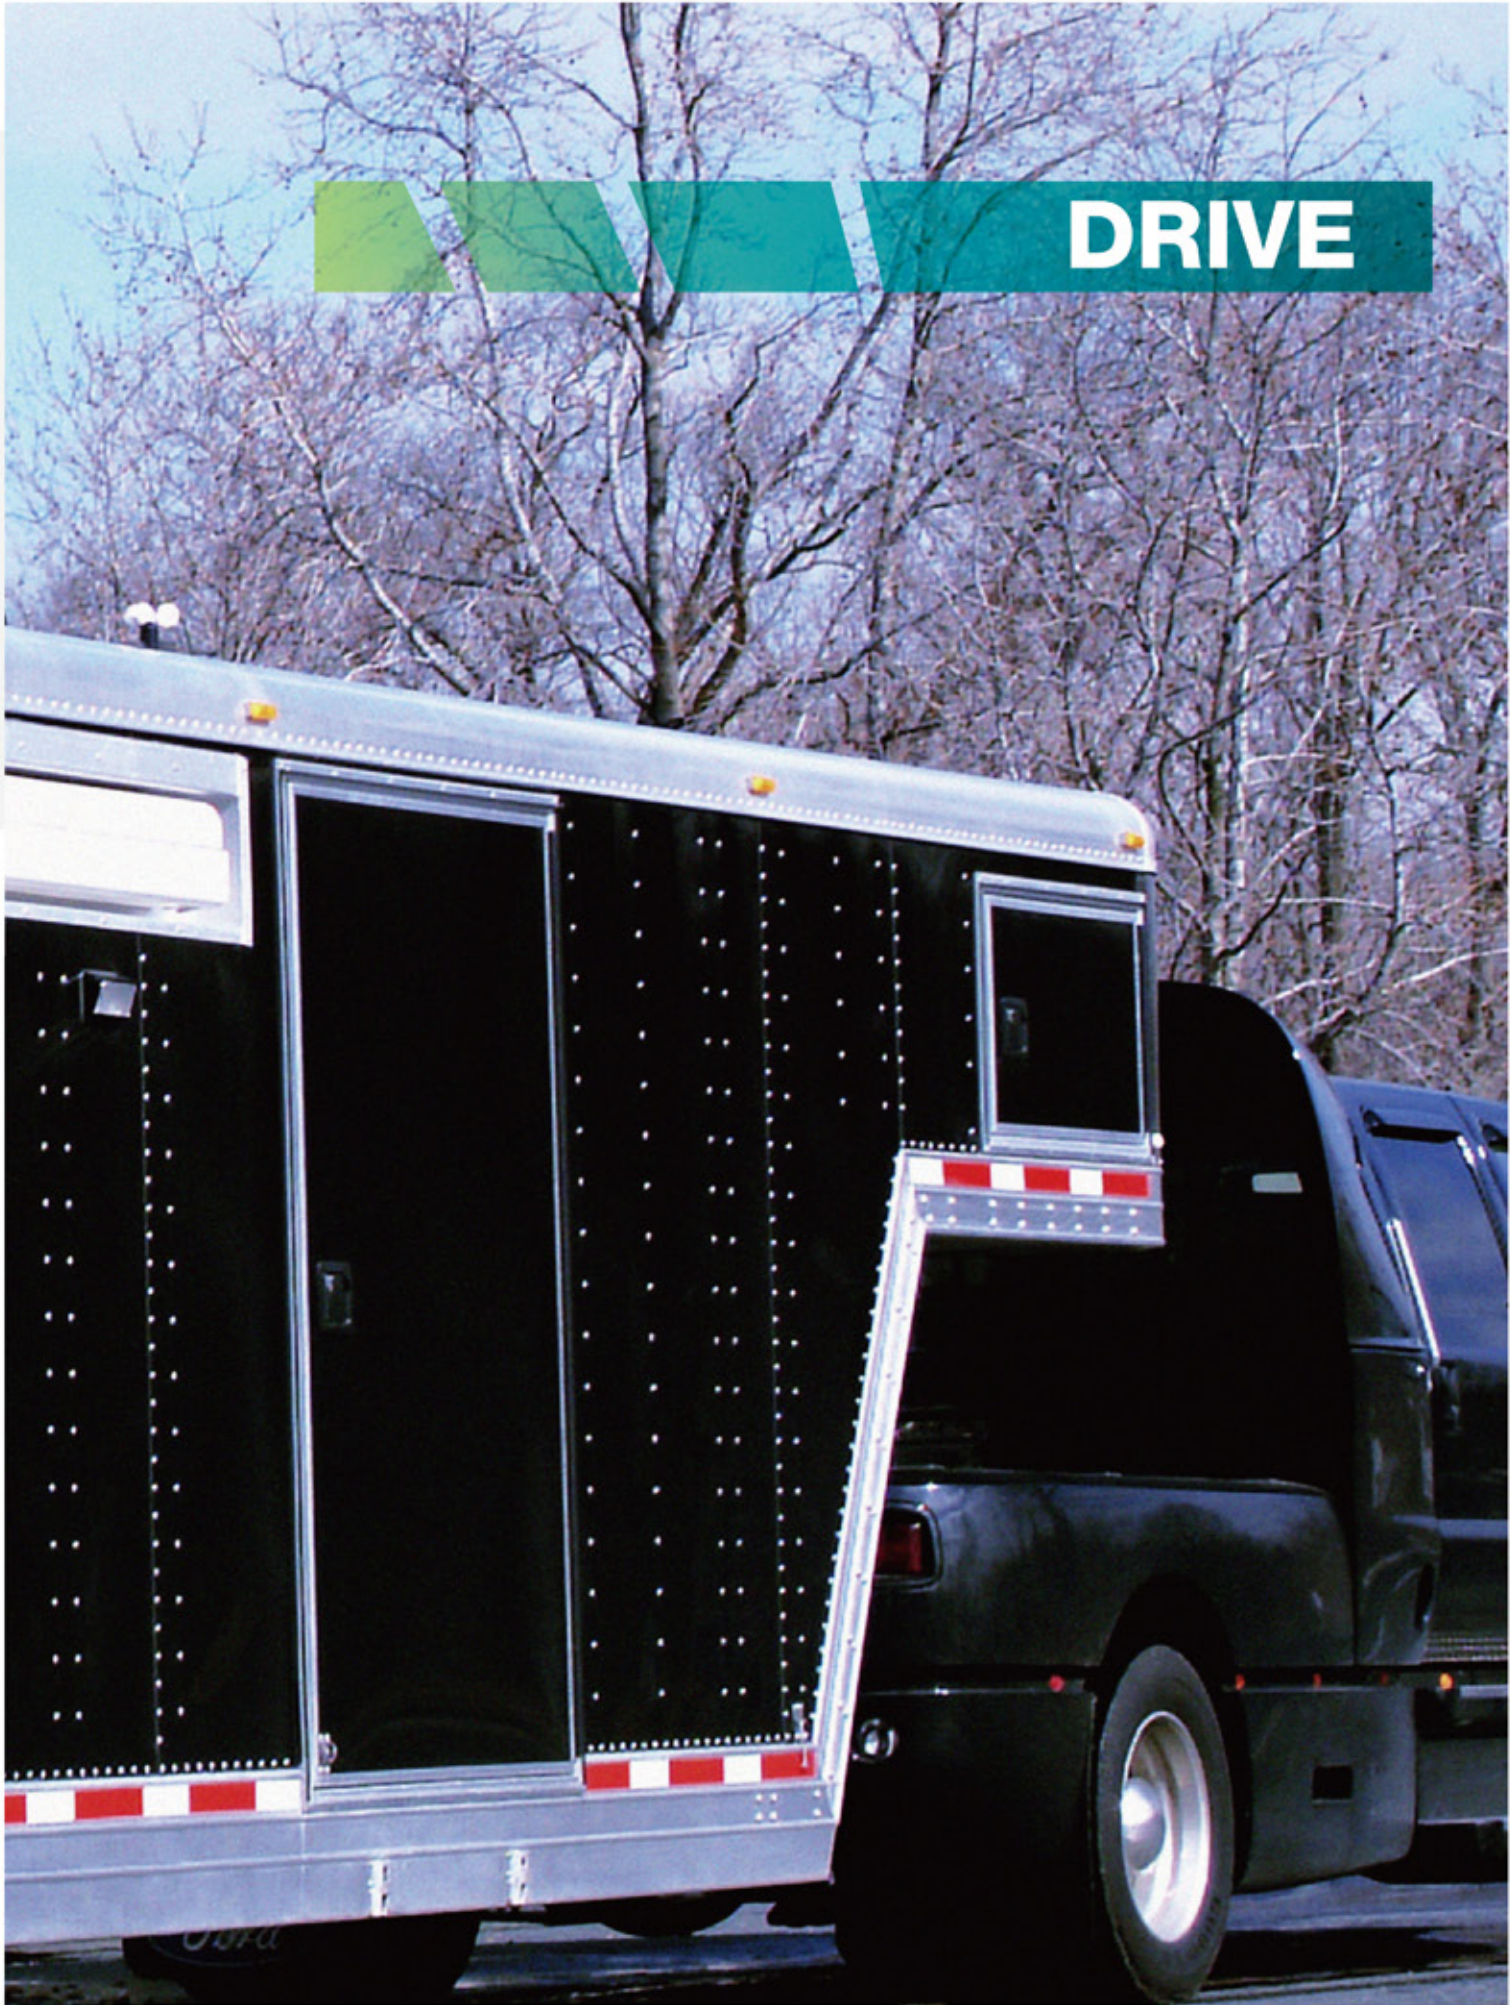

JD565

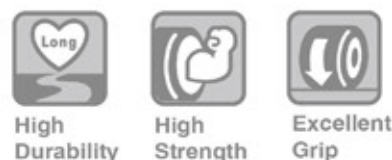


- Low Heat Generation
- High Wear Resistance
- Fuel efficiency
- Outstanding High Speed Performance

Suitable 

Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•	295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	17.0	1044	298
•	• 315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7385	900	900	130	130	18.0	1014	312
•	315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8050	850	850	125	125	18.0	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD710

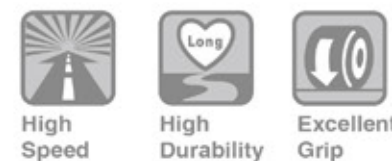


- Tear Resistance
- Excellent Stability on Handling
- Economy and Environment Friendly

Suitable 

Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN				S	D	S	D	S	D	S	D				
•	245/70R19.5	16	136/134	J	7.50	2240	2120	4940	4675	850	850	125	125	15.0	839	248
•	275/80R22.5	18	151/148	J	8.25	3450	3150	7610	6940	900	900	130	130	17.0	1012	276

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD575

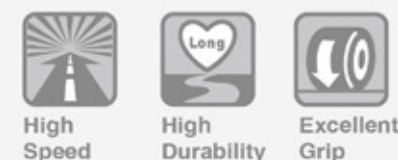

- Tear Resistance
- High Load Capacity
- Economy and Environment Friendly

Suitable 

Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•	•	205/75R17.5	14	124/122	L	6.00	1600	1500	3525	3315	750	750	110	110	15.0	753	204
•	•	215/75R17.5	16	135/133	L	6.00	2180	2060	4805	4540	860	860	125	125	15.0	767	211
•	•	235/75R17.5	18	143/141	L	6.75	2725	2575	6005	5675	860	860	125	125	15.0	797	233
•		225/70R19.5	14	128/126	L	6.75	1800	1700	3970	3750	760	760	110	110	15.0	817	226
•	•	245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	15.5	839	248
•		265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•		285/70R19.5	18	150/148	K	8.25	3350	3150	7390	6945	900	900	130	130	16.0	895	283
•		255/70R22.5	16	140/137	L	7.50	2500	2300	5510	5070	830	830	120	120	19.5	930	255
•		275/70R22.5	16	148/145	M	8.25	3150	2900	6945	6395	900	900	130	130	20.0	958	276
•	•	295/60R22.5	18	150/147	L	9.00	3350	3075	7390	6780	900	900	130	130	19.0	926	292
•	•	295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	22.0	1044	298
•	•	315/60R22.5	18	152/148	L	9.75	3550	3150	7825	6945	900	900	130	130	20.0	950	313
•	•	315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7385	900	900	130	130	20.0	1014	312
•		315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8050	850	850	125	125	22.5	1076	312
•	•	315/80R22.5	20	156/150(154/150)	L(M)	9.00	4000	3350	8820	7390	850	850	125	125	22.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY711

- 
High Speed
- 
High Durability
- 
High Strength
- 
Excellent Grip

- Tear Resistance
- Low Wear & Deep Tread
- Fuel efficiency
- High Load Capacity



Suitable 



Origin		Size	PR	LI/ SS		Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
							(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN						S	D	S	D	S	D	S	D			
•	•	11R22.5	16	148/145	L	8.25	3150	2900	6940	6395	850	850	123	123	21.5	1059	279
•	•	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	22.5	1096	300
•		13R22.5	18	154/151	K	9.75	3750	3450	8270	7605	830	830	120	120	23.5	1124	320
•	•	315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8045	850	850	125	125	24.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY958

- 
High Speed
- 
High Durability
- 
Excellent Grip

- Tear Resistance
- Excellent Stability on Handling
- Economy and Environment Friendly



Suitable 



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	11R22.5	16	146/143	K	8.25	3000	2725	6610	6010	830	830	120	120	19.5	1059	279
•	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	20.0	1096	300
•	315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8045	850	850	125	125	20.0	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD571



High Speed



High Durability



Excellent Grip

- Tear and Cut Resistance
- Adapt to Various Road Conditions

Suitable 

Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•		11R22.5	14	144/142	L	8.25	2800	2650	6175	5840	720	720	105	105	23.5	1059	279
•	•	11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	23.5	1059	279
•		11R24.5	14	146/143	L	8.25	3000	2725	6610	6005	720	720	105	105	23.5	1110	279
•	•	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1110	279
•	•	295/75R22.5	14	144/141	L	9.00	2800	2575	6175	5675	760	760	110	110	23.5	1020	298
•	•	295/75R22.5	16	146/143	L	9.00	3000	2725	6610	6005	830	830	120	120	23.5	1020	298
•	•	285/75R24.5	14	144/141	L	8.25	2800	2575	6175	5675	760	760	110	110	23.5	1056	283
•	•	285/75R24.5	16	147/144	L	8.25	3075	2800	6780	6175	830	830	120	120	23.5	1056	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD577



High Durability



High Strength



Excellent Grip

- Low Heat Generation
- High Wear Resistance
- Excellent CPK
- Superior Ride Comfort

Suitable 

Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN	VN															
•	265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•	285/70R19.5	18	150/148	K	8.25	3350	3150	7390	6945	900	900	130	130	16.0	895	283
•	275/70R22.5	16	148/145	M	8.25	3150	2900	6940	6395	900	900	130	130	18.0	958	276
•	275/80R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	22.0	1012	276
•	295/60R22.5	18	150/147	L	9.00	3350	3075	7390	6780	900	900	130	130	18.0	926	292
•	315/60R22.5	18	152/148	L	9.75	3550	3150	7825	6945	900	900	130	130	18.0	950	313
•	315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7390	900	900	130	130	19.0	1014	312
•	315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8050	850	850	125	125	20.0	1076	312
•	315/80R22.5	20	156/150(154/150)	L(M)	9.00	4000	3350	8820	7390	850	850	125	125	20.0	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD727



High
Durability



High
Strength

- Tear Resistance
- Excellent Grip
- Adapt to Various Road Conditions



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	9.5R17.5	18	143/141	M	6.75	2725	2575	6005	5675	875	875	125	125	16.5	850	240
• •	11R22.5	16	148/145	L	8.25	3150	2900	6940	6395	850	850	123	123	22.5	1059	279
•	12R22.5	18	152/149	K	9.00	3550	3250	7830	7160	930	930	135	135	20.0	1096	300
• •	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	22.5	1110	279
•	225/80R17.5	18	123/122	L	6.75	1550	1500	3415	3305	700	700	102	102	14.0	811	226
•	265/70R19.5	18	143/141	K	7.50	2725	2575	6005	5675	900	900	130	130	15.0	867	262
•	275/70R22.5	18	148/145	M	8.25	3150	2900	6940	6395	900	900	130	130	17.0	958	276
•	295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	19.5	1044	298
• •	325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	125	125	20.0	1228	325
•	10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	18.5	1065	278
•	11.00R20	18	152/149	K	8.0	3550	3250	7830	7170	930	930	135	135	19.5	1096	293
•	12.00R20	20	153/153	K	8.5	4000	3650	8820	8050	900	900	130	130	21.0	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY719



High
Durability



High
Strength

- Tear Resistance
- Excellent Grip
- Adapt to Various Road Conditions



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN	VN															
•	9.5R17.5	18	143/141	K	6.75	2725	2575	6005	5675	875	875	125	125	17.0	850	240
•	12R22.5	18	152/149	K	9.00	3550	3250	7830	7160	930	930	135	135	20.5	1096	300
•	265/70R19.5	18	143/141	K	7.50	2725	2575	6005	5675	900	900	130	130	15.0	867	262
•	315/80R22.5	20	157/154	J	9.00	4125	3750	9090	8270	900	900	130	130	19.0	1076	312
•	325/95R24	20	160/157	K	9.00	4500	4125	9920	9090	900	900	130	130	20.0	1228	325
•	7.00R16LT	14	118/114	L	5.50F	1320	1180	2910	2600	770	770	110	110	14.0	775	200
•	7.50R16LT	14	122/118	L	6.00G	1500	1320	3310	2910	770	770	110	110	15.5	815	215
•	8.25R16LT	16	128/124	L	6.50H	1800	1600	3970	3525	770	770	110	110	15.5	865	235
•	8.25R20	16	139/137	K	6.5	2430	2300	5360	5070	930	930	135	135	17.0	974	236
•	9.00R20	16	144/142	K	7.0	2800	2650	6170	5840	900	900	130	130	18.0	1030	259
•	10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	19.0	1065	278
•	11.00R20	18	152/149	K	8.0	3550	3250	7830	7170	930	930	135	135	20.0	1096	293
•	12.00R20	20	156/153	K	8.5	4000	3650	8820	8050	850	850	130	130	21.0	1136	315
•	12.00R24	20	160/157	K	8.5	4500	4125	9920	9090	900	900	130	130	20.0	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD720



High Durability



High Strength

- Tear and Cut Resistance
- Excellent Grip
- Adapt to Various Road Conditions



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•	•	11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	21.5	1059	279
•	•	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	21.5	1110	279
•		225/70R19.5	14	128/126	L	6.75	1800	1700	3970	3750	760	760	110	110	15.5	817	226
•		295/75R22.5	14	144/141	L	9.00	2800	2575	6175	5675	760	760	110	110	21.5	1014	298
•		295/75R22.5	16	146/143	L	9.00	3000	2575	6610	6005	830	830	120	120	21.5	1014	298
•		285/75R24.5	14	144/141	L	8.25	2800	2575	6175	5675	760	760	110	110	21.5	1050	283
•		285/75R24.5	16	147/144	L	8.25	3075	2800	6780	6175	830	830	120	120	21.5	1050	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD721



High Durability



High Strength

- Tear and Cut Resistance
- Excellent Grip
- Avoid Damage on Tread



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		11R22.5	16	146/143	K	8.25	3000	2725	6610	6005	830	830	120	120	24.5	1059	279
•		11R24.5	16	149/146	K	8.25	3250	3000	7160	6610	830	830	120	120	24.5	1110	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD755



High
Durability



High
Strength

- Tear and Cut Resistance
- Excellent Grip
- Anti Damage on Tread



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•	•	11R22.5	16	148/145	J	8.25	3150	2900	6945	6395	840	840	120	120	19.0	1059	279
•	•	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	20.5	1096	300
•	•	13R22.5	20	156/150	J	9.75	4000	3350	8820	7390	900	900	130	130	22.5	1124	320
•	•	13R22.5	20	156/150	K	9.75	4000	3350	8820	7390	900	900	130	130	22.5	1124	320
•	•	295/80R22.5	18	154/149	L	9.00	3750	3250	8270	7160	850	850	125	125	21.0	1012	276
•	•	315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8050	850	850	125	125	22.0	1076	312
•	•	315/80R22.5	20	156/150(154/150)	J(K)	9.00	4000	3650	8820	7390	850	850	125	125	21.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD758



High
Durability



High
Strength



Excellent
Grip

- Tear Resistance
- Good Self-Cleaning on Pattern
- Strong Constructure




Suitable 



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)		
					(kgs)		(lbs)		(kPa)		(PSI)						
					S	D	S	D	S	D	S	D					
CN	VN																
•	•	11R22.5	16	148/145	K	8.25	3150	2900	6945	6395	840	840	120	120	19.0	1059	279
•	•	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	20.0	1096	300
•	•	13R22.5	20	156/150	J	9.75	4000	3350	8820	7390	900	900	130	130	20.0	1136	320
•	•	13R22.5	20	156/150	K	9.75	4000	3350	8820	7390	900	900	130	130	20.0	1136	320
•	•	295/80R22.5	18	152/149	K	9.00	3550	3250	7825	7165	900	900	130	130	18.0	1044	298
•	•	315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8050	850	850	125	125	20.5	1076	312
•	•	315/80R22.5	20	156/150(154/150)	J(K)	9.00	4000	3350	8820	7390	850	850	125	125	20.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD660



- Tear Resistance
- Anti Impact
- High Load Capacity




Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•		13R22.5	20	156/150	K	9.75	4000	3350	8820	7390	900	900	130	130	18.0	1124	320

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD681/JD681H



- Tear Resistance
- Good Grip
- Adapt to Various Road Conditions



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•		10.00R20	16	146/143	J	7.5	3000	2725	6610	6010	830	930	120	120	18.5	1065	278
•		10.00R20	18	149/146	J	7.5	3250	3000	7165	6610	930	930	135	135	18.5	1065	278
•	•	11.00R20	18	152/149	J	8.0	3550	3250	7830	7170	930	930	135	135	19.5	1096	293
•	•	12.00R20	20	156/153	J	8.5	4000	3650	8820	8050	900	900	130	130	20.5	1136	315
•	※	12.00R20	20	156/153	J	8.5	4000	3650	8820	8050	900	900	130	130	20.5	1136	315

※ 12.00R20 applied to JD681H

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

TRAILER

JT530



Wide
Section



High
Durability

- Ultra Wear Resistance
- Excellent Stability on Handling



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
•	•	235/75R17.5	18	143/141	J	6.75	2725	2575	6005	5675	860	860	125	125	13.0	797	233
•	•	245/70R17.5	18	143/141	J	7.50	2725	2575	6005	5675	875	875	125	125	13.0	789	248
•	•	245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	13.5	839	248

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JT560



High Speed



High Durability



Wide tread and four straight groove pattern provides excellent handling, safety, and water drainage.

Wear-resistance rubber and optimised pattern design ensure longer mileage.

Optimized tire shoulder and unique notch design effectively reduce abnormal tread wear.



Suitable



Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)	(lbs)	(kPa)	(PSI)			
•	435/50R19.5 20	160	J	14.00	4500	9920	900	130	12.5	931	438
•	445/45R19.5 20	160	J	15.00	4500	9920	900	130	13.0	895	446
•	385/55R22.5 20	160	K	12.25	4500	9920	900	130	14.5	996	386
•	385/65R22.5 20	160	K	11.75	4500	9920	900	130	15.5	1072	389
•	385/65R22.5 24	164	K	11.75	5000	11000	900	130	15.5	1072	389
•	425/65R22.5 20	165	K	12.25	5150	11400	830	120	15.5	1124	422

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JT578



High Speed



Reduced Noise



High Durability



High Strength

- Outstanding Handling and Brake Performance on Wet
- Ultra Wear Resistance
- Economy and Environment Friendly
- Avoid Damage on Tread



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		11R22.5	16	148/145	M	8.25	3150	2900	6945	6395	840	840	120	120	15.0	1054	279
•		12R22.5	18	152/149	L	9.00	3550	3250	7825	7165	930	930	135	135	15.0	1085	300
•		325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	125	125	15.0	1228	325

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JT582



- Excellent Stability on Handling
- Prevent Irregular Shoulder Wear
- High Load Capacity

Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		11R22.5	14	144/142	M	8.25	2800	2650	6175	5840	720	720	105	105	9.0	1054	279
•		11R22.5	16	146/143	M	8.25	3000	2725	6610	6005	830	830	120	120	9.0	1054	279
•		11R24.5	14	146/143	M	8.25	3000	2725	6610	6005	720	720	105	105	9.0	1104	279
•		11R24.5	16	149/146	M	8.25	3250	3000	7160	6610	830	830	120	120	9.0	1104	279
•		295/75R22.5	14	144/141	M	9.00	2800	2575	6175	5675	760	760	110	110	9.0	1014	298
•		295/75R22.5	16	146/143	M	9.00	3000	2725	6610	6005	830	830	120	120	9.0	1014	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JT586



- Excellent Stability on Handling
- Prevent Irregular Shoulder Wear
- High Load Capacity


Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	15.5	1054	278
•		11.00R20	18	152/149	K	8.0	3550	3250	7830	7160	930	930	135	135	16.0	1085	293
•		12.00R20	18	154/151	K	8.5	3750	3450	8270	7610	830	830	120	120	16.5	1125	315
•		12.00R20	20	156/153	K	8.5	4000	3650	8820	8050	900	900	130	130	16.5	1125	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY598



- Ultra Wear Resistance
- Long Mileage

Suitable 



Origin		Size	PR	LI/ SS		Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN						(kgs)	(lbs)	(kPa)	(PSI)			
•		385/65R22.5	20	160	K	11.75	4500	9920	900	130	17.5	1072	389
•	•	385/65R22.5	24	164	K	11.75	5000	11000	900	130	17.5	1072	389
•	•	425/65R22.5	20	165	K	12.25	5150	11400	830	120	16.5	1124	422

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

ALL-POSITION

JA626



Reduced
Noise



High
Durability



High
Strength

- Tear Resistance
- Excellent Grip
- Adapt to Various Road Conditions



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)			
•	385/65R22.5	24	164	K	11.75	5000	11000	900	130	17.5	1072	389
•	• 425/65R22.5	20	165	K	12.25	5150	11400	830	120	17.5	1124	422
•	445/65R22.5	20	169	K	13.00	5800	12800	900	130	17.5	1150	444

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG=2.2lbs

JD690



High Durability



High Strength



Excellent Grip

- Tear and Cut Resistance
- High Stability on Handling



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN	VN															
•	7.00R16LT	14	118/114	L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	205
•	• 7.50R16LT	14	122/118	L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	815	215
•	8.25R16LT	16	128/124	L	6.50H	1800	1600	3970	3530	770	770	110	110	13.5	865	235
•	8.25R20	16	139/137	K	6.5	2430	2300	5360	5070	930	930	135	135	15.0	974	236
•	9.00R20	16	144/142	K	7.0	2800	2650	6170	5840	900	900	130	130	15.5	1030	259
•	10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	16.0	1065	278
•	• 11.00R20	18	152/149	K	8.0	3550	3250	7830	7170	930	930	135	135	17.5	1096	293
•	• 12.00R20	22	158/155	J	8.5	4250	3875	9370	8540	970	970	140	140	18.0	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA608



Reduced Noise



High Durability



High Strength

- Tear Resistance
- Reduce Stone Trapping
- High Load Capacity

Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		8.25R16LT	18	132/128	K	6.50H	2000	1800	4410	3970	870	870	126	126	15	855	235
•		275/80R22.5	18	149/146	L	8.25	3250	3000	7160	6610	900	900	130	130	16.5	1012	276

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA767



Reduced Noise



High Durability



High Strength

- Tear Resistance
- Reduce Stone Trapping
- High Load Capacity

Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN	VN															
•	215/75R17.5	16	135/133	L	6.00	2180	2060	4805	4540	860	860	125	125	15.0	767	211
•	235/75R17.5	18	143/141	L	6.75	2725	2575	6005	5675	860	860	125	125	15.0	797	233
•	• 265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15.0	867	262
•	275/70R22.5	18	148/145	K	8.25	3150	2900	6940	6395	900	900	130	130	17.0	958	276
•	275/80R22.5	18	149/146	L	8.25	3250	3000	7160	6610	900	900	130	130	18.5	1012	276
•	295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	18.0	1044	298
•	10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	15.5	1065	278
•	11.00R20	18	152/149	K	8.0	3550	3250	7830	7170	930	930	135	135	17.0	1096	293

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA621



Reduced Noise



High Durability



High Strength

- Tear Resistance
- Reduce Stone Trapping
- High Load Capacity

Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		10.00R20	18	149/146	K	7.5	3250	3000	7160	6610	930	930	135	135	16	1054	278
•		11.00R20	18	152/149	K	8.0	3550	3250	7830	7160	930	930	135	135	16.5	1085	293

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA511



Reduced Noise



High Durability



High Strength



Wide Section

- Ultra Wear Resistance
- High Load Capacity
- Long Life

Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		6.50R16LT	12	110/105	L	5.50F	1060	925	2335	2040	670	670	97	97	10.5	750	185
•		7.00R16LT	14	118/114	L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	205
•	•	7.50R16LT	14	122/118	L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	805	215
•		8.25R16LT	16	128/124	L	6.50H	1800	1600	3970	3530	770	770	110	110	13.5	855	235

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY601



Reduced Noise



High Durability

- Excellent Stability on Handling
- Adapt to Various Road Conditions

Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•	•	11R22.5	16	148/145	M	8.25	3150	2900	6945	6395	840	840	120	120	16.0	1054	279
•		12R22.5	18	152/149	K	9.00	3550	3250	7825	6945	930	930	135	135	16.5	1085	300
•		13R22.5	20	156/150	J	9.75	4000	3350	8820	7390	900	900	130	130	16.0	1124	320
•		295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	17.5	1044	298
•		315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8045	850	850	125	125	14.0	1076	312
•	•	325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	123	123	15.5	1228	325
•		7.00R16LT	14	118/114	L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	200
•	•	7.50R16LT	14	122/118	L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	805	215
•		8.25R16LT	16	128/124	L	6.50H	1800	1600	3970	3530	770	770	110	110	12.5	855	235
•		8.25R20	16	139/137	K	6.5	2430	2300	5360	5070	930	930	135	135	13.5	974	236
•		9.00R20	16	144/142	K	7.0	2800	2650	6170	5840	900	900	130	130	15.0	1019	259
•		10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	16.0	1054	278
•		11.00R20	18	152/149	K	8.0	3550	3250	7830	7170	930	930	135	135	16.5	1085	293
•		12.00R20	18	154/151	K	8.5	3750	3450	8270	7610	830	830	120	120	17.0	1125	315
•		12.00R20	20	156/153	K	8.5	4000	3650	8820	8050	900	900	130	130	17.0	1125	315
•		12.00R24	20	160/157	K	8.5	4500	4125	9925	9100	900	900	130	130	15.5	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY602



Reduced Noise



High Durability

- Tear Resistance
- Adapt to Various Road Conditions
- Excellent CPK



Suitable



Origin		Size	PR	LI/ SS	Standard	Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
							(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN						S	D	S	D	S	D	S	D			
•		315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8050	850	850	125	125	16.0	1076	312
•		6.50R16LT	12	110/105	L	5.50F	1060	925	2340	2040	670	670	97	97	10.5	750	185
•		11.00R20	18	152/149	K	8.0	3550	3250	7830	7170	930	930	135	135	17.0	1085	293
•		12.00R20	22	158/155	K	8.5	4250	3875	9370	8540	970	970	140	140	17.0	1125	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY566



Reduced Noise



High Durability



High Strength



Wide Section

- Excellent Stability on Handling
- High Load Capacity
- Chip Resistance



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN	VN															
•	11R22.5	16	146/143	L	8.25	3000	2725	6610	6010	830	830	120	120	16.0	1054	279
•	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	18.0	1085	300
•	13R22.5	18	154/151	K	9.75	3750	3450	8270	7605	830	830	120	120	18.0	1124	320
•	• 315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8050	850	850	125	125	17.0	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA525



Reduced Noise



High Durability



High Strength

- Tear and Cut Resistance
- Outstanding High Speed Performance



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•		10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	15.0	1054	278

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA526



High Speed



High Durability

- Tear and Cut Resistance
- Anti Impact
- High Load Capacity



Suitable 



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN	VN															
•	325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	125	125	16.0	1228	325
•	12.00R24	20	160/157	K	8.5	4500	4125	9920	9090	900	900	130	130	16.0	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA661



- Tear and Cut Resistance
- Excellent Grip
- Avoid Damage on Tread



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•	•	325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	123	123	15.5	1228	325

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA665



- Ultra Wear Resistance
- High Stability on Handling
- High Load Capacity




Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	11R22.5	16	148/145	L	8.25	3150	2900	6940	6395	850	850	123	123	17.5	1054	279
• •	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	18.0	1085	300
• •	13R22.5	20	156/150	L	9.75	4000	3350	8820	7390	900	900	130	130	18.0	1124	320
•	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	17.5	1104	279
•	295/80R22.5	18	152/149	K	9.00	3550	3250	7825	7165	900	900	130	130	18.5	1044	298
• •	315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8050	850	850	125	125	17.0	1076	312
•	315/80R22.5	20	161/157	K	9.00	4625	4125	10200	9090	900	900	130	130	17.0	1076	312
•	315/80R22.5	20	156/150(154/150)	L(M)	9.00	4000	3350	8820	7390	850	850	125	125	17.0	1076	312
•	12.00R24	20	160/157	K	8.5	4500	4125	9920	9090	900	900	130	130	14.5	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA906

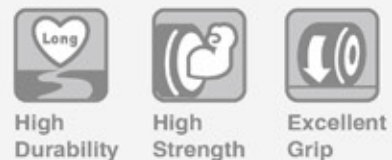

- Ultra Wear Resistance
- Avoid Damage on Tread
- High Stability on Handling



Suitable 



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	16.5	1054	278
•	11.00R20	18	152/149	K	8.0	3550	3250	7830	7170	930	930	135	135	16.5	1085	293
•	12.00R20	20	156/153	K	8.5	4000	3650	8820	8050	900	900	130	130	16.5	1125	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG~2.2lbs

JD762



- Tear and Cut Resistance
- Anti Impact
- Adapt to Various Road Conditions
- Good Self-Cleaning on Pattern



Suitable 



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	9.00R20	18	146/144	J	7.0	3000	2800	6610	6175	970	970	140	140	21.5	1030	259
•	12.00R20	20	156/153	G	8.5	4000	3650	8820	8050	900	900	130	130	24.0	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG~2.2lbs



JD786



- Tear and Cut Resistance
- Anti Impact
- Excellent Grip
- High Load Capacity



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
						S	D	S	D	S	D	S	D				
CN	VN																
•		12.00R20	20	156/153	D	8.5	4000	3650	8820	8050	900	900	130	130	23.0	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD703



- Tear and Cut Resistance
- Anti Impact
- Excellent Grip



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN VN																
•	12.00R20	20	156/153	D	8.5	4000	3650	8820	8050	900	900	130	130	30.0	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD756



High Durability



High Strength

- Cut Resistance
- Excellent Grip
- Avoid Damage on Tread



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
.		11R22.5	16	148/145	G	8.25	3150	2900	6940	6395	850	850	123	123	24.0	1065	279
.		12R22.5	18	152/149	G	9.00	3550	3250	7830	7160	930	930	135	135	23.5	1096	300
.		13R22.5	18	156/150	G	9.75	4000	3350	8820	7385	900	900	130	130	23.5	1136	320
.		13R22.5	20	156/150	G	9.75	4000	3350	8820	7385	900	900	130	130	23.5	1136	320
.		11R24.5	16	149/146	G	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1116	279
.	.	295/80R22.5	18	152/149	J	9.00	3550	3250	7825	7165	900	900	130	130	24.0	1044	298
.		315/80R22.5	20	157/154	G	9.00	4125	3750	9090	8270	900	900	130	130	24.0	1076	312
.		12.00R20	20	156/153	J	8.5	4000	3650	8820	8050	900	900	130	130	23.5	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD766



High Durability



High Strength

- Excellent Grip
- Anti Damage on Tread
- High Load Capacity

Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN/VN																
•	12.00R24	20	160/157	F	8.5	4500	4125	9920	9090	900	900	130	130	31.0	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD776



High Durability



High Strength

- Excellent Grip
- Anti Damage on Tread
- High Load Capacity

Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN/VN																
•	12.00R24	20	160/157	F	8.5	4500	4125	9920	9090	900	900	130	130	31.0	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD785



High Durability



High Strength

- Tear and Cut Resistance
- Anti Impact
- Adapt to Various Road Conditions
- Good Self-Cleaning on Pattern



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
.		7.50R16LT	14	122/118	D	6.00G	1500	1320	3310	2910	770	770	110	110	18.5	815	215
.		8.25R16LT	18	128/124	D	6.50H	1800	1600	3970	3530	770	770	110	110	20.5	865	235
.		8.25R20	16	139/137	D	6.5	2430	2300	5360	5070	930	930	135	135	20.0	974	236
.		9.00R20	18	144/142	D	7.0	2800	2650	6170	5840	900	900	130	130	22.0	1030	259
.		10.00R20	20	149/146	D	7.5	3250	3000	7165	6610	930	930	135	135	23.5	1065	278
.		11.00R20	18	152/149	D	8.0	3550	3250	7830	7170	930	930	135	135	24.0	1096	293
.	.	12.00R20	22	158/155	D	8.5	4250	3875	9370	8540	970	970	140	140	24.0	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY716



High Durability



High Strength

- Tear and Cut Resistance
- Strong Constructure
- Excellent Grip



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		13R22.5	20	156/150	J	9.75	4000	3350	8820	7390	900	900	130	130	21.0	1124	320
•		10.00R20	18	149/146	K	7.5	3250	3000	7165	6610	930	930	135	135	21.0	1065	278
•		11.00R20	18	152/149	K	8.0	3550	3250	7830	7160	930	930	135	135	21.0	1096	293
•		12.00R20	22	158/155	D	8.5	4250	3875	9370	8540	970	970	140	140	21.0	1136	315
•		12.00R24	20	160/157	K	8.5	4500	4125	9920	9090	900	900	130	130	21.5	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



COACH

COACH



Reduced Noise



High Durability



High Strength

- Outstanding Handling and Brake Performance on Wet
- Ultra Wear Resistance
- Superior Ride Comfort
- Lower Fuel Consumption

Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN	VN															
•	295/80R22.5	18	152/149	M	9.00	3550	3250	7830	7160	900	900	130	130	15.0	1044	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JF518pro



High Speed



Reduced Noise



High Durability



High Strength

- Excellent Stability on Handling
- Outstanding High Speed Performance
- Low Heat Generation
- High Wear Resistance
- Superior Ride Comfort

Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
CN/ VN						S	D	S	D	S	D	S	D			
•	12R22.5	18	152/149	L	9.00	3550	3250	7830	7160	930	930	135	135	17.0	1085	300
•	295/80R22.5	18	154/149	M	9.00	3750	3250	8270	7160	850	850	125	125	17.0	1044	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY529



Reduced Noise



High Durability



High Strength

- Ultra Wear Resistance
- Outstanding High Speed Performance
- Superior Ride Comfort



Suitable 




Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN VN																
•	295/80R22.5	18	152/148	M	9.00	3550	3150	7825	6945	850	850	125	125	15.0	1044	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



JU555

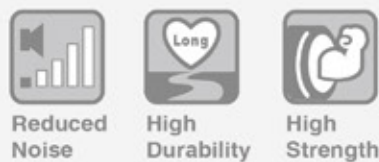

- Ultra Wear Resistance
- Damage Resistance On Sidewall
- Outstanding High Speed Performance




Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		11R22.5	16	148/145	J	8.25	3150	2900	6940	6395	850	850	123	123	20.0	1054	279
•	•	11R22.5	18	148/145	J	8.25	3150	2900	6940	6395	850	850	123	123	20.0	1054	279
•		245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	17.5	839	248
•		255/70R22.5	18	144/142	J	7.50	2800	2650	6175	5840	850	850	123	123	18.5	930	255
•	•	275/70R22.5	18	152/148	J	8.25	3550	3150	7830	6940	900	900	130	130	20.5	958	276
•		305/70R22.5	18	152/150	J	9.00	3550	3350	7830	7390	900	900	130	130	20.5	1000	305
•		305/70R22.5	20	153/150	J	9.00	3650	3350	8050	7390	900	900	130	130	20.5	1000	305

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JU551

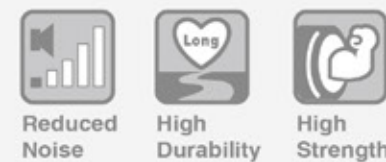

- Excellent Grip
- Adapt to Various Road Conditions



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)			
					(kgs)		(lbs)		(kPa)		(PSI)							
					S	D	S	D	S	D	S	D						
CN	VN	•	11R22.5	16	148/145	L	8.25	3150	2900	6940	6395	850	850	123	123	20.5	1054	279
•	275/70R22.5	18	148/145	J	8.25	3150	2900	6940	6395	900	900	130	130	22.0	958	276		

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JU558



Reduced Noise



High Durability



High Strength

- Ultra Wear Resistance
- Damage Resistance On Sidewall



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN VN						S	D	S	D	S	D	S	D			
•	10R22.5	16	144/142	L	7.50	2800	2650	6175	5840	900	900	130	130	16.5	1020	254

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



JW590



High Durability



Excellent Grip

- Excellent Low-temperature Performance
- Superior Traction on Snow
- Anti Damage on Tread



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•		11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	20.0	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JW591



High Durability



Excellent Grip

- Excellent Low-temperature Performance
- Excellent CPK



Suitable



Origin		Size	PR	LI/ SS		Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
							(kgs)		(lbs)		(kPa)		(PSI)				
							S	D	S	D	S	D	S	D			
CN	VN	11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	20.0	1054	279
•		225/80R17.5	14	123/122	L	6.75	1550	1500	3415	3305	700	700	102	102	16.0	811	226
•		245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	19.0	839	248
•		265/70R19.5	16	140/138	L	7.50	2500	2360	5510	5205	760	760	110	110	20.0	867	262
•		275/80R22.5	18	151/148	J	8.25	3450	3150	7160	6940	900	900	130	130	19.0	1012	276

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JW592



High Durability



Excellent Grip

- Excellent Low-temperature Performance
- Excellent Stability on Handling
- Superior Traction on Snow



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•	275/70R22.5	16	148/145	L	8.25	3150	2900	6940	6395	900	900	130	130	20.5	958	276
•	295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	22.0	1044	298
•	315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7385	900	900	130	130	20.5	1014	312
•	315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8050	850	850	125	125	20.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JW593



High Durability



Excellent Grip

- Outstanding Handling and Brake Performance on Wet
- Excellent Low-temperature Performance
- Superior Traction on Snow



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)	(lbs)	(kPa)	(PSI)				
CN VN	385/65R22.5	24	164	K	11.75	5000	11000	900	130	15.0	1072	389

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JW595



High Durability



Excellent Grip

- Good performance and wearresistence in low temperture
- Aggressive tread block provides good driving and stability
- Extended mileage andcorss-season use



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
CN	VN															
•	11R22.5	16	146/143	M	8.25	3000	2725	6610	6005	830	830	120	120	20.5	1054	279
•	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	20.5	1116	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs