

WOSEN

SHANDONG WOSEN RUBBER CO.,LTD.

Add: DONGYING CITY ,SHANDONG PROVINCE,PRC:257335

Tel: +86 532-68721258

E-mail: Info@wosentires.com

[Http://www.wosentires.com](http://www.wosentires.com)

WOSEN

Truck and Bus Tire Catalog



WOSEN 沃森

COMPANY PROFILE


Shandong Wosen Rubber Co., Ltd. located in Dawang economic development zone of Shandong province, established in 2003, the company is mainly engaged in the production and management of PCR tires, TBR tires, OTR tires with well-equipment and strong technical force.

Wosen covers an area of 1 million square meters and currently has three major production areas. Fully-equipped with strong technical force, the company now have more than 600 sets of large and medium-sized equipment and more than 3000 employees, including more than 100 engineers. TBR plant with annual production capacity of 3 million tires, PCR plant with annual production capacity of 12 million tires, OTR plant with annual production capacity of 1 million tires, and we also produce industrial tire and solid forklift tire.

Wosen takes pride in its experience R&D team and advanced testing facilities, which assure the excellent and stable quality of its products. Those products have built a strong quality assurance system and its products are accredited with certificates of ISO9001, ISO14001, OHSAS18001, ISO/TS16949, ISO/IEC17025, DOT, ECE, GCC, INMETRO, CCC, etc.

Wosen Tires, enjoying high popularity in the domestic and international market with excellent performance, is one of the major brands which are well-reputed all over the world such as Australia, the U.S.A., Europe, Southeast Asia and etc.


We sincerely welcome domestic and foreign new and old customers to visit our factory and build a long-term win-win partnership!

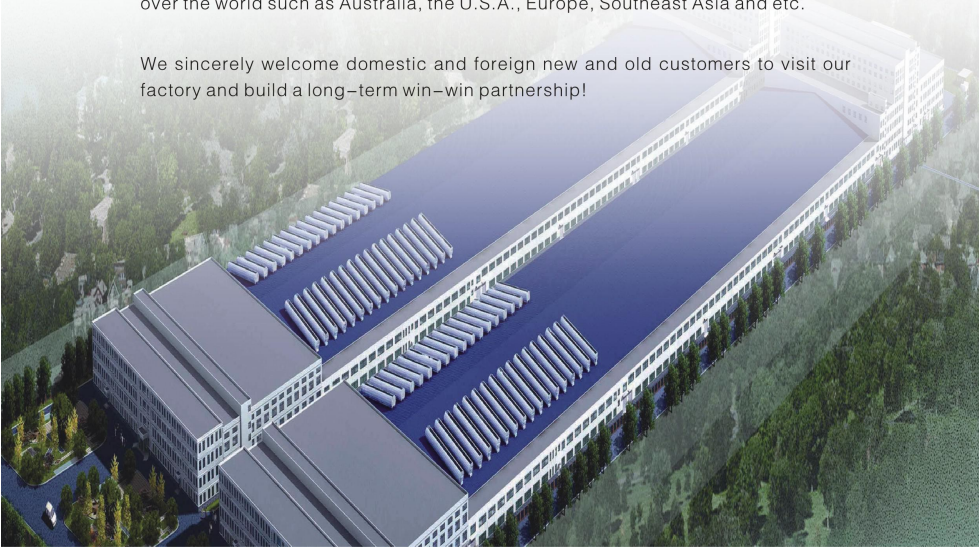

WOSEN



QUALIFICATIONS

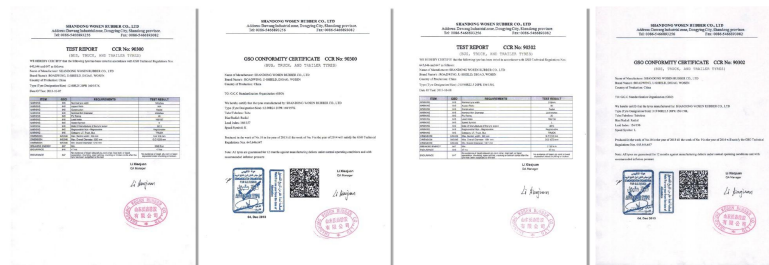

GCC-001

GCC-002

GCC-003

GCC-004



CCC-1

CCC-2

CCC-3

CCC-4



CNAS

质量管理体系认证证书

质量管理体系认证证书

PCI

STEER AND TAILER



11.00R20-18



11R22.5-16
11R24.5-18
12R22.5-18
13R22.5-18



11R22.5-16
11R24.5-18



295/80R22.5-18



11.00R20-18



11R22.5-16
12R22.5-18
295/80R22.5-18
315/80R22.5-20
315/70R22.5-20



12R22.5-18

DRIVE



10.00R20-18
12.00R20-20



12.00R20-20



9.00R20-16
10.00R20-18
11.00R20-18



12.00R20-20



10.00R20-18
11.00R20-18



7.00R16-14
7.50R16-14
8.25R16-16
9.00R20-16
10.00R20-18
11.00R20-18
12.00R20-20



10.00R20-18
11.00R20-18



12.00R24-20

ALL POSITION



11R22.5-16
11R24.5-18
12R22.5-18
13R22.5-18

WS800 P9



11R22.5-16
12R22.5-18

WS808 P9



12R22.5-18

WS818 P10



13R22.5-18
315/80R22.5-20

WS836 P10



11R22.5-16
12R22.5-18
295/80R22.5-18

WS806 P11



295/80R22.5-18
315/70R22.5-20
315/80R22.5-20

WS816 P11



11R22.5-16
12.00R24-20

WS826 P12



7.00R16-14
7.50R16-14
8.25R16-16
8.25R20-16
9.00R20-16
10.00R20-18
11.00R20-18


WS118 P13

12.00R20-20
12.00R24-20
11R22.5-16
12R22.5-18
13R22.5-18
315/80R22.5-20



10.00R20-18
11.00R20-18
12.00R20-20
12.00R24-20

WS128 P14



12.00R24-20

WS188 P14



11.00R20-18
12.00R20-20
11R22.5-16
12R22.5-18
315/80R22.5-20

WS138 P15



315/80R22.5-20
12.00R24-20

WS689 P15

OFF THE ROAD



WS618 P16

11.00R20-18
12.00R20-20



WS636 P16

7.50R16-14
8.25R16-16
9.00R20-16
10.00R20-18
11.00R20-18
12.00R20-20



WS698 P17

11.00R20-18
12.00R20-20



WS628 P17

11.00R20-18
12.00R20-20
295/80R22.5-18



WS658 P18

10.00R20-18
11.00R20-18
12.00R20-20

TRAILER



WS766 P19

385/65R22.5-20



WS767 P19

385/65R22.5-20

STEER AND TAILER



WS158

Features

- Superior in wearing resistance and anti-irregular wear performance
- Good heat dispersion performance
- Anti-pinch stone, good anti-impact resistance
- Excellent in high speed stability performance

Applications:

- Suitable for long-distance highways

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11.00R20	18	152/149	K	16.5	TT	8.00	3550/3250	930/930



WS713

Features

- Green tire with low rolling resistance is used to driving wheels
- Reduce oil consumption-oil efficiency by lowering rolling resistance
- The pattern has superior water-drained and ground adhesion performance

Applications:

- Suitable for long-distance highways

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11R22.5	16	146/143	M	14.5	TL	8.25	3000/2725	830/830
11R24.5	18	149/146	M	15	TL	8.25	3250/3000	830/830



WS711

Features

- Superior in wearing resistance and anti-irregular wear performance
- Good heat dispersion performance
- Anti-pinch stone, good anti-impact resistance
- Excellent in high speed stability performance

Applications:

- Suitable for long-distance highways

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11R22.5	16	146/143	M	15	TL	8.25	3000/2725	830/830
12R22.5	18	152/149	M	15.5	TL	9.00	3550/3250	930/930
11R24.5	18	149/146	K	15	TL	8.25	3250/3000	830/830
13R22.5	18	154/151	M	15.5	TL	9.75	3750/3450	830/830



WS788

Features

- Excellent straight driving stability performance
- Low noise tread design anti-side-skid performance
- Improved anti-side wearing capacity
- Wide section design, excellent road adhesion ability.

Applications:

- Suitable for long-distance highways

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
295/80R22.5	18	152/149	M	15	TL	9.00	3550/3250	900/900

**WS168****Features**

- Excellence in high speed driving performance
- Excellence in anti-wearing performance
- Better protection for tyres

Applications:

- Suitable for long-distance highways

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11.00R20	18	152/149	K	16.5	TT	8.00	3550/3250	930/930

**WS718****Features**

- Superior in wearing resistance and anti-irregular wear performance
- Good heat dispersion performance
- Anti-pinch stone, good anti-impact resistance
- Excellent in high speed stability performance

Applications:

- Suitable for the expressway and ordinary road condition.

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
12R22.5	18	144/142	K	15.5	TL	7.00	2800/2650	900/900

**WS712****Features**

- Superior in wearing resistance and anti-irregular wear performance
- Good heat dispersion performance
- Anti-pinch stone, good anti-impact resistance
- Excellent in high speed stability performance

Applications:

- Suitable for the expressway and ordinary road condition.

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11R22.5	16	146/143	M	15	TL	8.25	3000/2725	830/830
12R22.5	18	152/149	M	15	TL	9.00	3550/3250	930/930
295/80R22.5	18	152/149	M	15	TL	9.00	3550/3250	900/900
315/70R22.5	20	154/150	M*	14.5	TL			
315/80R22.5	20	156/150	L	15	TL	9.00	4000/3350	850/850



W6316

Features

- Superior driving and braking performance
- Excellent resistance to wear and tear
- Good load carrying capacity

Applications:

- Suitable for highways and general-class roads.

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
10.00R20	18	149/146	K	16.5	TT	7.50	3250/3000	930/930
12.00R20	20	156/153	D	18.5	TT	8.50	4000/3650	900/900



W638

Features

- Outstanding in anti-side and anti-irregular wear performance
- Excellent in stable comfortable and safe driving
- Good heat dispersion performance

Applications:

- Suitable for bad or common level highway in medium and short distance driving

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
12.00R20	20	156/153	L	19	TT	8.50	4000/3650	900/900



W666

Features

- High saturation pattern with deep groove pattern in design, which is superior in wearing resistance; big blocks in transverse pattern is superior in cutting resistance
- Optimizing pattern design for better durability and bearing performance.

Applications:

- Suitable to medium and short distance driving, mixed road surface and second-class road.

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
9.00R20	16	144/142	K	15.5	TT	7.00	2800/2650	900/900
10.00R20	18	149/146	K	16.5	TT	7.50	3250/3000	930/930
11.00R20	18	152/149	K	19	TT	8.00	3550/3250	930/930



W678

Features

- Outstanding in anti-side and anti-irregular wear performance
- Excellent in stable comfortable and safe driving
- Good heat dispersion performance

Applications:

- Suitable for bad or common level highway in medium and short distance driving.

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
12.00R20	20	156/153	D	21.5	TT	8.50	4000/3650	900/900



Features

- Superior driving and braking performance
- Excellent resistance to wear and tear
- Good load carrying capacity

Applications:

- Suitable for highways and general-class roads.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
10.00R20	18	149/146	K	15	TT	7.50	3250/3000	930/930
11.00R20	18	152/149	D	15.5	TT	8.00	3550/3250	900/900



Features

- Outstanding in anti-side and anti-irregular wear performance
- Excellent in stable comfortable and safe driving
- Good heat dispersion performance

Applications:

- Suitable for bad or common level highway in medium and short distance driving



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
10.00R20	18	149/146	K	16.5	TT	7.50	3250/3000	930/930
11.00R20	18	152/149	K*	17.5	TT	8.00	3550/3250	930/930



Features

- Outstanding in anti-side and anti-irregular wear performance
- Excellent in stable comfortable and safe driving
- Good heat dispersion performance

Applications:

- Suitable for bad or common level highway in medium and short distance driving



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
7.50R16	14	122/118	L	15	TT	6.00G	1500/1320	770/770
8.25R16	16	128/124	k	15.5	TT	6.50H	1800/1600	770/770
9.00R20	16	144/142	k	17.5	TT	7.00	2800/2650	900/900
10.00R20	18	149/146	k	19	TT	7.50	3250/3000	930/930
11.00R20	18	152/149	k	19.5	TT	8.00	3550/3250	930/930
12.00R20	20	156/153	k*	21.5	TT	8.50	4000/3650	900/900



Features

- Outstanding in anti-side skid and anti-irregular wear performance
- Excellent in stable comfortable and safe driving
- Good heat dispersion performance

Applications:

- Suitable for bad or common level highway in medium and short distance driving.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
12.00R24	20	160/157	K	21	TT	8.50	4500/4125	900/900



WS800

Features

- Superior driving and braking performance
- Excellent in tearing resistance
- Superior ground adhesion performance
- Good anti-impact and heat dispersion performance

Applications:

- Suitable for bad or common level highway in medium and short distance driving.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11R22.5	16	146/143	M	18.5	TL	8.25	3000/2725	830/830
12R22.5	18	152/149	M	19	TL	9.00	3550/3250	930/930
11R24.5	18	149/146	K	18.5	TL	8.25	3250/3000	830/830
13R22.5	18	154/151	M	18	TL	9.75	3750/3450	830/830



WS818

Features

- Superior driving and braking performance
- Excellent in tearing resistance
- Superior ground adhesion performance
- Good anti-impact and heat dispersion performance

Applications:

- Suitable for bad or common level highway in medium and short distance driving.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
12R22.5	18	152/149	K	15.5	TL	7.00	2800/2650	900/900



WS808

Features

- Excellent straight driving stability performance
- Excellent tractive performance
- Superior in braking and wet-skid resistance

Applications:

- Suitable to medium and long-distance driving, high speed on the well road.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11R22.5	16	146/143	M	17.5	TL	8.25	3000/2725	830/830
12R22.5	18	152/149	M	18	TL	9.00	3550/3250	930/930



WS836

Features

- Superior in braking and driving performance
- High wear resistance
- Super adhesion performance
- Good loading capacity.

Applications:

- Suitable for bad or common level highway in medium and short distance driving.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
315/80R22.5	20	156/150	L	20	TL	9.00	4000/3350	850/850



Features

- Superior driving and braking performance
- Excellent in tearing resistance
- Superior ground adhesion performance
- Good anti-impact and heat dispersion performance

Applications:

- Suitable for bad or common level highway in medium and short distance driving.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11R22.5	16	146/143	M	19.5	TL	8.25	3000/2725	830/830
12R22.5	18	152/149	M	19.5	TL	9.00	3550/3250	930/930
295/80R22.5	18	152/149			TL	9.00	3550/3250	900/900



Features

- Superior in braking and driving performance
- High wear resistance
- Super adhesion performance
- Good loading capacity

Applications:

- Suitable for bad or common level highway in medium and short distance driving.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11R22.5	16	146/143	M	22.5	TL	8.25	3000/2725	830/830
12.00R24	20	160/157	K*	24	TL	8.50	4500/4125	900/900



Features

- Superior in braking and driving performance
- High wear resistance
- Super adhesion performance
- Good loading capacity.

Applications:

- Suitable for bad or common level highway in medium and short distance driving.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
295/80R22.5	18	152/149	M	19.5	TL	9.00	3550/3250	900/900
315/70R22.5	20	154/150	L*	19.5	TL	9.00	3750/3350	900/900
315/80R22.5	20	156/150	L	19.5	TL	9.00	4000/3350	850/850

ALL POSITION



W118

Features

- Superior driving and braking performance
- Excellent resistance to wear and tear
- Good load carrying capacity.

Applications:

- Suitable for highways and general-class roads.

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
7.00R16	14	118/114	L	12	TT	5.50F	1320/1180	770/770
7.50R16	14	122/118	L	12	TT	6.00G	1500/1320	770/770
8.25R16	16	128/124	L	14	TT	6.50H	1800/1600	770/770
8.25R20	16	139/137	K	14	TT	6.50	2430/2300	930/930
9.00R20	16	144/142	K	15.5	TT	7.00	2800/2650	900/900
10.00R20	18	149/146	K	16	TT	7.50	3250/3000	930/930
11.00R20	18	152/149	K	17	TT	8.00	3550/3250	930/930
12.00R20	20	156/153	K	17.5	TT	8.50	4000/3650	900/900
12.00R24	20	160/157	M	16	TT	8.50	4500/4125	900/900
11R22.5	16	146/143	M	15	TL	8.25	3000/2725	830/830
12R22.5	18	152/149	M	16	TL	9.00	3550/3250	930/930
13R22.5	18	154/151	M	16	TL	9.75	3750/3450	830/830
315/80R22.5	20	156/150	K	16	TL	9.00	4000/3350	850/830



WS128

Features

- Superior driving and braking performance
- Excellent in tearing resistance
- Superior ground adhesion performance
- Good anti-impact and heat dispersion performance

Applications:

- Suitable for highways and general-class roads.



WS188

Features

- Superior driving and braking performance
- Excellent in tearing resistance
- Superior ground adhesion performance
- Good anti-impact and heat dispersion performance

Applications:

- Suitable for highways and general-class roads.

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
12.00R24	20	160/157	K	16	TT	8.50	4500/4125	900/900



Features

- Superior in braking and driving performance
- High wear resistance
- Super adhesion performance
- Good loading capacity.

Applications:

- Suitable for bad or common level highway in medium and short distance driving.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11.00R20	18	152/149	K	20	TT	8.00	3550/3250	930/930
12.00R20	20	156/153	M	21	TT	8.50	4000/3650	900/900
11R22.5	16	146/143	M	16	TL	8.25	3000/2725	830/830
12R22.5	18	152/149	M	16	TL	9.00	3550/3250	930/930
315/80R22.5	20	156/150	K	16	TL	9.00	4000/3350	850/850



Features

- Excellent straight driving stability performance
- Excellent tractive performance
- Superior in braking and wet-skid resistance

Applications:

- Suitable to medium and long-distance driving, high speed on the well road.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
315/80R22.5	20	156/150	K*	16	TL	9.00	4000/3350	850/850
12.00R24	20	160/157	K*	16	TT	8.50	4500/4125	900/900

OFF THE ROAD



Features

- Latreal pattern with big blocks, wide driving surface
- Excellent in tearing resistance and punctures
- Superior adhesion performance, strong bearing capacity

Applications:

- Suitable for rough road condition such as coalmine, mountainous region and common level highway.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11.00R20	18	152/149	D	23.5	TT	8.00	3550/3250	930/930
12.00R20	20	156/153	K	24.5	TT	8.50	4000/3650	900/900



Features

- Latreal pattern with big blocks, wide driving surface
- Excellent in tearing resistance and punctures
- Superior adhesion performance, strong bearing capacity

Applications:

- Suitable for rough road condition such as coalmine, mountainous region and common level highway.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
7.50R16	14	144/142	K	15.5	TT	7.00	2800/2650	900/900
8.25R16	16	149/146	K	16.5	TT	7.50	3250/3000	930/930
9.00R20	16	152/149	D	19	TT	8.00	3550/3250	930/930
10.00R20	18	149/146	D	22.5	TT	7.50	3250/3000	930/930
11.00R20	18	152/149	D	23.5	TT	8.00	3550/3250	930/930
12.00R20	20	156/153	K	24.5	TT	8.50	4000/3650	900/900



WS698

Features

- Heavy tread blocks, ultra deep tread design, to provide a strong driving force
- Strong adhesion, tire using structure, with excellent bearing capacity high running life, resistance to puncture.

Applications:

- Suitable for mining or mountain road.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11.00R20	18	152/149	D	23.5	TT	8.00	3550/3250	930/930
12.00R20	20	156/153	L	24.5	TT	8.50	4000/3650	900/900



WS658

Features

- Heavy tread blocks, ultra deep tread design, to provide a strong driving force
- Strong adhesion, tire using structure, with excellent bearing capacity high running life, resistance to puncture.

Applications:

- Suitable for mining or mountain road.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
10.00R20	18	149/146	D	22.5	TT	7.50	3250/3000	930/930
11.00R20	18	152/149	D	23.5	TT	8.00	3550/3250	930/930
12.00R20	20	156/153	D	24.5	TT	8.50	4000/3650	900/900



WS628

Features

- Latreal pattern with big blocks, wide driving surface
- Excellent in tearing resistance and punctures
- Superior adhesion performance, strong bearing capacity

Applications:

- Suitable for rough road condition such as coalmine, mountainous region and common level highway.



SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
11.00R20	18	152/149	D	23.5	TT	8.00	3550/3250	930/930
12.00R20	20	156/153	M	24.5	TT	8.50	4000/3650	900/900
295/80R22.5	18	152/149	K	21	TL	9.00	3550/3250	900/900

TRAILER

Technical File



WS766

Features

- Unique tread belt structure
- High wear resistance
- Excellent anti-impact force optimized and reinforced tired bead design

Applications:

- Excellent taction performance ,Suitable for the expressway and ordinary road conditions.

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
385/65R22.5	20	160	K	16	TL	11.75	4500	900



WS767

Features

- Unique tread belt structure
- High wear resistance
- Excellent anti-impact force optimized and reinforced tired bead design

Applications:

- Excellent taction performance ,Suitable for the expressway and ordinary road conditions.

SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
385/65R22.5	20	144/142	K	15.5	TL	7.00	2800/2650	900/900

PATTER	SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
WS118	7.00R16	14	118/114	L	12	TT	5.50F	1320/1180	770/770
	7.50R16	14	122/118	L	12	TT	6.00G	1500/1320	770/770
	8.25R16	16	128/124	L	14	TT	6.50H	1800/1600	770/770
	8.25R20	16	139/137	K	14	TT	6.50	2430/2300	930/930
	9.00R20	18	144/142	K	15.5	TT	7.00	2800/2650	900/900
	10.00R20	18	149/146	K	16	TT	7.50	3250/3000	930/930
	11.00R20	18	152/149	K	17	TT	8.00	3550/3250	930/930
	12.00R20	20	156/153	K	17.5	TT	8.50	4000/3650	900/900
	12.00R24	20	160/157	M	16	TT	8.50	4500/4125	900/900
	11R22.5	16	146/143	M	15	TL	8.25	3000/2725	830/830
	12R22.5	18	152/149	M	16	TL	9.00	3550/3250	930/930
	13R22.5	18	154/151	M	16	TL	9.75	3750/3450	830/830
	315/80R22.5	20	156/150	K	16	TL	9.00	4000/3350	850/850
WS128	10.00R20	18	149/146	K	16	TT	7.50	3250/3000	930/830
	11.00R20	18	152/149	K	16.5	TT	8.00	3550/3250	930/930
	12.00R20	20	156/153	K	17	TT	8.50	4000/3650	900/900
	12.00R24	20	160/157	K	16	TT	8.50	4500/4125	900/900
WS138	11.00R20	18	152/149	K	20	TT	8.00	3550/3250	930/930
	12.00R20	20	156/153	M	21	TT	8.50	4000/3650	900/900
	11R22.5	16	146/143	M	16	TL	8.25	3000/2725	830/830
	12R22.5	18	152/149	M	16	TL	9.00	3550/3250	930/930
	315/80R22.5	20	156/150	K	16	TL	9.00	4000/3350	850/850
WS158	11.00R20	18	152/149	K	16.5	TT	8.00	3550/3250	930/930
WS168	11.00R20	18	152/149	K	16.5	TT	8.00	3550/3250	930/930
WS188	12.00R24	20	160/157	K	16	TT	8.50	4500/4125	900/900
WS616	10.00R20	18	149/146	K	16.5	TT	7.50	3250/3000	930/930
	12.00R20	20	156/153	D	18.5	TT	8.50	4000/3650	900/900
WS618	11.00R20	18	152/149	D	23.5	TT	8.00	3550/3250	930/930
	12.00R20	20	156/153	K	24.5	TT	8.50	4000/3650	900/900
WS626	10.00R20	18	149/146	K	15	TT	7.50	3250/3000	930/930
	11.00R20	18	152/149	D	15.5	TT	8.00	3550/3250	930/930
WS628	11.00R20	18	152/149	D	23.5	TT	8.00	3550/3250	930/930
	12.00R20	20	156/153	M	24.5	TT	8.50	4000/3650	900/900
	295/80R22.5	18	152/149	K	21	TL	9.00	3550/3250	900/900

PATTER	SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
WS636	7.50R16	14	144/142	K	15.5	TT	7.00	2800/2650	900/900
	8.25R16	16	149/146	K	16.5	TT	7.50	3250/3000	930/930
	9.00R20	16	152/149	D	19	TT	8.00	3550/3250	930/930
	10.00R20	18	149/146	D	22.5	TT	7.50	3250/3000	930/930
	11.00R20	18	152/149	D	23.5	TT	8.00	3550/3250	930/930
	12.00R20	20	156/153	K	24.5	TT	8.50	4000/3650	900/900
WS638	12.00R20	20	156/153	L	19	TT	8.50	4000/3650	900/900
WS648	7.50R16	14	122/118	L	15	TT	6.00G	1500/1320	770/770
	8.25R16	16	128/124	K	15.5	TT	6.50H	1800/1600	770/770
	9.00R20	16	144/142	K	17.5	TT	7.00	2800/2650	900/900
	10.00R20	18	149/146	K	19	TT	7.50	3250/3000	930/930
	11.00R20	18	152/149	K	19.5	TT	8.00	3550/3250	930/930
	12.00R20	20	156/153	K*	21.5	TT	8.50	4000/3650	900/900
WS658	10.00R20	18	149/146	D	22.5	TT	7.50	3250/3000	930/930
	11.00R20	18	152/149	D	23.5	TT	8.00	3550/3250	930/930
	12.00R20	20	156/153	D	24.5	TT	8.50	4000/3650	900/900
WS666	9.00R20	16	144/142	K	15.5	TT	7.00	2800/2650	900/900
	10.00R20	18	149/146	K	16.5	TT	7.50	3250/3000	930/930
	11.00R20	18	152/149	K	19	TT	8.00	3550/3250	930/930
	12.00R20	20	156/153	K	19	TT	8.00	3550/3250	930/930
WS668	10.00R20	18	149/146	K	16.5	TT	7.50	3250/3000	930/930
	11.00R20	18	152/149	K*	17.5	TT	8.00	3550/3250	930/930
WS678	12.00R20	20	156/153	D	21.5	TT	8.50	4000/3650	900/900
WS688	12.00R24	20	160/157	K	21	TT	8.50	4500/4125	900/900
WS689	315/80R22.5	20	156/150	K*	16	TL	9.00	4000/3350	900/900
	12.00R24	20	160/157	K*	16	TT	8.50	4500/4125	930/930
WS698	11.00R20	18	152/149	D	23.5	TT	8.00	3550/3250	930/930
	12.00R20	20	156/153	L	24.5	TT	8.50	4000/3650	900/900
	13R22.5	18	154/151	M	15.5	TL	9.75	3750/3450	830/830

PATTER	SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH (mm)	TUBE	STANDARD RIM	MAX LOAD (kg)	MAX PRESSURE (kPa)
WS712	11R22.5	16	146/143	M	15	TL	8.25	3000/2725	830/830
	12R22.5	18	152/149	M	15	TL	9.00	3550/3250	930/930
	295/80R22.5	18	152/149	M	15	TL	9.00	3550/3250	900/900
	315/70R22.5	20	154/150	M*	14.5	TL	9.00	3750/3350	900/900
	315/80R22.5	20	156/150	L	15	TL	9.00	4000/3350	850/850
WS713	11R22.5	16	146/143	M	14.5	TL	8.25	3000/2725	830/830
	11R24.5	18	149/146	M	15	TL	8.25	3250/3000	830/830
WS718	12R22.5	18	144/142	K	15.5	TL	7.00	2800/2650	900/900
WS766	385/65R22.5	20	160	K	16	TL	11.75	4500	900
WS767	385/65R22.5	20	144/142	K	15.5	TL	7.00	2800/2650	900/900
WS788	295/80R22.5	18	152/149	M	15	TL	9.00	3550/3250	900/900
WS800	11R22.5	16	146/143	M	18.5	TL	8.25	3000/2725	830/830
	12R22.5	18	152/149	M	19	TL	9.00	3550/3250	930/930
	11R24.5	18	149/146	K	18.5	TL	8.25	3250/3000	830/830
	13R22.5	18	154/151	M	18	TL	9.75	3750/3450	830/830
WS806	11R22.5	16	146/143	M	19.5	TL	8.25	3000/2725	830/830
	12R22.5	18	152/149	M	19.5	TL	9.00	3550/3250	930/930
	295/80R22.5	18	152/149			TL	9.00	3550/3250	900/900
WS808	11R22.5	16	146/143	M	17.5	TL	8.25	3000/2725	830/830
	12R22.5	18	152/149	M	18	TL	9.00	3550/3250	930/930
WS816	295/80R22.5	18	152/149	M	19.5	TL	9.00	3550/3250	900/900
	315/70R22.5	20	154/150	L*	19.5	TL	9.00	3750/3350	900/900
	315/80R22.5	20	156/150	L	19.5	TL	9.00	4000/3350	850/850
WS818	12R22.5	18	152/149	K	15.5	TL	7.00	2800/2650	900/900
WS826	11R22.5	16	146/143	M	22.5	TL	8.25	3000/2725	830/830
	12.00R24	20	160/157	K*	24	TT	24	4500/4125	900/900
	315/80R22.5	20	156/150	L	20	TL	20	4000/3350	850/850