




HANMIX

PCR

The Perfect Fit For Your Car
Product parameter manual

Tel: +86 532 80920608
Email: info@hanmix.net
Web: www.hanmix.net





WHY HANMIX?

HANMIX is an international brand with 40 years' experience in Tyre and Tyre Accessories business. HANMIX is not only a brand name, but a way for a better life. You can find security, safety and high quality life in the HANMIX World.



HANMIX THE QUALITY

HANMIX is committed to conducting comprehensive assessments of product quality, price, ability to supply our clients locally and internationally. All HANMIX products comply with international quality standards and are respected throughout the world.

-----WWW.HANMIX.NET

Quality Control:

HANMIX provides quality and quantity inspections, and offers a warranty for products purchased.



Inspected each tyre from production to the warehouse to the markets.
Inspected each tyre by serial number, tread depth and weight.
Inspected each tyre by international laboratory standards.

HANMIX PASSENGER CAR TIRE

THE PERFECT FIT FOR YOUR CAR

ECO SERIES	ECO 01	HP	P.02
------------	--------	----	------

WINTER TIRE	SNOW FORCE	SNOW	P.03
-------------	------------	------	------

GRANDRANK SERIES	GRANDRANK HX01	HP	P.05
	GRANDRANK HX02	HP	P.06
	GRANDRANK HX03	UHP	P.07
	GRANDRANK HX05	AT	P.08
	GRANDRANK HX07	UHP	P.09
	GRANDRANK LT02	LTR	P.10
	GRANDRANK HX21	SUV	P.11
	GRANDRANK HX22	AT	P.12
	GRANDRANK HX23	AT	P.13

CLASSIC SERIES	CLASSIC CL01	HP	P.14
	CLASSIC CL02	LTR	P.15
	CLASSIC CL03	AT	P.17

CLASSIC SERIES	CLASSIC CL04	LTR	P.18
	CLASSIC CL05	LTR	P.19
	CLASSIC CL06	LTR	P.20
	CLASSIC CL07	SUV	P.21
	CLASSIC CL08	UHP	P.22
	CLASSIC CL09	SUV	P.23
	CLASSIC CL10	SUV	P.24
	CLASSIC CL11	HP	P.25
	CLASSIC CL12	HP	P.26
	CLASSIC CL13	UHP	P.28
	CLASSIC CL14	AT	P.29
	CLASSIC CL15	LTR	P.31
	CLASSIC CL16	AT	P.32
	CLASSIC CL17	MT	P.33


MIX SERIES	MIX-200	LTR	P.34
------------	---------	-----	------

HP TIRE

Applicable Models



ECO 01

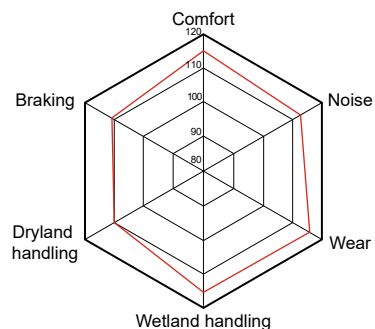

Product features:

Widened shoulder tread design increases contacting area, providing better driving stability and reliability.


Continuous straight center rib design provides optimized ground contact area, guarantees better driving safety.

Excellent grip and handling performance on wet land.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
175/70R12 WSW	80T	5J	511	177	450	250
185/60R13 WSW	80H	5½J	552	189	450	250
175/70R13	82T	5J	576	177	475	250
175/65R14	82H	5	584	177	475	250
175/70R14	84H	5J	602	177	500	250
175/70R14	84T	5	602	177	500	250
185/70R14	88T	5.5	616	189	560	250
195/70R14	91H	6	630	201	615	250
185/65R15	88H	5.5	621	189	560	250
195/65R15	91V	6J	635	201	615	250
195/65R15	91V	6	635	201	615	280
205/65R15	94V	6	647	209	670	280
215/65R15	98H	6½J	686	221	750	250
205/70R15	96T	6	669	209	710	250
225/70R15 WSW	100H	6½J	697	228	800	250
205/55R16	91V	6½J	632	214	615	250
205/55R16	91V	6.5	632	214	615	280
215/60R16	95H	6.5	664	221	690	250
215/60R16	95V	6½J	664	221	690	250
205/65R16	95H	6J	672	209	690	250
215/55R17	98W XL	7J	668	226	750	290

WINTER TIRE

Applicable
Models

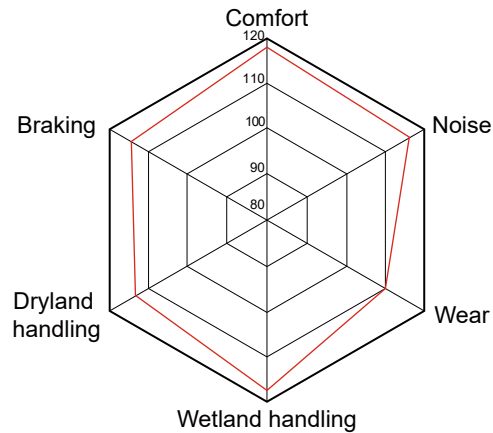

Product features:

Assisted groove design strengthens grip, drainage and braking performance. Center consecutive tread pattern design, ensure the stability of straight driving.

Lateral three-dimensional steel disc improves tread elasticity, enhances grip and safe handling performance on ice and snow road.

V-shape groove design improves excellent handling, dry/wet grip, drainage and snow performance.

The three-dimensional steel disc design in the shoulder improves friction between tread and ice road, meanwhile reduces noise. Thus better comfort and safety performance are provided.



SNOW FORCE

Size	Load Index	Speed	SW (mm)	OD (mm)
175/70R13	82	T	177	576
175/65R14	82	H	177	584
170/70R14	84	T	177	602
185/60R14	82	H	189	578
185/65R14	86	H	189	596
185/60R15	88XL	T	189	603
185/65R15	92XL	T	189	621

Size	Load Index	Speed	SW (mm)	OD (mm)
195/55R15	89XL	H	201	595
195/60R15	88	H	201	615
195/65R15	91	H	201	635
205/65R15	94	H	209	647
215/75R15	100	T	216	703
195/55R16	91XL	H	201	620
205/55R16	94XL	H	214	632

SNOW FORCE

Size	Load Index	Speed	SW (mm)	OD (mm)
205/60R16	96XL	H	209	652
215/55R16	97XL	V	226	642
215/60R16	99XL	H	221	664
215/65R16	102XL	H	221	686
215/70R16	100	T	221	708
235/60R16	104XL	H	240	688
235/70R16	109XL	T	240	736
205/50R17	93XL	V	214	638
215/50R17	95XL	V	226	648
225/50R17	98XL	V	233	658
215/55R17	98XL	V	226	668
215/60R17	100XL	H	221	690
225/45R17	94XL	V	225	634
225/55R17	101XL	V	233	680
225/60R17	99	H	228	702
225/65R17	102	H	228	724
235/45R17	97XL	V	236	644
235/55R17	103XL	V	245	690
235/65R17	108XL	H	240	738
265/65R17	112	H	272	776
215/55R18	95	V	226	693
225/40R18	92XL	V	230	637
225/45R18	95XL	V	225	659
225/50R18	99XL	V	233	683
225/55R18	98	V	233	705
225/60R18	104XL	H	228	727


Size	Load Index	Speed	SW (mm)	OD (mm)
255/40R18	99XL	V	260	661
235/45R18	98XL	V	236	669
235/50R18	101XL	V	245	693
235/55R18	104XL	V	245	715
235/60R18	107XL	H	240	739
245/40R18	97XL	V	248	653
245/45R18	100XL	V	243	677
245/50R18	104XL	V	253	703
225/55R18	109XL	V	265	737
265/60R18	110	H	272	775
265/70R18	116	T	272	829
285/60R18	116	H	292	799
225/45R19	96XL	V	225	685
235/35R19	91XL	V	241	647
235/55R19	101	V	245	741
245/45R19	102XL	V	243	703
245/50R19	105XL	V	253	729
245/55R19	103	V	253	753
255/35R19	96XL	V	260	661
255/50R19	107XL	V	265	739
255/55R19	111XL	V	265	763
275/40R19	105XL	V	278	703
245/45R20	103XL	V	243	728
255/40R20	101XL	V	260	712
255/45R20	105XL	V	255	738
275/45R20	110XL	V	273	756

RUN FLAT

No.	Size	LI/SS
1	225/40ZRF18	92V
2	225/45ZRF18	95V XL
3	235/50ZRF18	101V
4	235/55ZRF18	104V
5	245/40ZRF18	97V XL
6	245/45ZRF18	100V
7	245/50ZRF18	100V
8	255/40ZRF18	95V
9	255/55ZRF18	109V
10	225/45ZRF19	96V XL
11	235/55ZRF19	105V XL
12	245/45ZRF19	98V
13	245/50ZRF19	101V
14	255/50ZRF19	107V XL
15	275/40ZRF19	101V

HP TIRE

Applicable
Models

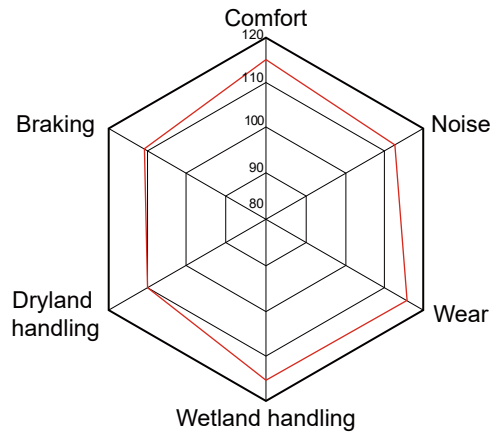

Product features:

Criss-cross grooves design enhance water evacuation, effectively prevent tire lateral slip on wet road.

Central rib combined with horizontal grooves provides nice stability, excellent acceleration and brake performance at high speed.



GRANDRANK HX01


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
215/65R16	98H	6½J	686	221	750	250
215/70R16	100H	6½J	708	221	800	250

HP TIRE

Applicable
Models



GRANDRANK HX02

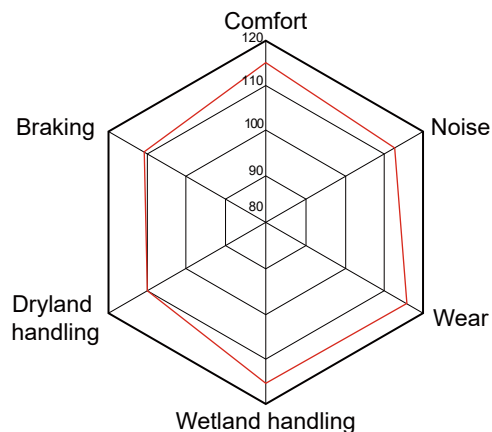

Product features:

Four wide grooves design provide effective drainage and sufficient wet safety performance.

Design of central rib with sipes promotes the rigidity, help to balance high-speed performance and grip performance on wet land.


The compact shoulder design provide excellent handling performance with low noise.

Multiple blade groove pattern provide excellent grip and handling performance on wet land.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
225/65R17	106H	6½J	724	228	950	290
235/55R17	103V	7½J	690	245	875	290
245/65R17	111H	7J	750	248	1090	290
235/55R18	104V	7½J	715	245	900	290
265/65R18	114H	8J	801	272	1180	250

UHP TIRE

Applicable
Models

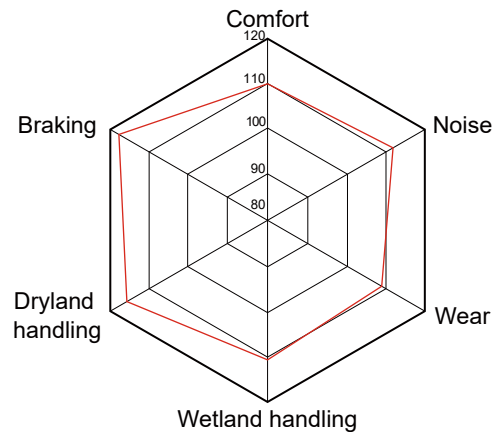

Product features:

Smooth asymmetric pattern, ensuring better controlling performance of outside while enhancing drainage of inside.

Four wide deep grooves keep excellent wetting performance and handling stability.

Outside shoulder reinforcement improving handling performance at curve, effectively preventing abnormal wear.

Bended steel groove, effectively reducing the noise while enlarging ground contact area.



GRANDRANK HX03


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
225/60R17	103V	6½J	702	228	875	290
245/45R20	103W	8J	728	243	875	290



GRANDRANK HX05

AT TIRE

Applicable
Models

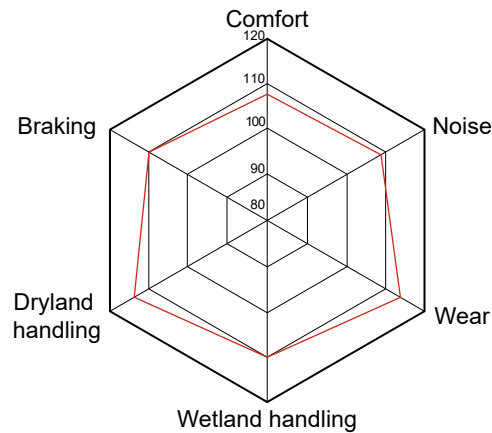

Product features:

Good traction and bite in rough conditions


Stronger cornering and excellent tread wear

Offers extra protection against many hazards commonly encountered in severe off road conditions.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
235/85R16LT	120/116S	6½J	806	235	1400/1250	550

UHP TIRE

Applicable
Models

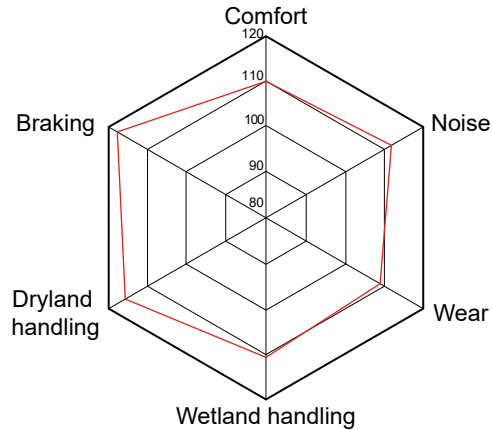

Product features:

Asymmetric pattern design provides excellent grip on curves, ensuring stability during driving and offering excellent water drainage performance.

Optimized pitch width and arrangement and pitch displacement design effectively reduce noise during driving.



GRANDRANK HX07


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
215/50R17	91V	7	648	226	615	283
215/55ZR17	98W XL	7	668	226	750	336
225/50ZR17	98W XL	7	658	233	750	338
225/55ZR17	101W XL	7	680	233	825	336
235/55R17	99V	7.5	690	245	775	281
225/45R18	95W XL	7.5	659	225	690	336
245/45ZR18	100W XL	8	667	243	800	336
245/45ZR19	98W	8	703	243	750	302
255/45ZR19	104W XL	8	713	255	900	338
245/45ZR20	103W XL	8	728	243	875	336

LTR TIRE

Applicable Models



GRANDRANK LT2

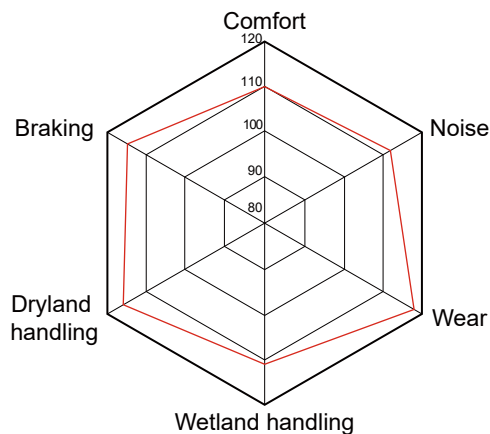

Product features:

The use of straight longitudinal grooves improves the drainage of the tire, thereby improving the waterproof and drift performance.


Super wear-resistant formula, providing excellent durability and wear resistance.

Continuous shoulder design improves wear and tear resistance.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
195R14C WSW	106/104P	5½J	666	198	950/900	450
205R14C WSW	109/107N	6J	686	208	1030/975	450
205/70R15C WSW	106/104Q	6J	669	209	950/900	450
215/70R15C WSW	109/107R	6½J	683	221	1030/975	450
225/70R15C WSW	112/110R	6½J	697	228	1120/1060	450

SUV TIRE

Applicable
Models

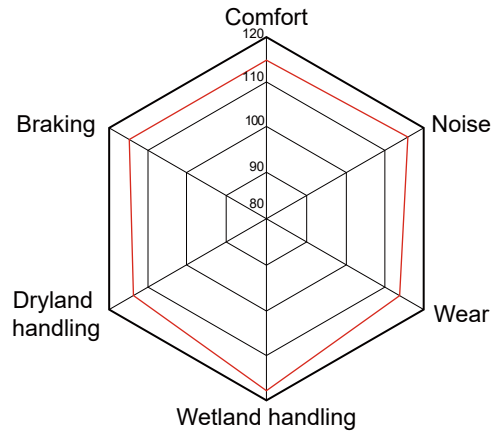

Product features:

Four wide grooves design provide effective drainage and sufficient wet safety performance.

The compact shoulder design provide excellent handling performance with low noise.

Design of central rib with sipes promotes the rigidity, help to balance high-speed performance and grip performance on wet land.

Multiple blade groove pattern provide excellent grip and handling performance on wet land.



GRANDRANK HX21


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
265/70R17	115T	8J	804	272	1215	300
265/60R18	110H	8J	775	272	1060	300
285/50R20	116V XL	9J	794	297	1250	340



GRANDRANK HX22

AT TIRE

Applicable Models

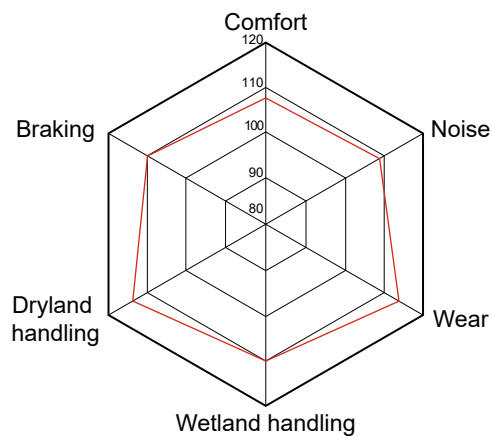

Product features:

Prevent stone nipped, enhance the ability to get rid of the stone.

Solid staggered central rib design ensures straight-line driving stability and safety.


Enhance the block rigidity, endurance, weight-carrying ability and steering qualities during driving.

Promote the grip performance on wet and dry land, enhance the tractive performance.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
265/70R16	112T	8J	778	272	1120	300
275/70R16	114T	8J	792	279	1180	300
265/65R17	112T	8J	776	272	1120	300
285/65R17	116H	8½J	802	292	1250	300
285/60R18	120H XL	8½J	799	292	1400	340

AT TIRE

Applicable
Models



Product features:

Aggressive all-terrain traction on and off-road.

Robust sidewall design.

Staggered shoulder blocks for greater maneuverability in soft soil.

Advanced tread design for longer wear.



GRANDRANK HX23


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
215/75R15LT	100/97S	6.00J	701	216	1765/1610	50
235/75R15LT	104/101S	6.50J	734	236	1985/1820	50
31x10.50R15LT	109S	8.50J	775	269	2270	50
215/70R16LT	100/97R	6.50J	706	221	1765/1610	50
235/70R16LT	104/101S	7.00J	734	241	1985/1820	50
245/70R16LT	113/110S	7.00J	749	249	2535/2335	65
245/75R16LT	120/116S	7.00J	772	249	3042/2778	80
265/70R16LT	121/118S	8.00J	776	268	3195/2910	80
265/75R16LT	123/120R	7.50J	802	268	3415/3085	80
275/70R16LT	119/116S	8.00J	790	279	3000/2755	65
285/75R16LT	126/123R	8.00J	832	285	3750/3415	80
265/65R17LT	120/117S	8.00J	774	268	3085/2835	80
265/70R17LT	121/118S	8.00J	802	268	3195/2910	80
285/70R17LT	121/118R	8.50J	830	291	3195/2910	80
315/70R17LT	121/118S	9.50J	872	320	3195/2910	80
35x12.50R17LT	121R	10.00J	876	318	3195	65
265/60R18LT	119/116S	8.00J	775	272	3000/2755	80
275/65R18LT	123/120R	8.00J	813	279	3415/3085	80
285/65R18LT	125/122R	8.50J	826	292	3640/3305	80
265/70R18LT	124/121R	8.00J	828	272	3525/3195	80
285/50R20LT	119/116R	9.00J	798	298	2992/2750	80
275/60R20LT	119/116S	8.00J	836	279	3000/2755	80

HP TIRE

Applicable Models



CLASSIC CL01




Product features:

- Energy-saving and comfortable driving.
- Excellent the hydroplaning and wet performance.
- Good handling and comfort performance.
- Low noise and high tread wear.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
155/65R13	73T	4.50B	532	157	365	300
★ 165/65R13	77T	5.00B	544	170	412	300
★ 175/60R13	77T	5.00B	540	177	412	300
★ 175/70R13	82T	5.00B	576	177	475	300
★ 185/70R13	86T	5.50B	590	189	530	300
★ 175/65R14	82H	5J	584	177	475	300
★ 175/70R14	84T	5J	602	177	500	300
★ 185/60R14	82H	5½J	578	189	475	300
★ 185/65R14	86H	5½J	596	189	530	300
★ 185/70R14	88T	5½J	616	189	560	300
★ 195/60R14	86H	6J	590	201	530	300
★ 195/70R14	91T	6J	630	201	615	300
★ 205/60R14	88H	6J	602	209	560	300
175/50R15	75H	5½J	557	182	387	300
185/55R15	82H	6J	585	194	475	300
★ 185/65R15	88H	5½J	621	189	560	300
★ 195/50R15	82H	6J	577	201	475	300
195/55R15	85V/H	6J	595	201	515	300
★ 195/60R15	88H	6J	615	201	560	300
★ 195/65R15	91H	6J	635	201	615	300
★ 205/60R15	91H	6J	627	209	615	300
★ 205/65R15	94H	6J	647	209	670	300
★ 205/55R16	91H	6½J	632	214	615	300
★ 205/60R16	92V	6J	652	209	630	300
★ 215/60R16	95V/H	6½J	664	221	690	300

LTR TIRE

Applicable
Models

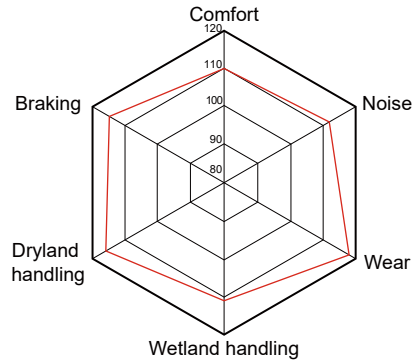

Product features:

Enhanced grip on off-road surface.

Excellent water dispersion and hydroplaning resistance.

Improved heat dissipation and grip performance.

Quiet driving performance at high speed.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
155R12LT 6PR	83/81N	4.50B	553	157	487/462	350
155R12C 6PR	83/81N	4.50B	553	157	487/462	350
155R12LT 8PR	88/86N	4.50B	553	157	560/530	450
★ 155R12C 8PR	88/86N	4.50B	553	157	560/530	450
155R13LT 8PR	90/88N	4.50B	578	160	600/560	450
155R13C 8PR	90/88N	4.50B	578	160	600/560	450
165R13LT 8PR	94/93Q	4.50B	594	165	670/650	450
165R13C 8PR	94/93Q	4.50B	594	165	670/650	450
165R14C 8PR	97/95Q	4½J	620	165	730/690	450
165R14LT 8PR	97/95Q	4½J	620	165	730/690	450
175R13LT 8PR	97/95Q	5.00B	610	177	730/690	450
★ 175R13C 8PR	97/95Q	5.00B	610	177	730/690	450
175R14C 8PR	99/98Q	5J	636	177	775/750	450
175R14LT 8PR	99/98Q	5J	636	177	775/750	450




CLASSIC CL02

CLASSIC CL02

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (Kg)	Inflated Pressure (Kpa)
185R14LT 8PR	102/100Q	5½J	652	189	850/800	450
★ 185R14C 8PR	102/100Q	5½J	652	189	850/800	450
195R14LT 8PR	105/103Q	5½J	668	196	925/875	450
★ 195R14C 8PR	106/104Q	5½J	668	196	950/900	450
205R14LT 8PR	107/105R	6J	684	208	975/925	450
205R14C 8PR	109/107R	6J	684	208	1030/975	450
215R14LT 8PR	110/108R	6J	700	218	1060/1000	450
215R14C 8PR	112/110R	6J	700	218	1120/1060	450
215/75R14LT 8PR	104/101Q	6J	678	216	900/825	450
215/75R14C 8PR	112/110Q	6J	678	216	1120/1060	475
185R15LT 8PR	103/102S	5½J	677	189	875/850	450
185R15C 8PR	103/102S	5½J	677	189	875/850	450
195R15LT 8PR	106/104Q	5½J	693	196	950/900	450
★ 195R15C 8PR	106/104Q	5½J	693	196	950/900	450
195/70R15LT 8PR	99/96R	6J	655	201	775/710	450
★ 195/70R15C 8PR	104/102R	6J	655	201	900/850	450
205/70R15C 8PR	106/104R	6J	669	209	950/900	450
215/70R15C	109/107R	6½J	683	221	1030/975	450
225/70R15LT 8PR	106/103R	6½J	697	228	950/875	450
225/70R15C 8PR	112/110R	6½J	697	228	1120/1060	450
215/75R16C 8PR	113/111R	6J	728	216	1150/1090	475
225/65R16C 8PR	112/110R	6½J	698	228	1120/1060	475
235/65R16C 8PR	115/113R	7J	712	240	1215/1150	475

AT TIRE

Applicable
Models

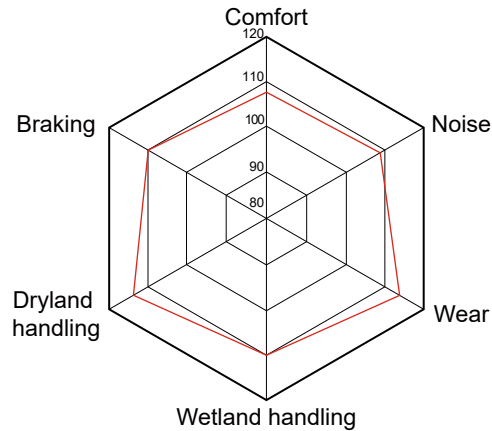

Product features:

Improved grip and traction, sufficiently reduces braking distance under dry or wet.

Good ability to break water surface tension and reduces sliding on wet.

Great resistance to impact and load capability.

Low noise during driving.



CLASSIC CL03


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
★ 205R16C 8PR	110/108R	6J	736	208	1060/1000	450
205R16LT 8PR	110/108R	6J	736	208	1060/1000	450
255/70R15C 6PR	112/110S	7½J	739	260	1120/1060	375
255/70R15LT 6PR	112/110S	7½J	739	260	1120/1060	375
★ 255/70R15C 8PR	113/110S	7½J	739	260	1150/1060	450
★ 265/70R16	112T	8J	778	272	1120	300
★ 275/70R16	114T	8J	792	279	1180	300
★ 265/65R17	112S	8J	776	272	1120	300
★ 275/65R17	115T	8J	790	279	1215	300
★ 265/70R17	115T	8J	804	272	1215	300
265/60R18	110H	8J	775	272	1060	300
★ 285/60R18	116T	8½J	799	292	1250	300



CLASSIC CL04

LTR TIRE

Applicable
Models

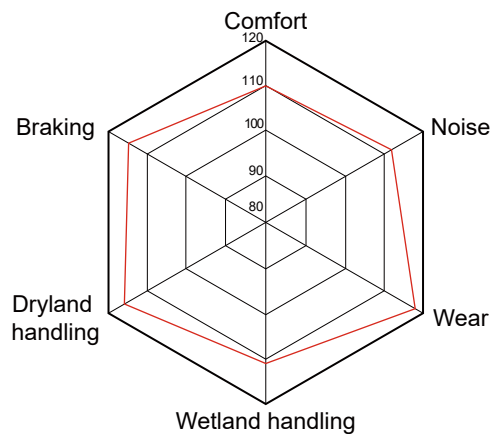

Product features:

Good straight line stability and steering performance.

Great loading capability.


Good drainage and safty performance on wet road.

More quite driving experience.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
7.50R16LT 8PR	114/112S	6.00G	805	215	1180/1120	475
★ 7.50R16LT 10PR	116/111S	6.00G	805	215	1250/1090	560
★ 225/95R16C	118/116Q	6J	834	223	1320	475

LTR TIRE

Applicable
Models

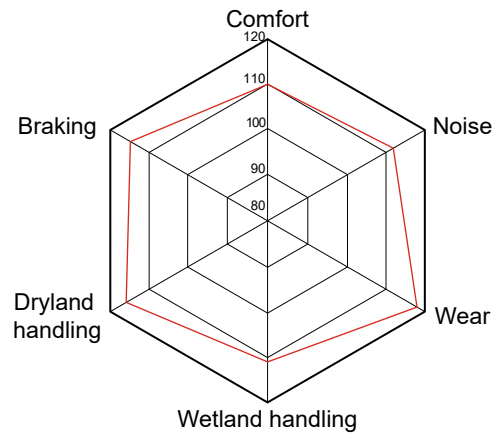

Product features:

Unique tread compound that offers superior cut and chip resistance.

Long life and exceptional irregular wear resistance.

Good load-bearing capacity.



CLASSIC CL05


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
★ 7.50R16C 8PR	114/112S	6.00G	805	215	1180	475



CLASSIC CL06

LTR TIRE

Applicable Models

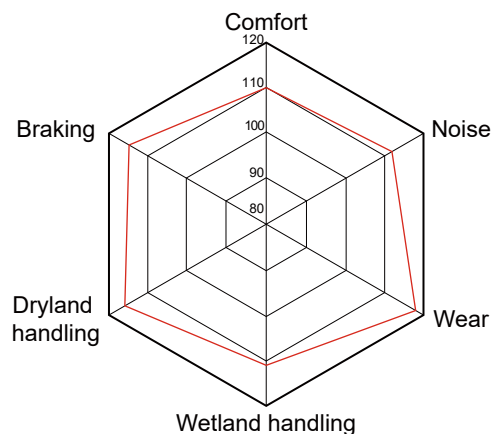

Product features:


Excellent high speed road durability and stability.

Straight rib pattern ensures firm grip on soft sand.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
225/95R16C 10PR	122/118Q	6J	834	223	1500	550
★ 225/95R16C 8PR	118/116Q	6J	834	223	1320	475
★ 245/85R16	114S	7J	822	248	1180	300

SUV TIRE

Applicable
Models

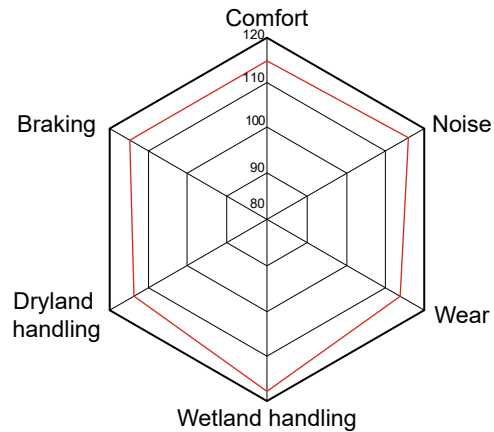

Product features:

Comfort, quiet and durability performance.

Excellent the hydroplaning and wet performance.

Good steering and stability at high speed.

Excellent ride and low noise performance.

Stiff tread and uniform wear.




CLASSIC CL07

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
★ 265/65R18	114H	8J	801	272	1180	300
★ 275/65R18	116H	8J	815	279	1250	300
★ 285/50R20	116V XL	9J	794	297	1250	340



CLASSIC CL08

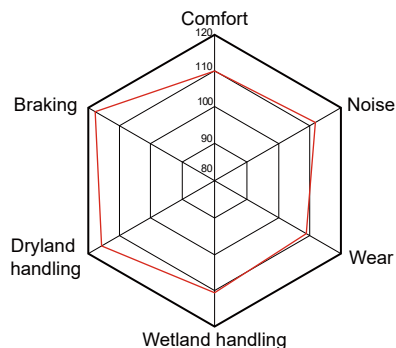

UHP TIRE

Applicable Models



Product features:

Excellent grip ensures the stability of straight and curved in wet terrain.

Strong block effectively enhances side cornering traction.


Rapid drainage performance in wet terrain.

Optimized pattern design reduce tire noise and improves vehicle safety.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
205/50R15	86V	6½J	587	214	530	300
205/55R15	88V	6½J	607	214	560	300
225/60R15	96V	6½J	651	228	710	300
195/55R16	91V XL	6J	620	201	615	340
★ 195/60R16	89H	6J	640	201	580	300
★ 205/55R16	91V	6½J	632	214	615	300
205/60R16	92V	6J	652	209	630	300
★ 205/65R16	95H	6J	672	209	690	300
215/55ZR16	93W	7J	642	226	650	340
215/60R16	95V	6½J	664	221	690	300
★ 215/65R16	98H	6½J	686	221	750	300
225/60R16	98H	6½J	676	228	750	300
★ 235/60R16	100H	7J	688	240	800	300
205/40ZR17	84W XL	7½J	596	212	500	340
205/45ZR17	88W XL	7J	616	206	560	340
★ 215/45ZR17	91W XL	7J	626	213	615	340
215/50ZR17	95W XL	7J	648	226	690	340
★ 215/55ZR17	98W XL	7J	668	226	750	340
★ 225/45ZR17	94W XL	7½J	634	225	670	340
★ 225/50ZR17	98W XL	7J	658	233	750	340
★ 225/55R17	97V	7J	680	233	730	300
225/45ZR18	95W XL	7½J	659	225	690	340
★ 245/45ZR18	100W XL	8J	677	243	800	340

SUV TIRE

Applicable
Models

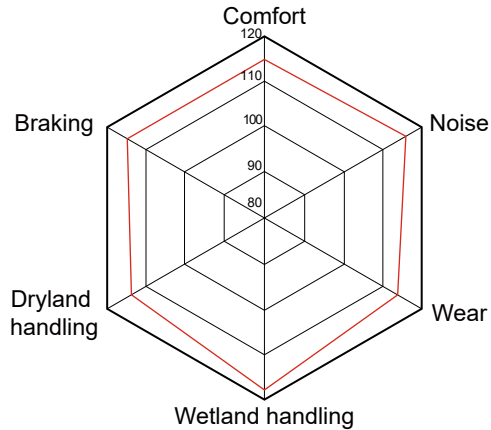

Product features:

Good straight, curved high-speed stability and wetland drainage performance.

Optimized pattern design enhances the lateral grip and improves vehicle safety.

Low driving noise ensure a quieter driving environment.



CLASSIC CL09


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
★ 215/70R16	100H	6½J	708	221	800	300
★ 235/70R16	106H	7J	736	240	950	300
275/70R16	114H/T	8J	792	279	1180	300
★ 215/60R17	96H	6½J	690	221	710	300
★ 225/60R17	99H	6½J	702	228	775	300
★ 225/65R17	102H	6½J	724	228	850	300
★ 235/65R17	104H	7J	738	240	900	300
265/65R17	112H	8J	776	272	1120	300
235/60R18	107V XL	7J	739	240	975	340

SUV TIRE

Applicable
Models



CLASSIC CL10

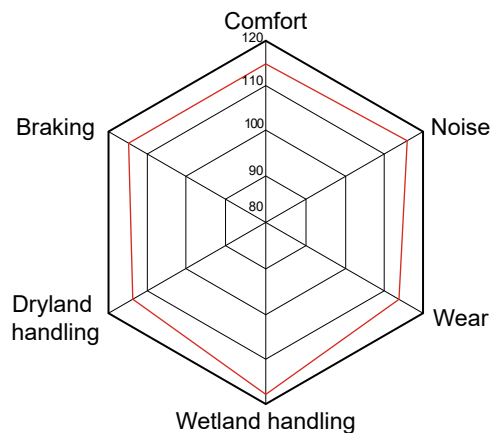

Product features:

Good straight, curved high-speed stability and wetland drainage performance.


Optimized pattern design enhances the lateral grip and improves vehicle safety.

Low driving noise ensure a quieter driving environment.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
225/70R16	103H	6½J	722	228	875	300
★ 245/70R16	107H	7J	750	248	975	300
265/70R16	112H/T	8J	778	272	1120	300
★ 245/65R17	107H	7J	750	248	975	300
265/70R17	115H/T	8J	804	272	1215	300
★ 235/55R18	104V XL	7½J	715	245	900	340
★ 265/60R18	110H	8J	775	272	1060	300
★ 225/55R18	98V	7J	705	233	750	300
225/60R18	100V	6½J	727	228	800	300
★ 245/60R18	105H	7J	751	248	925	300

HP TIRE

Applicable
Models

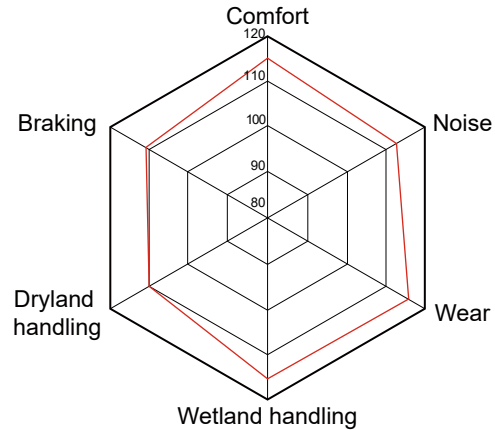

Product features:

Good quietness brings stable and comfortable driving experience.

Excellent handling performance can respond sensitively to various corners.

Deep grooves and outstanding tread compound for endurance and long-lasting use.



CLASSIC CL11



Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
135/70R12	65Q	4.00B	495	138	290	250
145/70R12	69T	4.50B	509	150	325	250
145/80R12	74T	4.00B	537	145	375	300
★ 175/70R12	80T	5.00B	551	177	450	300
★ 165/70R13	79T	5.00B	562	170	437	300
175/70R13	82T	5.00B	576	177	475	300
185/70R13	86T	5.50B	590	189	530	300
★ 185/65R14	86T	5½J	596	189	530	300
185/70R14	88T	5½J	616	189	560	300
205/70R14	95T	6J	644	209	690	300

HP TIRE

Applicable Models



CLASSIC CL12

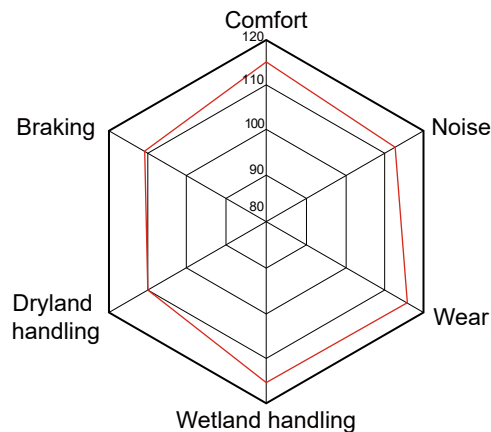

Product features:

Good steering performance and ride comfort.

Excellent hydroplaning and wet performance.

Good stability on dry ground, great response and sensitivity of high speed.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
155/70R12	73T	4.50B	523	157	365	250
165/70R12	77T	5.00B	537	170	412	250
135/80R13	60L	4.00B	546	138	250	240
135/80R13	74N XL	4.00B	546	138	375	340
145/60R13	66N	4.50B	504	150	300	300
145/80R13	75T	4.00B	562	145	387	300
145/80R13	79N XL	4.00B	562	145	437	340
155/65R13	73T	4.50B	532	157	365	250
155/70R13	75T	4.50B	548	157	387	250
155/80R13	79T	4.50B	578	157	437	240
165/55R13	70N	5.00B	512	170	335	300
165/65R13	77T	5.00B	544	170	412	250
165/70R13	79T	5.00B	562	170	437	250

CLASSIC CL12


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
165/70R13LT 6PR	88/86S	5.00B	562	170	560/530	375
165/70R13C 6PR	88/86S	5.00B	562	170	560/530	375
165/80R13	83T	4.50B	594	165	487	240
175/70R13	82T	5.00B	576	177	475	250
185/70R13	86T	5.00B	590	189	530	250
155/50R14	67T	5J	512	162	307	300
165/60R14	75H	5J	554	170	387	300
★ 165/65R14	79H	5J	570	170	437	300
165/70R14	81T	5J	588	170	462	250
165/80R14	85T	4½J	620	165	515	300
175/65R14	82H	5J	584	177	475	250
175/70R14	84T	5J	602	177	500	250
175/70R14LT 6PR	95/93Q	5J	602	177	690/650	375
175/70R14C 6PR	95/93Q	5J	602	177	690/650	375
185/60R14	82H	5½J	578	189	475	250
185/65R14	86H	5½J	596	189	530	250
185/70R14	88T	5½J	616	189	560	250
195/60R14	86H	6J	590	201	530	250
195/70R14	91T	6J	630	201	615	250
205/60R14	88H	6J	602	209	560	300
185/60R15	84H	5½J	603	189	500	300
185/65R15	88H	5½J	621	189	560	300
195/50R15	82H/V	6J	577	201	475	300
195/55R15	85H/V	6J	595	201	515	300
★ 195/60R15	88H	6J	615	201	560	300
195/65R15	91H	6J	635	201	615	250
205/60R15	91H/V	6J	627	209	615	300
205/65R15	94H	6J	647	209	670	250
215/65R15	96H	6½J	661	221	710	300

UHP TIRE

Applicable Models



CLASSIC CL13

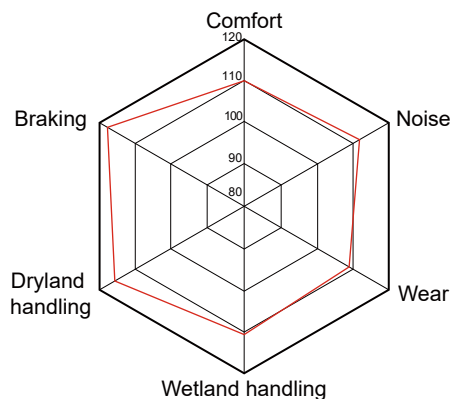

Product features:

Excellent high speed handling.

Excellent hydroplaning performance.


Fuel economy, great wet grip and braking performance.

Excellent ride and low noise driving experience.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
205/45R16	87V XL	7J	590	206	545	340
★ 205/50ZR17	93W XL	6½J	638	214	650	340
★ 205/55ZR17	95W XL	6½J	658	214	690	340
★ 235/55ZR17	103W XL	7½J	690	245	875	340
★ 215/55R18	95V	7J	693	226	690	300
235/45ZR18	94W	8J	669	236	670	300
★ 235/45ZR18	98W XL	8J	669	236	750	340
★ 235/50ZR18	101W XL	7½J	693	245	825	340
★ 225/45ZR19	96W XL	7½J	685	225	710	300
★ 225/55ZR19	103W XL	7J	731	233	875	300
★ 235/55R19	101W	7½J	741	233	825	300
★ 245/40ZR19	98W	8½J	679	248	750	340
★ 245/45ZR19	102W	8J	703	243	850	340
★ 245/55ZR19	107W XL	7½J	753	253	975	300
★ 245/45ZR20	103W	8J	728	243	875	340
★ 245/50ZR20	105W XL	7½J	754	253	925	300

AT TIRE

Applicable
Models

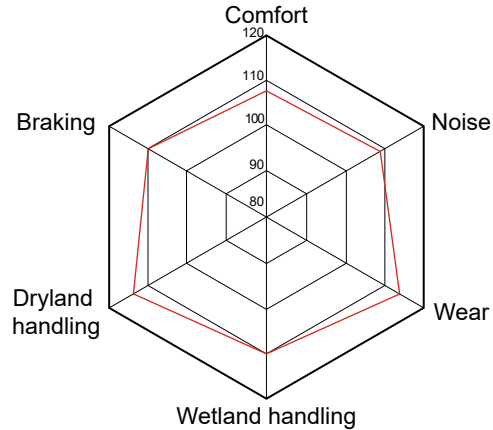

Product features:

Upgraded material offers good handling and ride comfort.

Two steel belts and plies enhance carcass strength.

Splice-free belt hoops ensure tire strength and driving safety.



CLASSIC CL14


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
175/80R14	88T	5J	636	177	560	300
LT215/75R14 6PR	98/95S	6J	678	216	750/690	350
205/60R15	91H	6J	627	209	615	300
205/65R15	94H	6J	647	209	670	300
205/70R15	96T	6J	669	209	710	300
225/70R15	100T	6½J	697	228	800	300
225/70R15LT	107/103S	6½J	697	228	975/875	450
31X10.50R15LT	109S	8½J	775	268	1030	350
31X10.50R15LT	114/111R	8½J	775	268	1180/1090	550

CLASSIC CL14

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
205/60R16	92H	6J	652	209	630	300
215/65R16	98T	6½J	686	221	750	300
235/60R16	100T	7J	688	240	800	300
235/70R16	106T	7J	736	240	950	300
245/70R16	107T	7J	750	248	975	300
255/70R16	111T	7½J	764	260	1090	300
265/70R16	112T	8J	778	272	1120	300
LT215/85R16	115/112R	6J	772	216	1215/1120	550
LT225/75R16	115/112R	6J	744	223	1215/1120	550
LT235/85R16	120/116R	6½J	806	235	1380/1260	550
LT245/70R16	120/116R	7J	750	248	1380/1260	550
LT245/75R16	120/116R	7J	774	248	1380/1260	550
LT265/70R16	121/118R	8J	778	272	1450/1320	550
LT265/70R16	123/120R	8J	778	272	1550/1400	550
LT265/75R16	123/120R	7½J	804	267	1550/1400	550
225/65R17	102T	6½J	724	228	850	300
235/60R17	102T	7J	714	240	850	300
235/65R17	104T	7J	738	240	900	300
265/65R17	112T	8J	776	272	1120	300
265/70R17	115T	8J	804	272	1215	300
LT265/65R17	120/117R	8J	776	272	1400/1285	550

LTR TIRE

Applicable Models

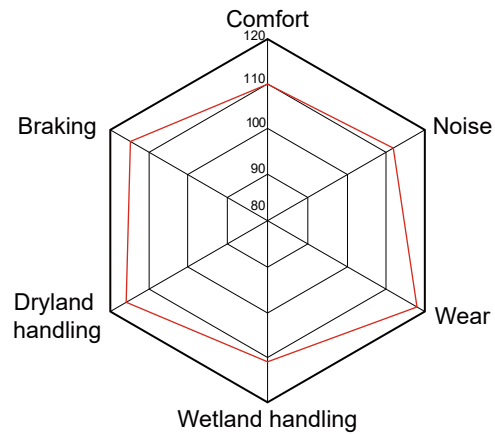

Product features:

4 Main grooves & sipes ensure optimal grip on wet roads.

Good performance on rain, snow, mud, and non-paved roads.

Low rolling resistance compound offers excellent fuel economy.

Low noise and more driving comfort.



CLASSIC CL15


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
185/75R16C	104/102R	5J	684	184	900/850	475



CLASSIC CL16

AT TIRE

Applicable
Models

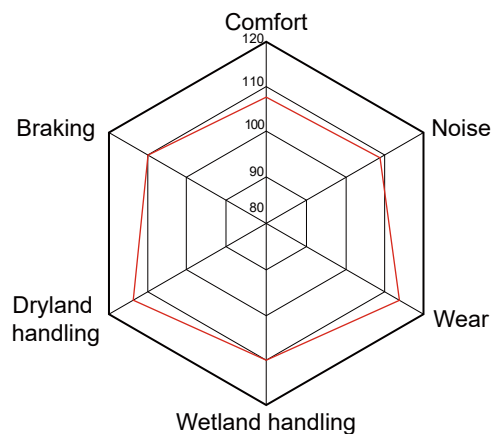

Product features:

Good high speed performance on complicated road surface.

Wavy groove design grips onto various road surfaces effectively.


Randomized groove distribution reduces noise.

Multiple tread block sizes improve traction and comfort.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
235/75R15C 6PR	104/101S	6½J	733	235	900/825	350
235/75R15LT 6PR	104/101S	6½J	733	235	900/825	350
235/75R15C 10PR	116/113S	6½J	733	235	1250/1150	550
235/75R15LT 10PR	116/113S	6½J	733	235	1250/1150	550

MT TIRE

Applicable
Models

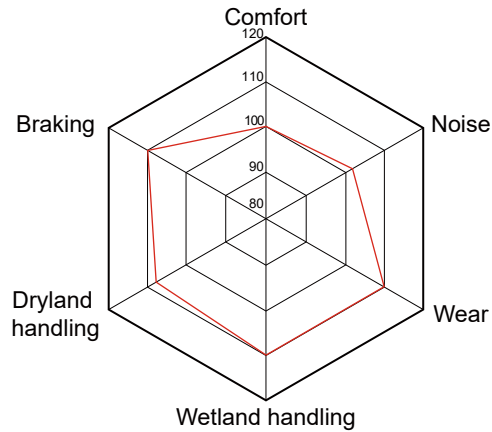

Product features:

Special tread compound tailored for MT application improves outstanding and tread wear.

Reinforced shoulder blocks and 3D sidewall improve pass-ability in harsh road.

Variable pitch design with large blocks improve grip and durability.



CLASSIC CL17


Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
LT235/75R15	104/101Q	6½J	733	235	900/825	350
31X10.50R15LT	109Q	8½J	775	268	1030	350
LT235/85R16	120/116Q	6½J	806	235	1380/1260	550
LT245/75R16	120/116Q	7J	774	248	1380/1260	550
LT255/70R16	120/117Q	7½J	764	260	1400/1285	550
LT265/70R16	110/107Q	8J	778	272	1060/975	350
LT265/70R16	117/114Q	8J	778	272	1285/1180	450
LT265/75R16	123/120Q	7½J	804	267	1550/1400	550
LT265/65R17	120/117Q	8J	776	272	1400/1285	550
LT265/70R17	121/118Q	8J	804	272	1450/1320	550



MIX-200

LTR TIRE

Applicable
Models

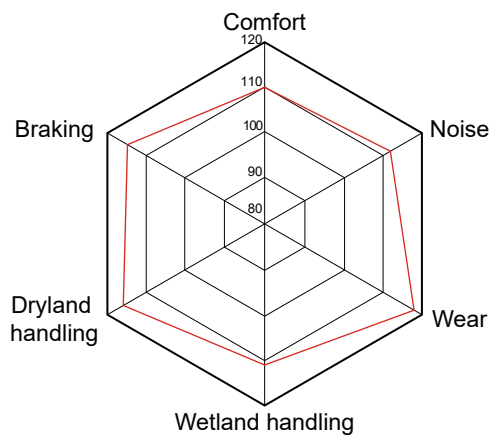

SIZE	PR	STD RIM	LOAD INDEX/ SPEED RATING	MAX LOAD (kg/lbs)		INFLATED PRESSURE (kPa/psi)		TIRE DIMENSION (mm)	
				SINGLE	DUAL	SINGLE	DUAL	SW	OD
700R16C	12	5.50F	115/110 N	1150/2535	1120/2469	515/74	515/74	200	775
750R16C	14	6.00G	122/118 L	1405/3295	1315/2899	740/107	740/107	215	805



HANMIX INTERNATIONAL CO., LTD

Tel: +86 532 80920608 Email: info@hanmix.net
Web: www.hanmix.net